





Button wire to Female Jack Plug prongs

Red => Prong 2
Black => GND




Uses male to male amp connectors



Female Jack Plug for button trigger

D4 => Prong 2
GND => Prong 1

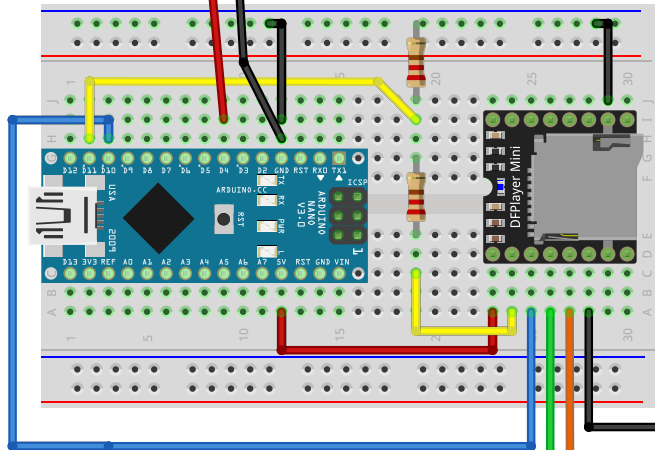

Arduino Nano
powered by USB-C
connection

Female Jack prongs to DFPlayer wiring pinout

1 - GND
2 - Right
3 - Left
4 - Empty

Voltage Divider

Resistor/Yellow - 1K
Resistor/Grey - 2K

Uses male to male connectors to speaker