


 REVISIONS

 INT
 REV.
 DESCRIPTION
 DATE
 APPROVED

 AI
 ADVANCE ISSUE
 06/05/2022

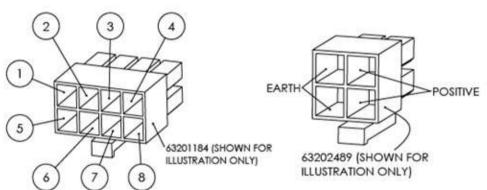

| Pin No. on 63201184 - 8 Way Connector | FUNCTION | PORTS ACTIVATED ON PSU |
|--|---|--|
| 1 | BLUE WARNING LIGHTS - REAR HALF OF BAR - LEFT/RIGHT MODE | 1, 3-5, 16-20 Plus Port 2 GATSO (Constantly ON) |
| 2 | BLUE WARNING LIGHTS - FRONT HALF OF BAR - LEFT/RIGHT MODE | 6-15 |
| 3 | RED WARNING LIGHTS - REAR HALF OF BAR - LEFT/RIGHT MODE (out of phase with BLUE in corresponding half of bar) | 3-5, 16-19 CROSS OVER CABLES |
| 4 | AMBER WARNING LIGHTS - AIRPORT MODE (ALL TOGETHER) | 6-8, 10-15 CROSS OVER CABLES |
| 5 | DIM Function (65%) | |
| 6 | FLASH PATTERN (SINGLE/DOUBLE/TRIPLE/QUAD) | - |
| 7 | NOT IN USE | NOT IN USE |
| 8 | NOT IN USE | NOT IN USE |
| | | |

| DMINIONS ARE HIMIGMENTS | | PHICH: AS DETAILS | | DO NOT SCALE DRAWING | | | |
|--|-----------|---|------------|----------------------|---------|------------|-------------------------|
| INTERPRETATION COMMISSION OF THE PROPERTY OF T | | SPECIFICATION: AS DETAILS TREATMENT: AS DETAILS | | | | | CALLIMITE ISAUL ROAL |
| | | | | | | | RMBIGHAI 842 IE |
| | HAME | SIGNATURE | DATE | mut: | 1000000 | 2250 | |
| DRAWN | G. SANGHA | | 04/05/2022 | 20 PORT OUTPUT PSU - | | | |
| CHED | | | | YELLOW/B |)W/BLUE | | |
| UPPVD CV94W | | | | | | | |
| TRACD | | | | | | | |
| PRST USED CINI. | | AS DETAILS | | 63202520 | | | А3 |
| | | | | SCALETIS | 9 | err i of i | |