Smart Parking Lot

Winter Quarter Review

Project Website: andrewhlu.com/spl

Problem

Drivers spend too much time in parking lots trying to find an open space. Many parking lots only have per-floor capacity indicators, and existing solutions are prohibitively expensive.

What if we could utilize low-cost sensors and a companion application to navigate drivers to empty parking spots faster, at a low cost to facility owners?

Smart Parking Lot Overview

The goal is to design a smart parking lot that will direct drivers to the nearest open parking space on campus in an efficient, accurate and clean manner.

We accomplish this using:

- Small, inexpensive parking lot sensors with long-distance and low-power transmission
- Modern, open-source, and cloud-based software solutions
- Easy-to-use mobile interfaces

Roles

SPL

Andrew Lu
Gateway Application
Web Application Frontend and Backend

Luyao Han
Sensor Firmware
PCB Design
Wireless Charging

Finn Linderman
Wireless Communication
Power Management

Jun Cho
LoRa Communication
The Things Network Integration

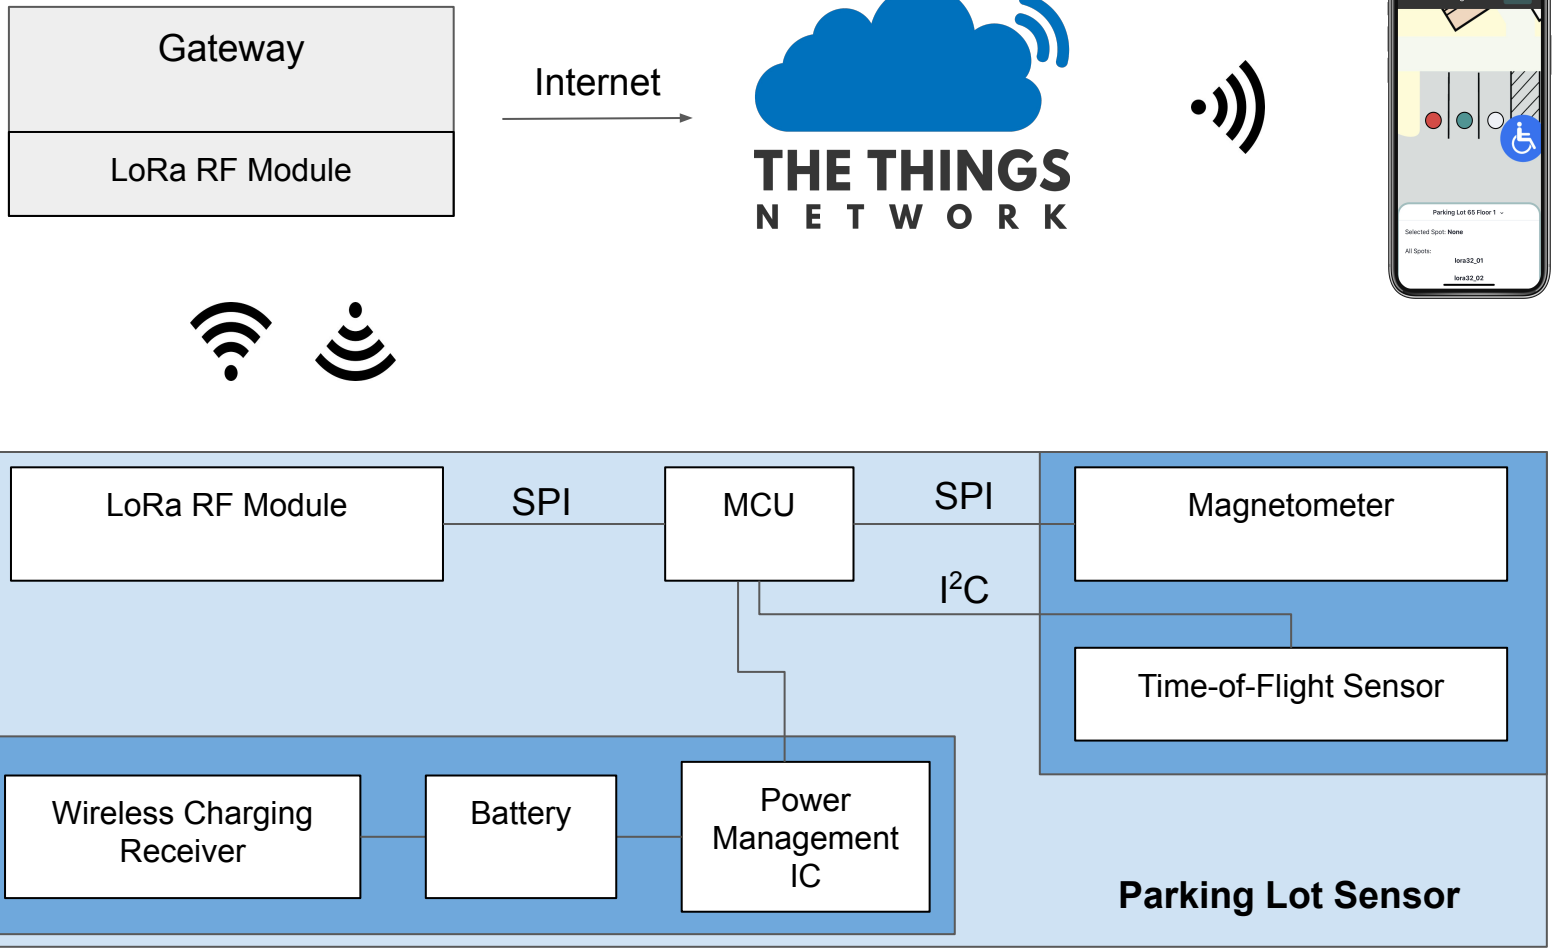
Gateway
LoRa RF Module
Internet
THE THINGS
NETWORK
Smart Parking Lot
Login
Parking Lot 65 Floor 1
Selected Spot: None
All Spots:
lora32_01
lora32_02
LoRa RF Module
SPI
MCU
SPI
Magnetometer
I2C
Time-of-Flight Sensor
Wireless Charging Receiver
Battery
Power Management IC
Parking Lot Sensor

Hardware Progress

Hardware Design

- PCB layout
- Sensors
- 3D-Printed Case

Function Verification

- Time-of-Flight (Lidar) Sensor
- Magnetometer
- Wireless Charging

Challenges

- LoRa Communication

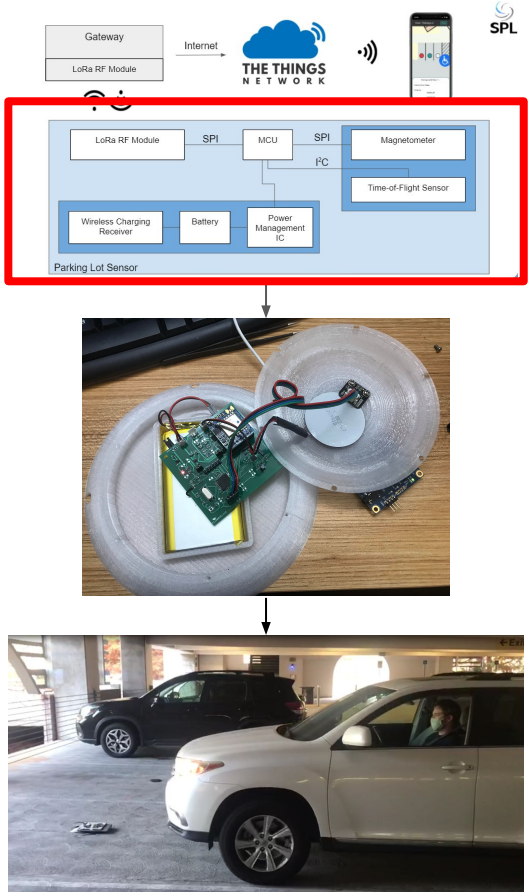

Idea

Hardware Implementation

Application Scene Testing

Hardware Explosion View

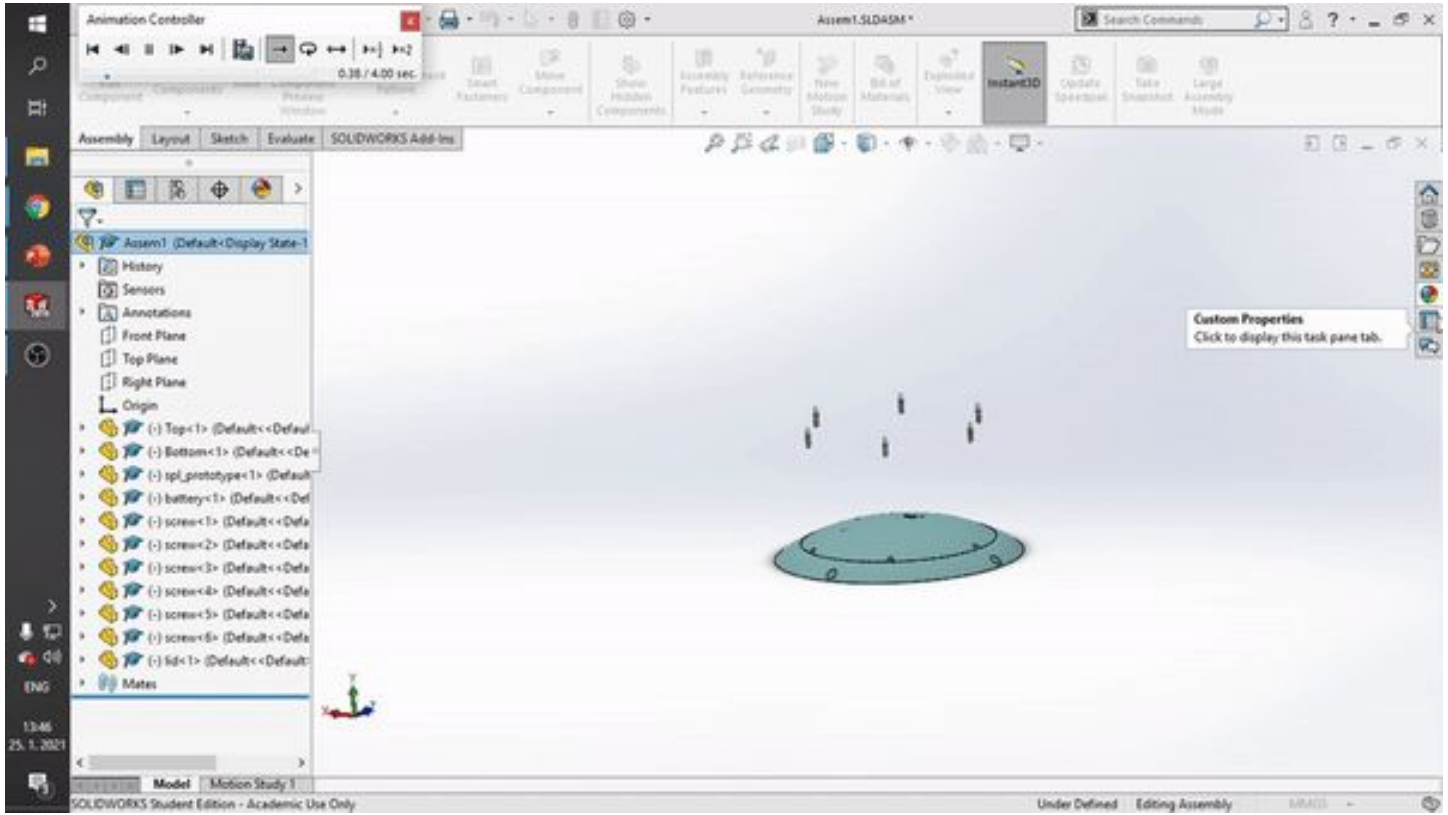

Case Design

PCB Assembly

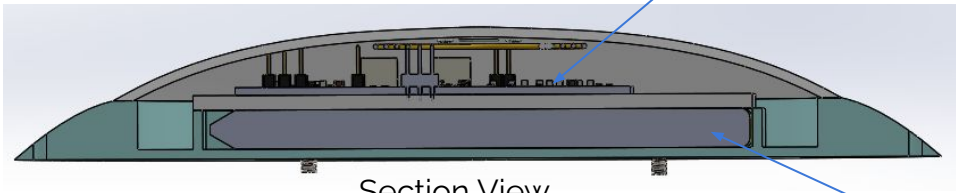

Section View

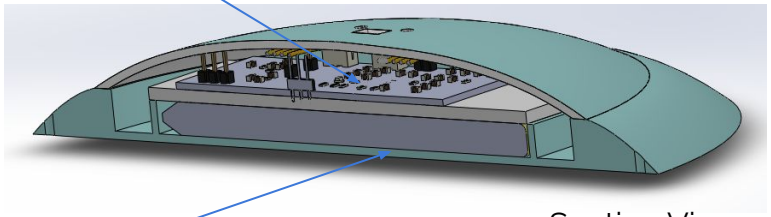

Section View

battery

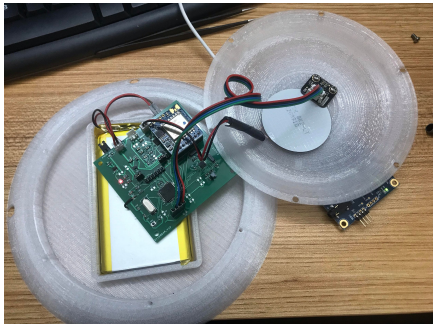

Physical Assembly



Application Scene

Schematics

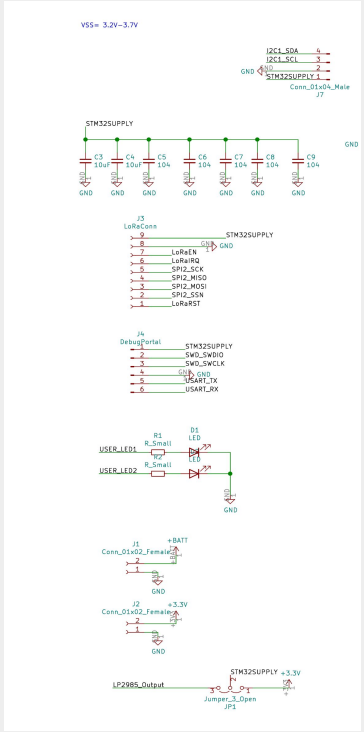

Connectors/Filtering

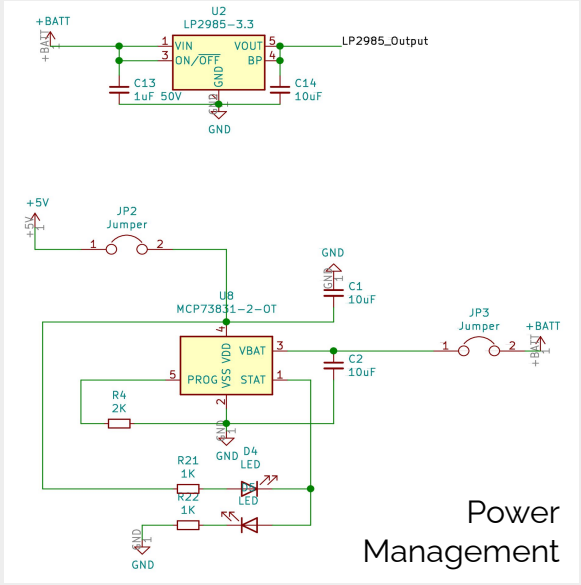

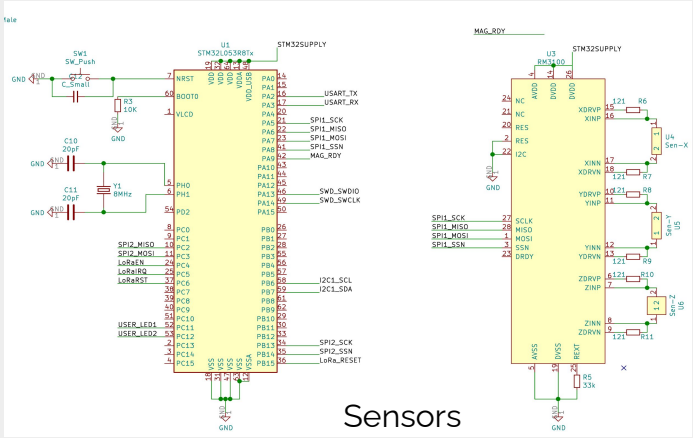

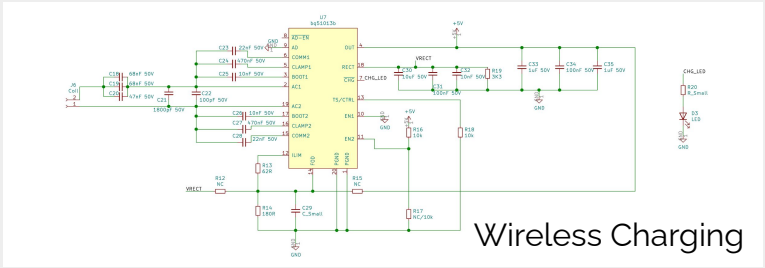

Project Website: andrewhlu.com/spl

PCB Assembly

- Designed with Kicad
- 60mm x 60 mm
- Estimated Power Consumption: 22 mA peak
- Will be Refined to 4-layer

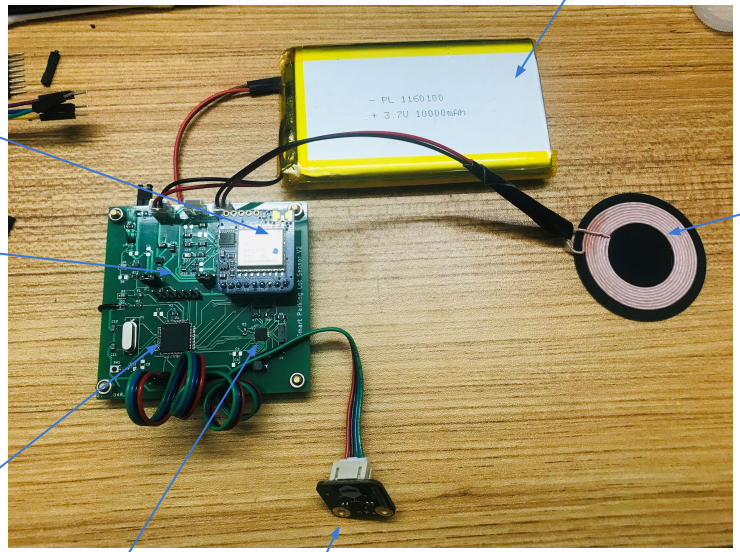

Assembled Top View

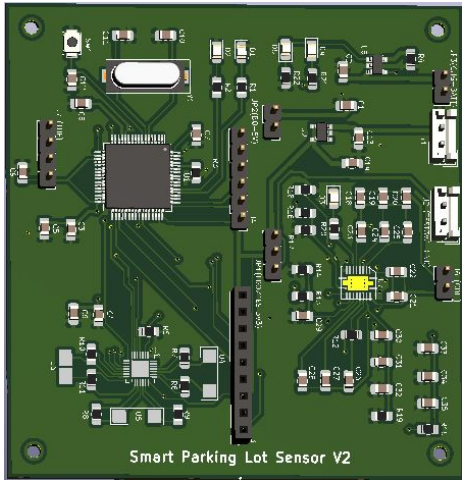

Kicad - 3D View

Wireless Charging

Charging

- Domed shaped unit attached to top of sensor unit

Estimates

- 5 years ~= 45000 hours
- Peak Power Consumption - 22 mA
- Charging - 4 hour

Advantages

- Sensors still operable when charging
- Maintenance WPC v1.2

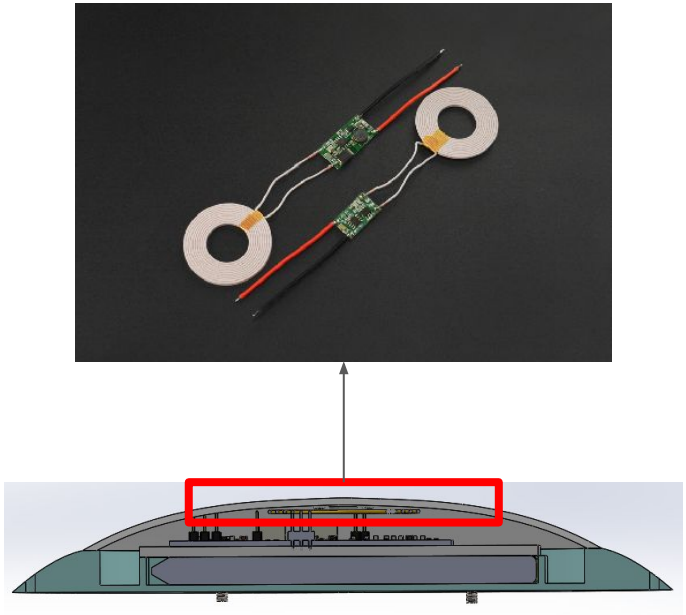

Section View Charging Coil

Wireless Charging Demo

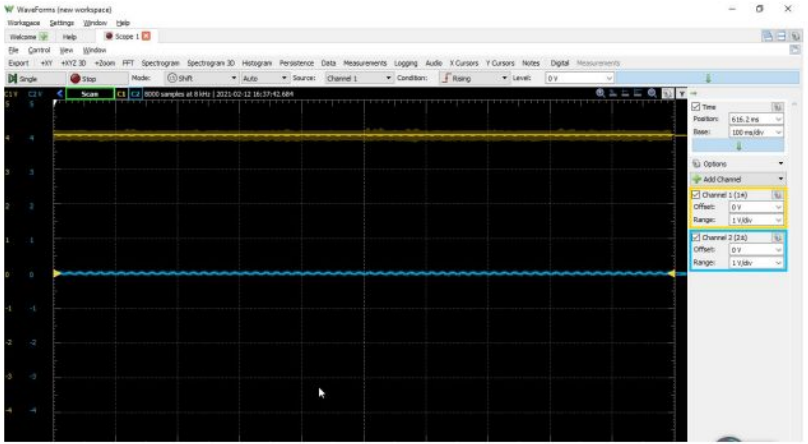

Charging Voltage: 4.2V

Firmware Design Block Diagram

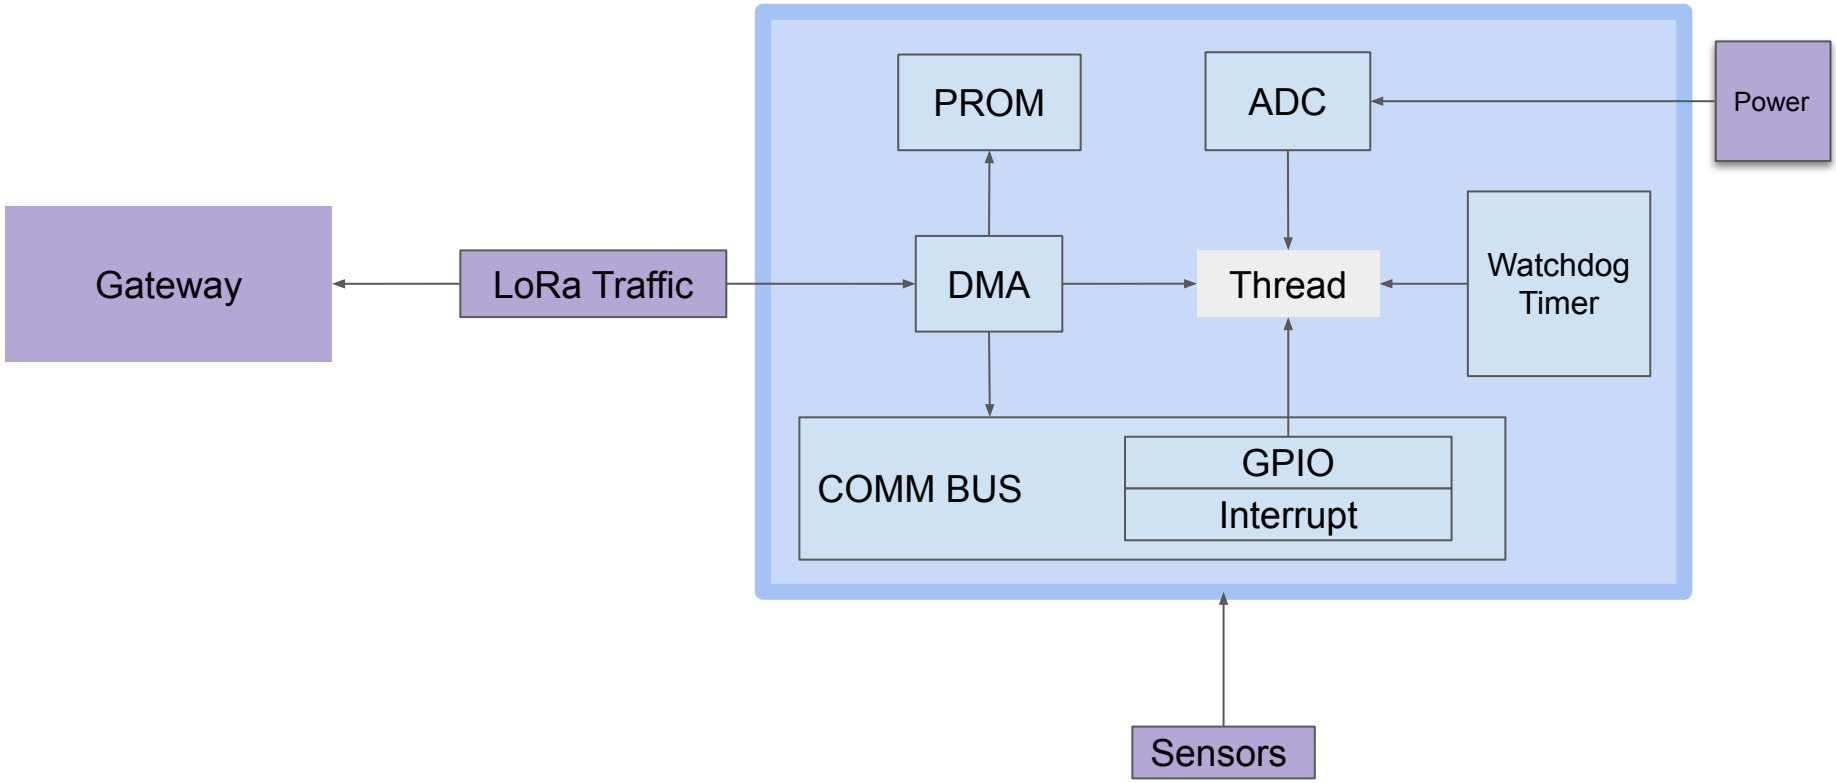

LoRa/LoRaWAN

Long Range Wide Area Network

- Long range (2 km up to several hundred km)
- Trades off having low bandwidth for long range and low power consumption
- Chirp Spread Spectrum Modulation
    - Similar to Frequency Shift Keying

LoRa vs. LoRaWAN

- LoRa = physical layer
- LoRaWAN = network stack
- LoRa can be used on its own as a communication protocol

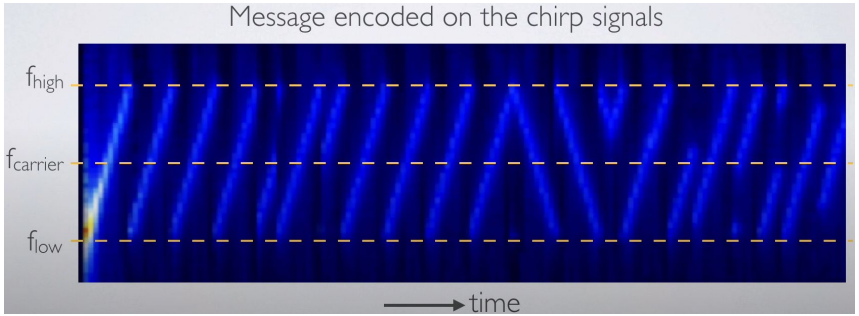

LoRaWAN Testing

STM32 I-NUCLEO-LRWAN1

- 860 MHz to 1020 MHz frequency range
- 14 dBm to 20 dBm transmission power
- -137 dBm receiver sensitivity
- 2.0V to 3.6V voltage range

Heltec ESP32 LoRa 32 (V2)

- 868 MHz to 915 MHz frequency range
- 15.5 dBm to 19.5 dBm transmission power
- -139 dBm receiver sensitivity
- 3.3V to 7V voltage range



Dev Boards for Testing

LoRaWAN Testing

Range Testing

- Tested connectivity across two interconnected parking structures
- Lost connection at about 250m (~820 ft) lateral distance through 5 floors

Multiple device Testing

- Simultaneous message sending through same channel
- Different channel receiver bandwidth testing

Effective Range

Gateway

The Things Industries TTIG-915 LoRaWAN Gateway

- 8-channel Omnidirectional Gateway
- +27 dBm transmit power
- Supports US 915 MHz Frequency Band
- Internet Connectivity using WiFi
- Officially Supported by *The Things Network*

Tested with LoRa development modules and *Raspberry Pi*

The Things Network

- A free and open-source service for hosting LoRaWAN devices and gateways
- Scalable, secure, used by over 136,000 developers
- Provides API endpoints for retrieving device data packets using JSON
- Historical data from *The Things Network* will also be cached in a MongoDb database

UI / Software Frameworks

- Starting with mobile-optimized web application, which will then be ported over to a native mobile application
- Frontend built using React and Chakra UI
- Backend built using Next JS
- Initial prototype implementing API routes to *The Things Network* completed and functional for current LoRa nodes

Progress - Software

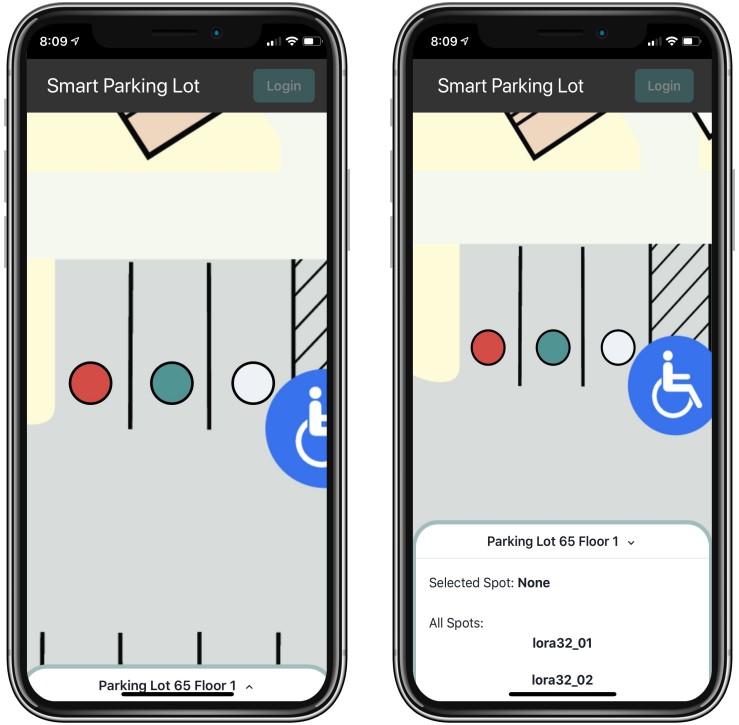

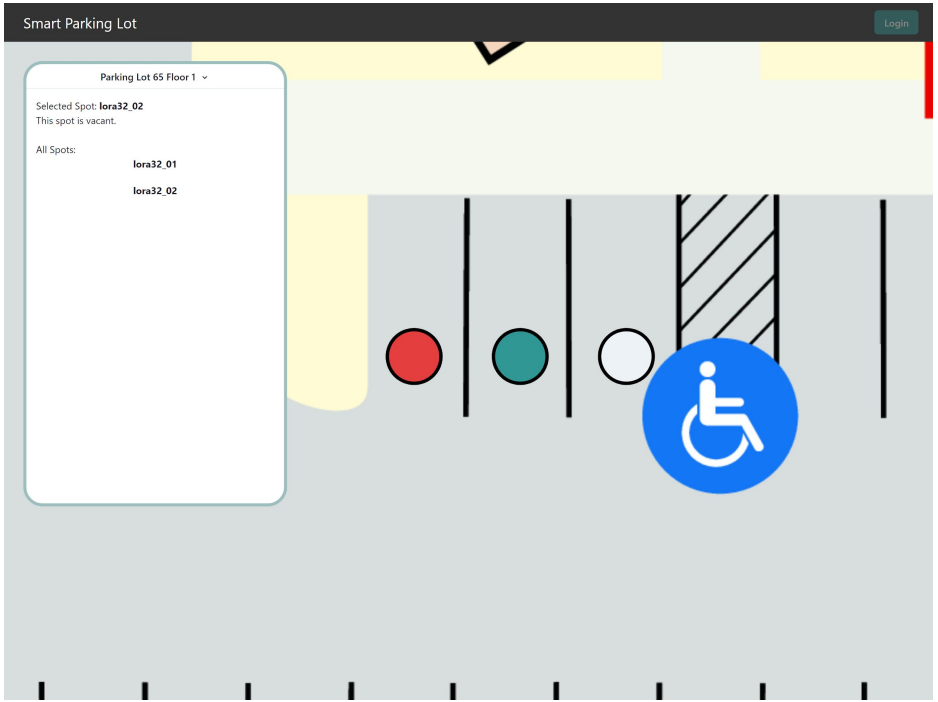

Schedule: Spring Quarter

Winter Quarter, Week 10 to Spring Quarter, Week 1

- **Debug LoRaWan Firmware**
- **Finish Web App, start testing**
- **Field Test with the Assembled Unit**
- **Start on final version of PCB**

Spring Quarter, Week 2-4

- **Finish Testing for Web Application**
- **Transfer Web App into Android / iOS Application**

Spring Quarter, Week 5-7

- **Final Testing for Complete Solution**

Thank you!

Questions?

Acknowledgements

Professor **Yogananda Isukapalli**

Teaching Assistants **Boning Dong, Trenton Rochelle**