



ADXL335 Analog G Sensor (if GY-61 is not installed)

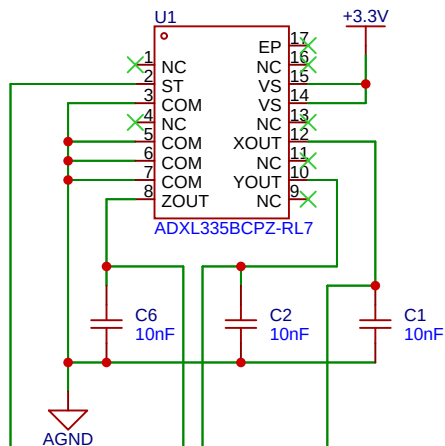


5V and 3.3V LDO Regulators

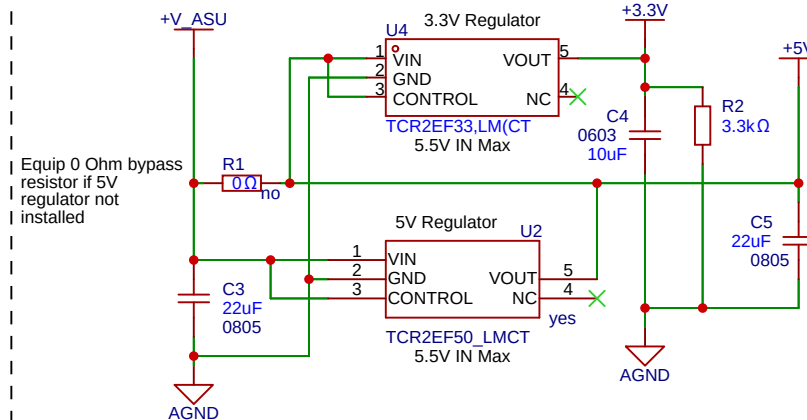


ASU is connected using either RJ-45 (optional) or direct soldered wire at this same connector footprint or with the Testing Connections below. Other end connects to SPU with either an 8 pin mini-DIN connector.


RJ-45(Optional) and solder point

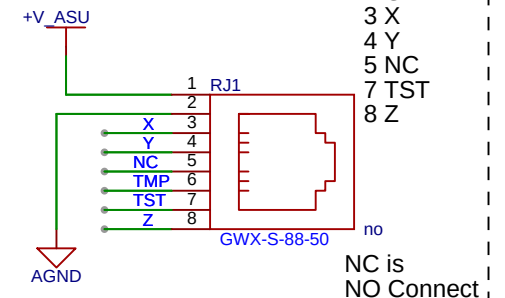

Accelerometer / Testing Connections

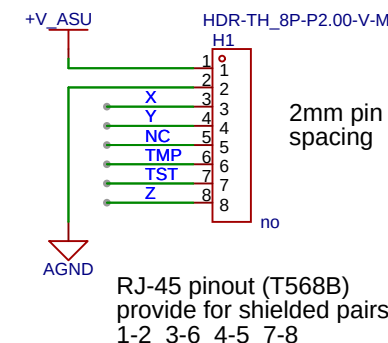


GY-61 Module (option)




Used if U1 not equipped. Y axis is same orientation.

Voltage follower configuration OP-AMP provides low impedance to drive cable length.

Cable Drivers

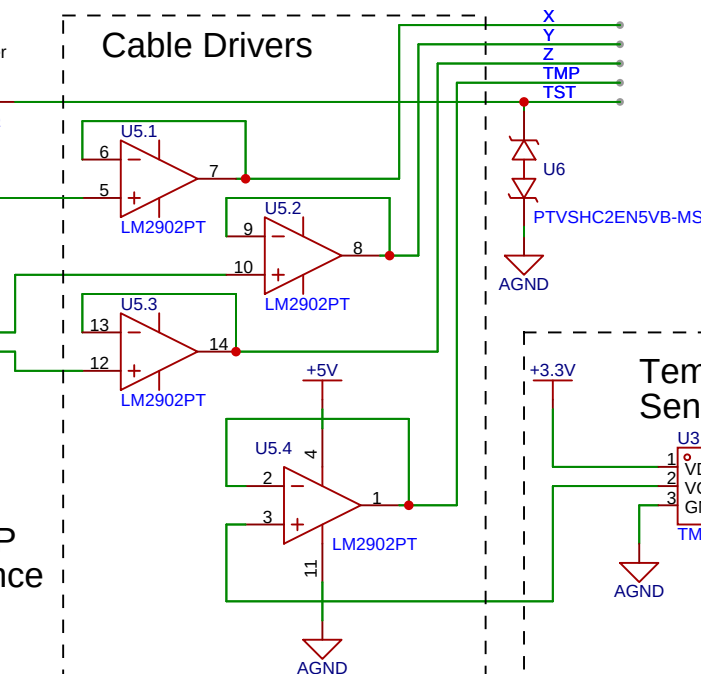

Temperature Sensor

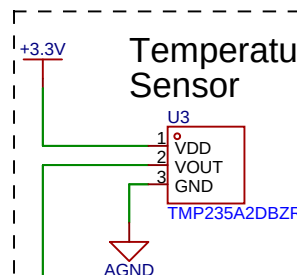

NOTE

- static discharge protection on ADXL335 TST line only.
- temperature sensor allows monitoring for temperature extremes if this unit will be mounted permanently in an engine compartment.
- temperature limitation is ADXL chip (-40C to +85C Operating Temperature)

Schematic

Accel Sensing Unit

Update Date 2024-08-31

Create Date 2024-04-02

Part Number

Page

ASU Schematic

Drawn

A.Ferrara

Reviewed

Vcheck Propeller Balancer

VER

SIZE

PAGE

1

OF

1

EasyEDA

V1.0

A

Lycosaurus