



AUX USB POWER

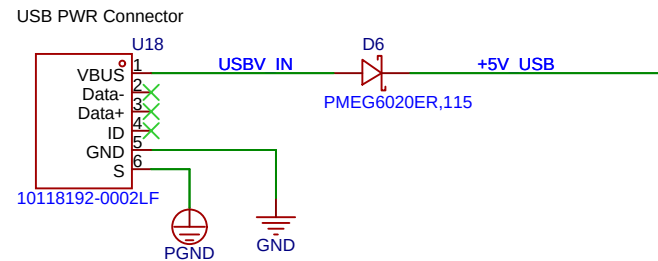

For internal battery application
5V to 8V

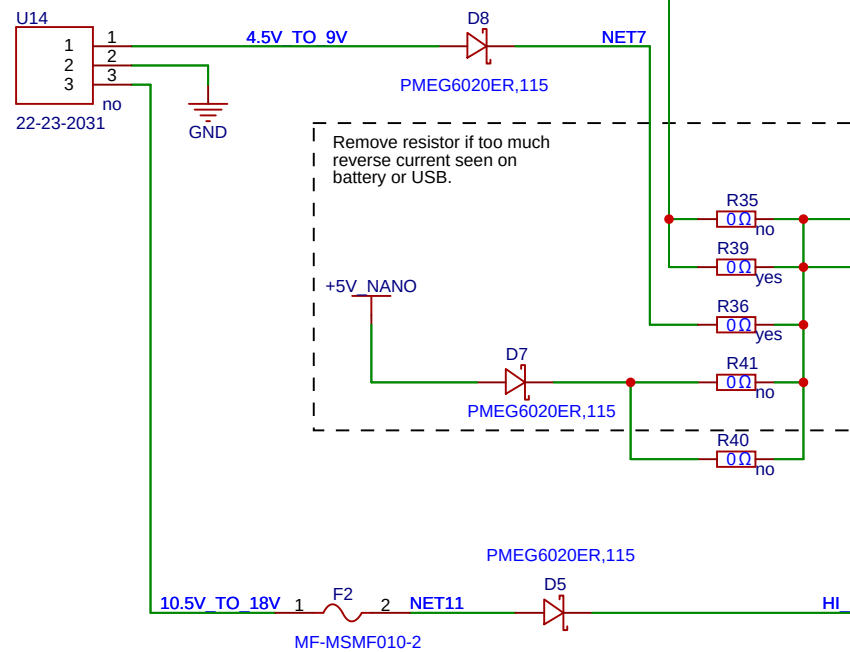

For Automotive power application
External 10.5V to 18V or for internal
HV battery application e.g. 2x9V Battery
in series.

POWER OPTIONS
4xAA Batt in series
1x9V Batt
2x9V Batt
10.5V - 15V External/automotive
5V USB


COMMENTS:

- "no" next to component (bottom left) means it is not in BOM
- resistors are typically 0603 except for most 0 Ohm which are 0805 for easier handling during configuration and testing
- small value capacitors are typically 0603; larger value capacitors (22uF) are 0805

WARNING

Do NOT recommend a laptop to power via USB connector as the laptop can be damaged due to the USB powering off on these ports when entering sleep mode. Laptop may be susceptible to reverse currents (from this device's battery or external supply). Schottky diodes should help mitigate this issue, however some reverse leakage current will always be present.




Symbol for switching
power supply module/pcb
(optional).

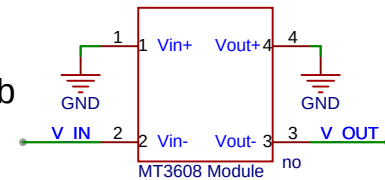

WARNING:


Disconnect output when first adjusting or
testing DC to DC converter output voltage.

Latching Power Switch

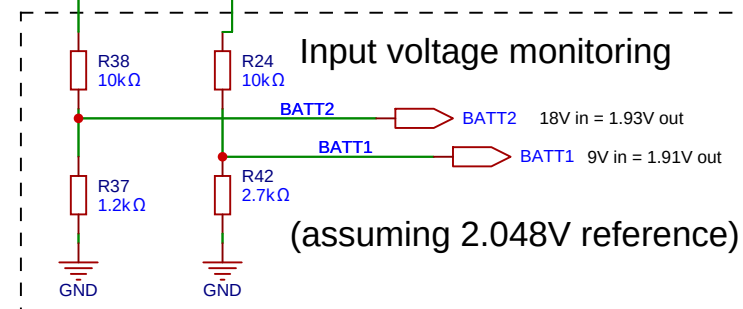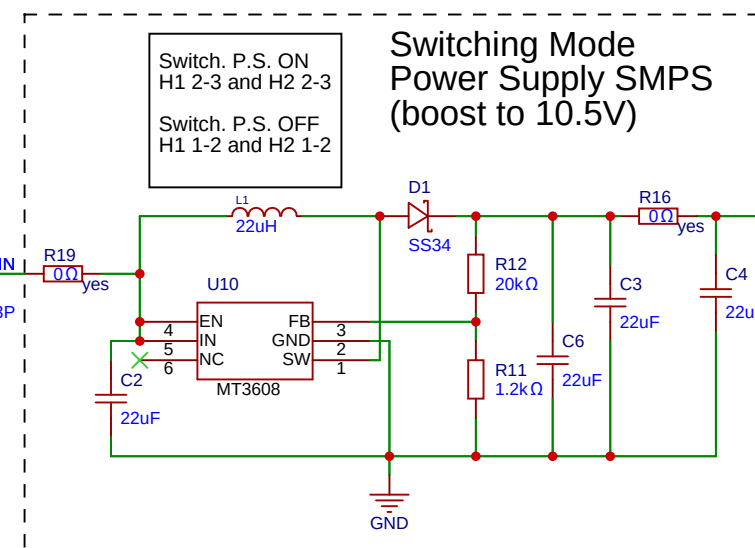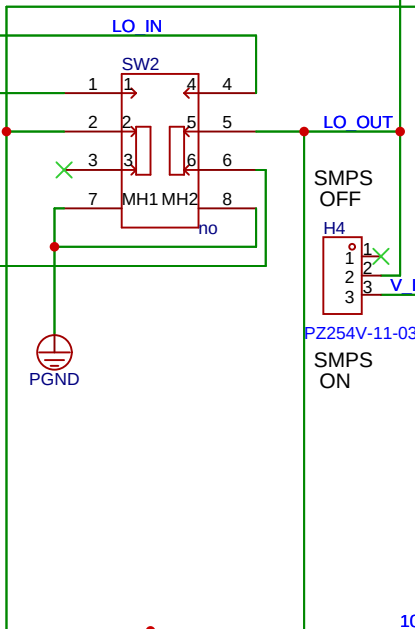


Voltage Regulators have
protection diodes

+5V Regulator for
other rotation detecting
sensors, as well as for
direct 5V to ASU.

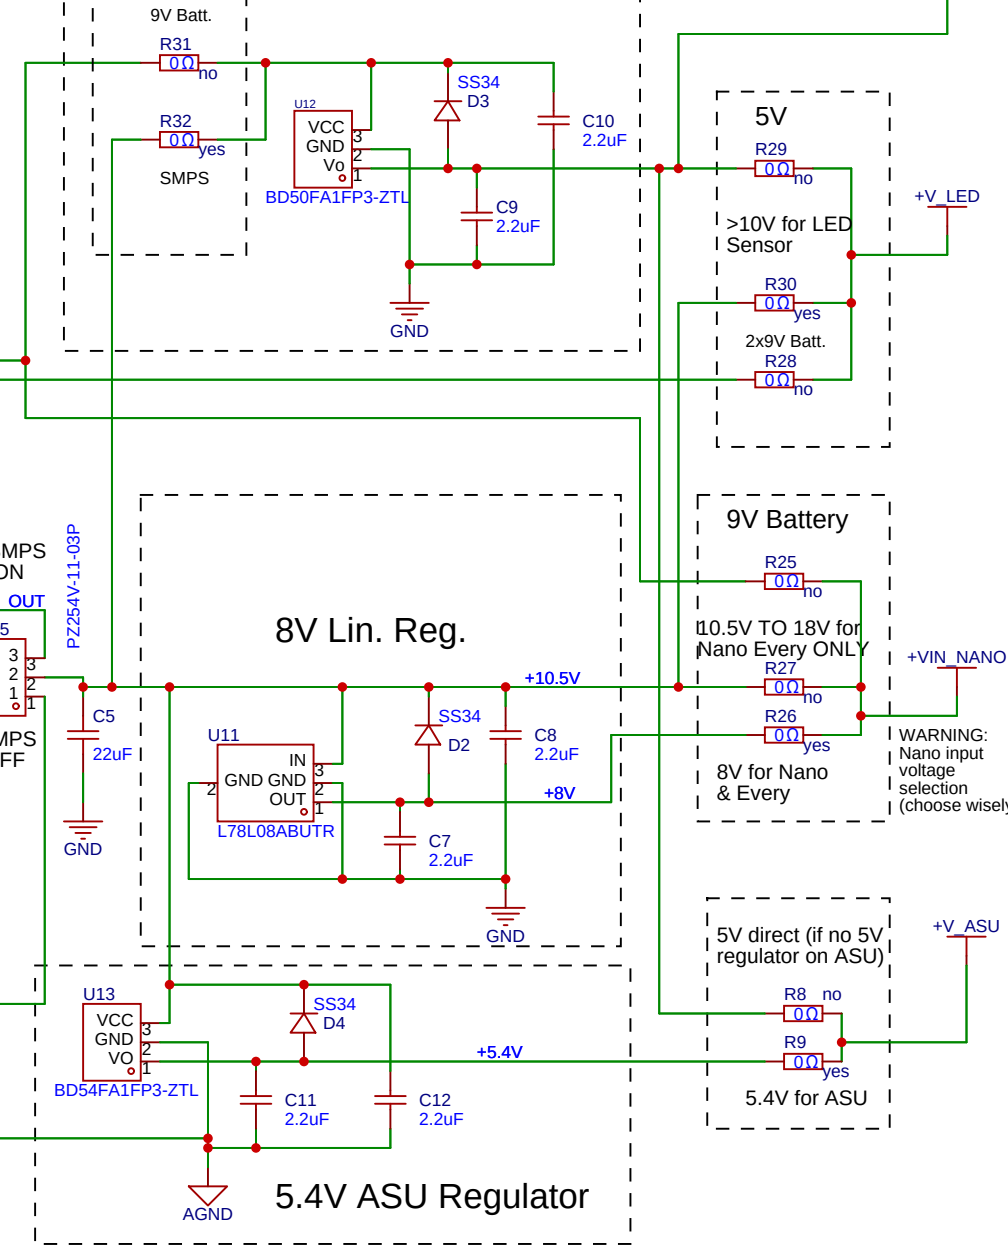

8V Lin. Reg.

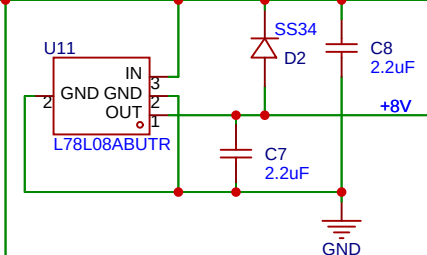

5.4V ASU Regulator

- * +8V Reg. mainly to offload (weak) reg. on Nano board
- * +5.4V Reg. to provide low noise voltage to ASU / cables
- * +5V Reg. for optional LCD power, as well as ASU if not using +5.4V reg.

Schematic	Signal Processing Unit			Update Date	2024-08-31
				Create Date	2024-04-02
Page	Power Supply			Part Number	JLCPCB-002
Drawn	A.Ferrara	Vcheck Propeller Balancer			
Reviewed					
		VER	SIZE	PAGE	1 OF 2
		V1.0	A4	Lycosaurus	