
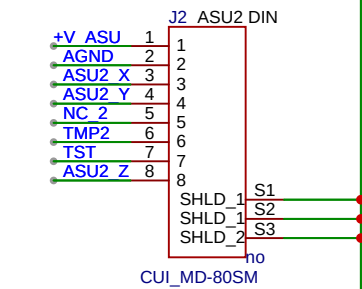
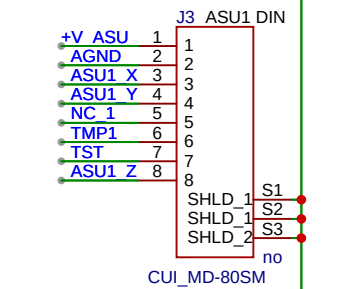
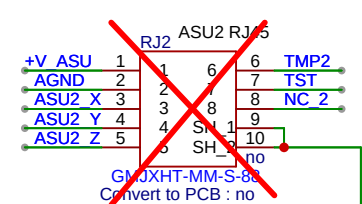


~~RJ-45 and Mini-DIN~~
(signals from ASU, ~~dual footprints~~)


Sensor 1

Sensor 2

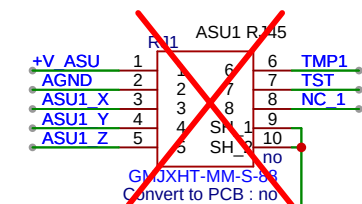


Test Connectors
(2mm pin spacing)

RJ-45 Pinout	Mini-DIN Pinout
1 +V_ASU	1 +V_ASU
2 GNDA	2 GNDA
3 X	3 X
4 Y	4 Y
5 NC	5 NC
6 TMP	6 TMP
7 TST	7 TST
8 Z	8 Z



NOTE
- ESD protection on some I/O,
however one must still observe good ESD
protocol when handling cables
or devices.

Test Connector



NOTE: +VLED = 10.5V to 16V
(optional 5V for other sensors)

DIN LED

Mini-DIN LED



DIN / Mini-DIN
(from LED Sensor)

- 1 bn +V_LED
- 2 bu GND
- 3 wh_1
- 4 bk_1
- 5 wh_2



- 1 bn +V_LED
- 2 bu GND
- 3 wh_1
- 4 bk_1
- 5 wh_2

DIN

Mini DIN

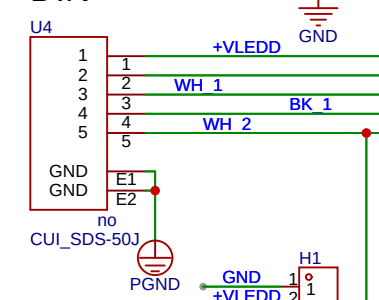




Test Connector

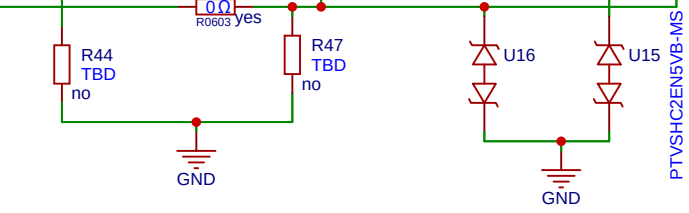


Acceleration Sensor
and Axis Selector

Termination
and Filters




Connector for Arduino
(nano, or nano-every)

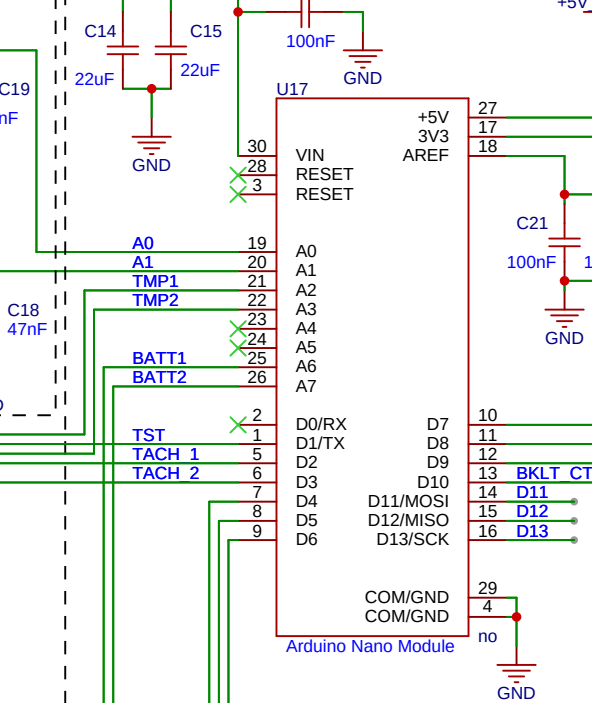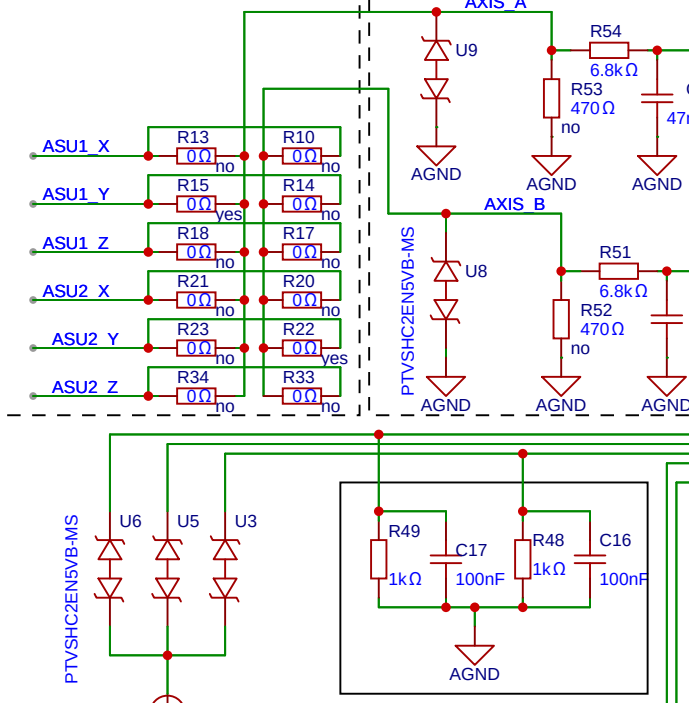

2.048V Reference Voltage can be
replaced by other ADC reference
chip, or 3.3V from Arduino.

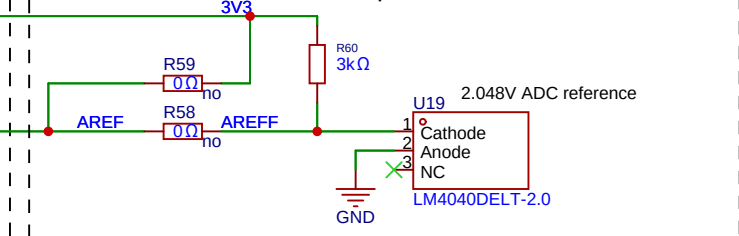

ADC external Reference Voltage

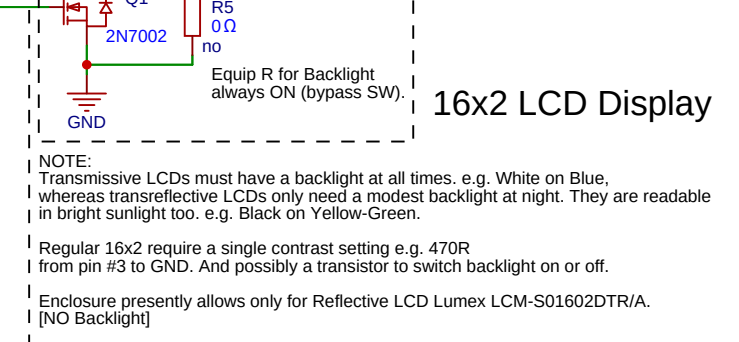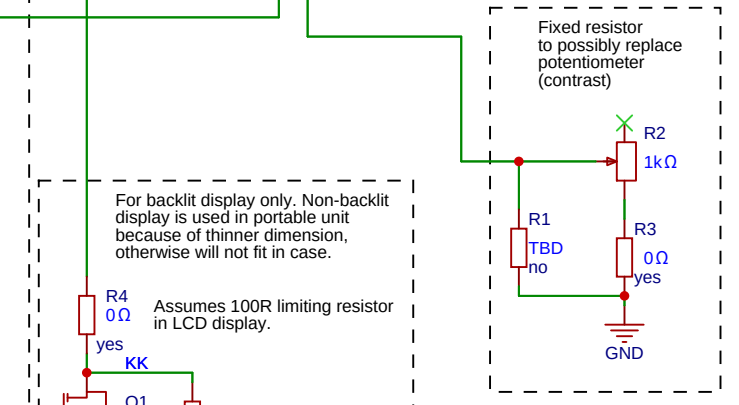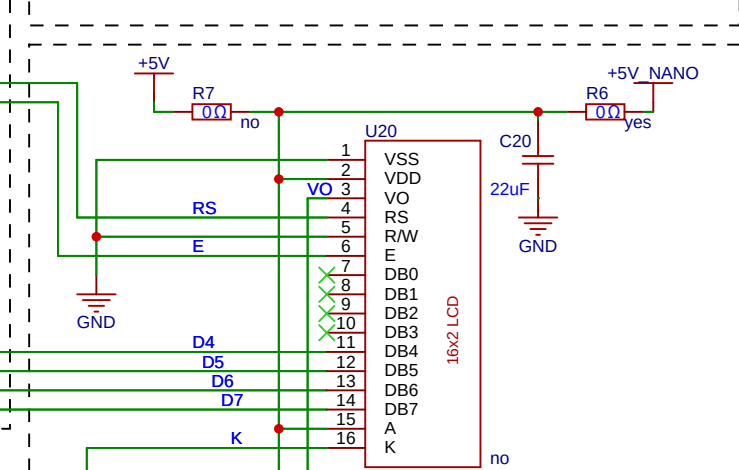

NOTE:
Transmissive LCDs must have a backlight at all times. e.g. White on Blue,
whereas transreflective LCDs only need a modest backlight at night. They are readable
in bright sunlight too. e.g. Black on Yellow-Green.
Regular 16x2 require a single contrast setting e.g. 470R
from pin #3 to GND. And possibly a transistor to switch backlight on or off.
Enclosure presently allows only for Reflective LCD Lumex LCM-S01602DTR/A.
[NO Backlight]

16x2 LCD Display

Schematic	Signal Processing Unit		Update Date	2024-08-31
	Processing and I/O		Create Date	2024-04-02
			Part Number	
Page	Vcheck Propeller Balancer			
Drawn	A.Ferrara			
Reviewed				
EasyEDA		VER	SIZE	PAGE 2 OF 2
		V1.0	A4	Lycosaurus