TRANSITION ALTITUDE 5000
AREA MNM ALT (x100) 35

ACC	134.430	SCOTTISH CONTROL
TWR	121.705	MANCHESTER DELIVERY

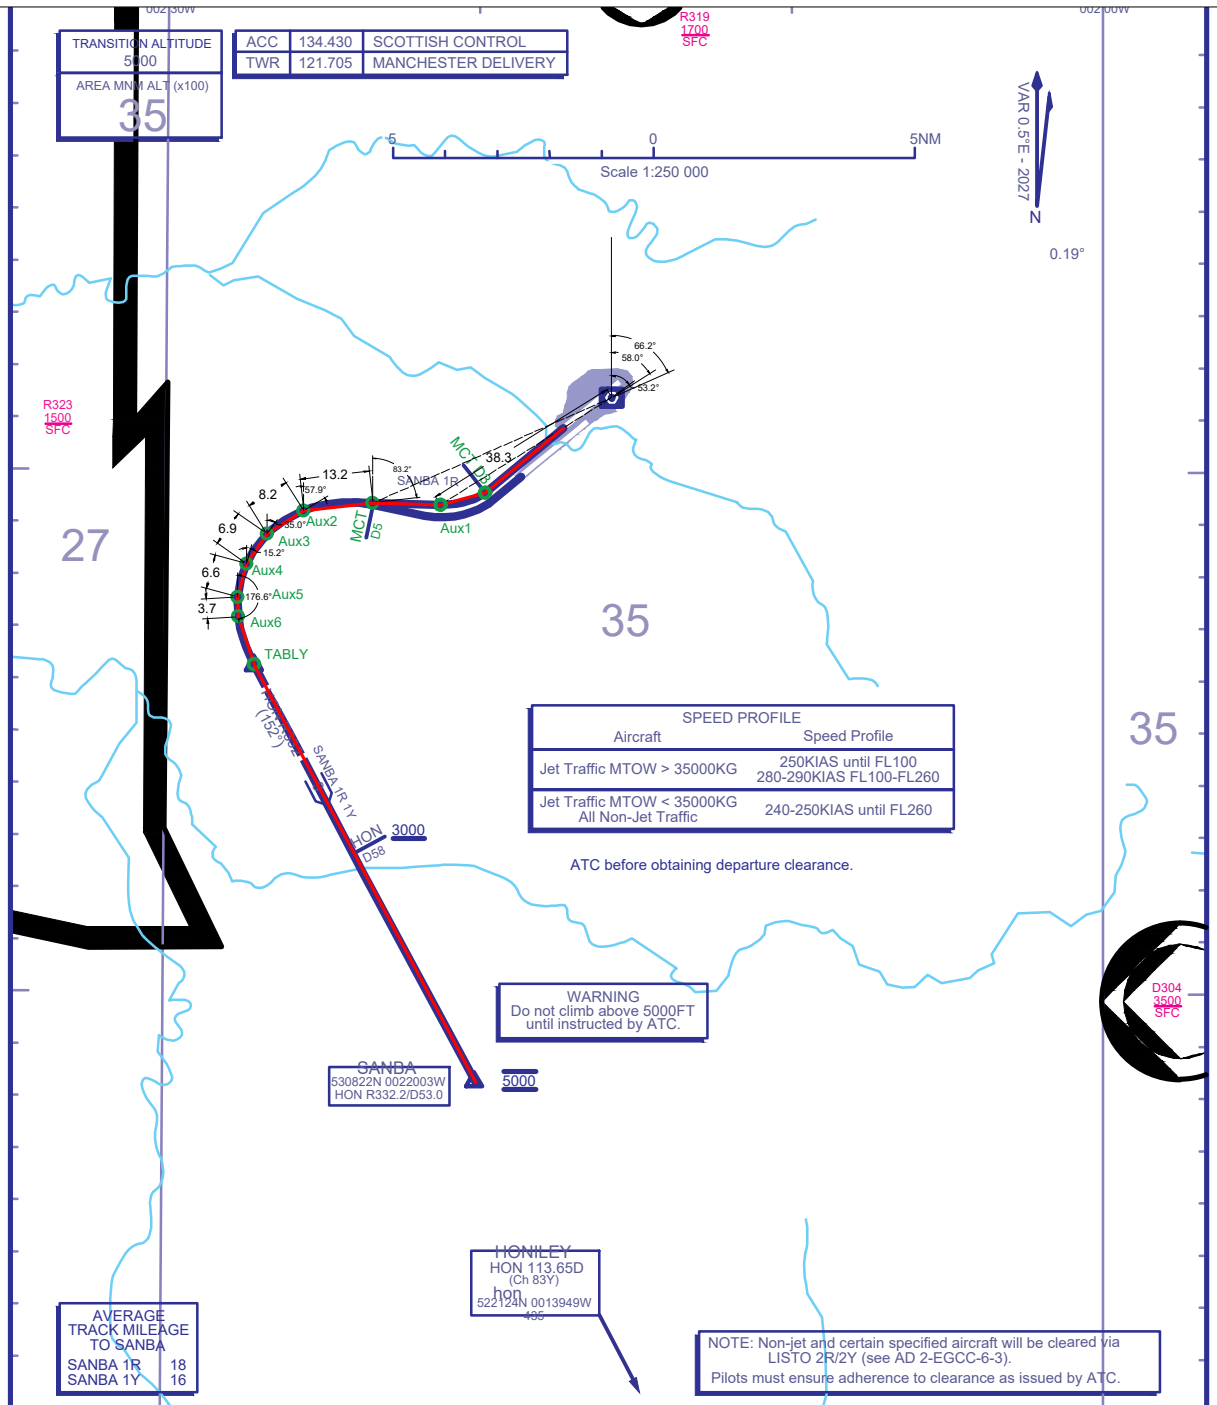

SPEED PROFILE	
Aircraft	Speed Profile
Jet Traffic MTOW > 35000KG	250KIAS until FL100 280-290KIAS FL100-FL260
Jet Traffic MTOW < 35000KG All Non-Jet Traffic	240-250KIAS until FL260

ATC before obtaining departure clearance.

WARNING
Do not climb above 5000FT until instructed by ATC.

AVERAGE TRACK MILEAGE TO SANBA	
SANBA 1R	18
SANBA 1Y	16

NOTE: Non-jet and certain specified aircraft will be cleared via LISTO 2R/2Y (see AD 2-EGCC-6-3).
Pilots must ensure adherence to clearance as issued by ATC.

SANBA 1R RWY 23R	Climb straight ahead. At MCT D3 turn right onto track 272°. At MCT D5 turn left to TABLY to intercept HON VOR R332 to SANBA. Cross HON D58 (MCT D10) at 3000 or above. Cross SANBA (HON D53) at 5000.	N859
SANBA 1Y RWY 23L	Climb straight ahead. At MCT D3.2 turn right onto track 282°. At MCT D5 turn left to TABLY to intercept HON VOR R332 to SANBA. Cross HON D58 (MCT D10) at 3000 or above. Cross SANBA (HON D53) at 5000.	N859

5300N 5300N

GENERAL INFORMATION
1 Close in obstacles exist for departures from all runways, see Aerodrome Obstacle Chart and EGCC AD 2.10 Aerodrome Obstacles.
2 SIDs reflect Noise Preferential Routeings. See EGCC AD 2.21 for Noise Abatement Procedures.
3 Callsign for RTF frequency used when instructed after take-off 'Scottish Control'. On first contact advise callsign/SID designator current altitude and cleared altitude.
4 Maximum 250KIAS below FL100 unless otherwise authorised.
5 Speed Profile applies to all aircraft following this SID unless cancelled by ATC.
6 Expect first CPDLC Data Link Authority to be EGTT.

002 30W 002 00W

CHANGE (8/26): PROCEDURE RNAV SUBSTITUTION ONLY.