INTERNATIONAL STANDARD

ISO
7933

Second edition
2004-08-15

Ergonomics of the thermal environment — Analytical determination and interpretation of heat stress using calculation of the predicted heat strain

Ergonomie des ambiances thermiques — Détermination analytique et interprétation de la contrainte thermique fondées sur le calcul de l'astreinte thermique prévisible

<div style="border:1px solid">

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

</div>

Contents

Page

© ISO 2004 – All rights reserved   iii

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 7933 was prepared by Technical Committee ISO/TC 159, *Ergonomics*, Subcommittee SC 5, *Ergonomics of the physical environment*.

This second edition cancels and replaces the first edition (ISO 7933:1989), which was based on the Required Sweat Rate index. In order to avoid any confusion and, as extensive modifications are brought to the prediction model, the name of the index has been changed to Predicted Heat Strain (PHS).

Introduction

Other International Standards of this series describe how the parameters influencing the human thermoregulation in a given environment must be estimated or quantified. Others specify how these parameters must be integrated in order to predict the degree of discomfort or the health risk in these environments. The present document was prepared to standardize the methods that occupational health specialists should use to approach a given problem and progressively collect the information needed to control or prevent the problem.

The method of computation and interpretation of thermal balance is based on the latest scientific information. Future improvements concerning the calculation of the different terms of the heat balance equation, or its interpretation, will be taken into account when they become available. In its present form, this method of assessment is not applicable to cases where special protective clothing (reflective clothing, active cooling and ventilation, impermeable, with personal protective equipment) is worn.

In addition, occupational health specialists are responsible for evaluating the risk encountered by a given individual, taking into consideration his specific characteristics that might differ from those of a standard subject. ISO 9886 describes how physiological parameters must be used to monitor the physiological behaviour of a particular subject and ISO 12894 describes how medical supervision must be organized.

Ergonomics of the thermal environment — Analytical determination and interpretation of heat stress using calculation of the predicted heat strain

1   Scope

This International Standard specifies a method for the analytical evaluation and interpretation of the thermal stress experienced by a subject in a hot environment. It describes a method for predicting the sweat rate and the internal core temperature that the human body will develop in response to the working conditions.

The various terms used in this prediction model, and in particular in the heat balance, show the influence of the different physical parameters of the environment on the thermal stress experienced by the subject. In this way, this International Standard makes it possible to determine which parameter or group of parameters should be modified, and to what extent, in order to reduce the risk of physiological strains.

The main objectives of this International Standard are the following:

a)   the evaluation of the thermal stress in conditions likely to lead to excessive core temperature increase or water loss for the standard subject;

b)   the determination of exposure times with which the physiological strain is acceptable (no physical damage is to be expected). In the context of this prediction mode, these exposure times are called "maximum allowable exposure times".

This International Standard does not predict the physiological response of individual subjects, but only considers standard subjects in good health and fit for the work they perform. It is therefore intended to be used by ergonomists, industrial hygienists, etc., to evaluate working conditions.

2   Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 7726, *Ergonomics of the thermal environment — Instruments for measuring physical quantities*

ISO 8996, *Ergonomics of the thermal environment — Determination of metabolic rate*

ISO 9886, *Ergonomics — Evaluation of thermal strain by physiological measurements*

ISO 9920, *Ergonomics of the thermal environment — Estimation of the thermal insulation and evaporative resistance of a clothing ensemble*

3   Symbols

For the purposes of this document, the symbols and abbreviated terms, designated below as "symbols" with their units, are in accordance with ISO 7726.

However, additional symbols are used to for the presentation of the Predicted Heat Strain index.

A complete list of symbols is presented in Table 1.

Table 1 — Symbols and units

Symbol	Term	Unit
−	code = 1 if walking speed entered, 0 otherwise	−
−	code = 1 if walking direction entered, 0 otherwise	−
α	fraction of the body mass at the skin temperature	dimensionless
α_i	skin-core weighting at time t_i	dimensionless
α_{i-1}	skin-core weighting at time t_{i-1}	dimensionless
ε	emissivity	dimensionless
θ	angle between walking direction and wind direction	degrees
A_{Du}	DuBois body surface area	square metre
A_p	fraction of the body surface covered by the reflective clothing	dimensionless
A_r	effective radiating area of a body	dimensionless
C	convective heat flow	watts per square metre
c_e	water latent heat of vaporization	joules per kilogram
$C_{orr,cl}$	correction for the dynamic total dry thermal insulation at or above 0,6 clo	dimensionless
$C_{orr,la}$	correction for the dynamic total dry thermal insulation at 0 clo	dimensionless
$C_{orr,tot}$	correction for the dynamic clothing insulation as a function of the actual clothing	dimensionless
$C_{orr,E}$	correction for the dynamic permeability index	dimensionless
c_p	specific heat of dry air at constant pressure	joules per kilogram of dry air kelvin
C_{res}	respiratory convective heat flow	watts per square metre
c_{sp}	specific heat of the body	watts per square meter per kelvin
D_{lim}	maximum allowable exposure time	minutes
$D_{lim\ tre}$	maximum allowable exposure time for heat storage	minutes
$D_{limloss50}$	maximum allowable exposure time for water loss, mean subject	minutes
$D_{limloss95}$	maximum allowable exposure time for water loss, 95 % of the working population	minutes
D_{max}	maximum water loss	grams
D_{max50}	maximum water loss to protect a mean subject	grams
D_{max95}	maximum water loss to protect 95 % of the working population	grams
DRINK	1 if workers can drink freely, 0 otherwise	dimensionless

Symbol	Term	Unit
dS_i	body heat storage during the last time increment	watts per square metre
dS_{eq}	body heat storage rate for increase of core temperature associated with the metabolic rate	watts per square meter
E	evaporative heat flow at the skin	watts per square metre
E_{max}	maximum evaporative heat flow at the skin surface	watts per square metre
E_p	predicted evaporative heat flow	watts per square metre
E_{req}	required evaporative heat flow	watts per square metre
E_{res}	respiratory evaporative heat flow	watts per square metre
f_{cl}	clothing area factor	dimensionless
$F_{cl,R}$	reduction factor for radiation heat exchange due to wearing clothes	dimensionless
F_r	emissivity of the reflective clothing	dimensionless
H_b	body height	meters
h_{cdyn}	dynamic convective heat transfer coefficient	watts per square metre kelvin
h_r	radiative heat transfer coefficient	watts per square metre kelvin
$I_{a\,st}$	static boundary layer thermal insulation	square meters kelvin per watt
$I_{cl\,st}$	static clothing insulation	square meters kelvin per watt
I_{cl}	clothing insulation	clo
$I_{tot\,st}$	total static clothing insulation	square meters kelvin per watt
$I_{a\,dyn}$	dynamic boundary layer thermal insulation	square meters kelvin per watt
$I_{cl\,dyn}$	dynamic clothing insulation	square meters kelvin per watt
$I_{tot\,dyn}$	total dynamic clothing insulation	square meters kelvin per watt
i_{mst}	static moisture permeability index	dimensionless
i_{mdyn}	dynamic moisture permeability index	dimensionless
$incr$	time increment from time t_{i-1} to time t_i	minutes
k_{Sw}	fraction k of predicted sweat rate	dimensionless
K	conductive heat flow	watts per square metre
M	metabolic rate	watts per square meter
p_a	water vapour partial pressure	kilopascals
$p_{sk,s}$	saturated water vapour pressure at skin temperature	kilopascals
R	radiative heat flow	watts per square metre
r_{req}	required evaporative efficiency of sweating	dimensionless
R_{tdyn}	dynamic total evaporative resistance of clothing and boundary air layer	square metres kilopascals per watt
S	body heat storage rate	watts per square metre
S_{eq}	body heat storage for increase of core temperature associated with the metabolic rate	watts per square metre
Sw_{max}	maximum sweat rate	watts per square metre
Sw_p	predicted sweat rate	watts per square metre
$Sw_{p,i}$	predicted sweat rate at time t_i	watts per square metre

© ISO 2004 – All rights reserved

Symbol	Term	Unit
$Sw_{p,i-1}$	predicted sweat rate at time t_{i-1}	watts per square metre
Sw_{req}	required sweat rate	watts per square metre
t	time	minutes
t_a	air temperature	degrees celsius
t_{cl}	clothing surface temperature	degrees celsius
t_{cr}	core temperature	degrees celsius
$t_{cr,eqm}$	steady state value of core temperature as a function of the metabolic rate	degrees celsius
$t_{cr,eq}$	core temperature as a function of the metabolic rate	degrees celsius
$t_{cr,eq\ i}$	core temperature as a function of the metabolic rate at time t_i	degrees celsius
$t_{cr,eq\ i-1}$	core temperature as a function of the metabolic rate at time t_{i-1}	degrees celsius
$t_{cr,i}$	core temperature at time t_i	degrees celsius
$t_{cr,i-1}$	core temperature at time t_{i-1}	degrees celsius
t_{ex}	expired air temperature	degrees celsius
t_r	mean radiant temperature	degrees celsius
t_{re}	rectal temperature	degrees celsius
$t_{re,\ max}$	maximum acceptable rectal temperature	degrees celsius
$t_{re,i}$	rectal temperature at time t_i	degrees celsius
$t_{re,i-1}$	rectal temperature at time t_{i-1}	degrees celsius
$t_{sk,eq}$	steady state mean skin temperature	degrees celsius
$t_{sk,eq\ nu}$	steady state mean skin temperature for nude subjects	degrees celsius
$t_{sk,eq\ cl}$	steady state mean skin temperature for clothed subjects	degrees celsius
$t_{sk,i}$	mean skin temperature at time t_i	degrees celsius
$t_{sk,i-1}$	mean skin temperature at time t_{i-1}	degrees celsius
V	respiratory ventilation rate	litres per minute
v_a	air velocity	metres per second
v_{ar}	relative air velocity	metres per second
v_w	walking speed	metres per second
w	skin wettedness	dimensionless
W	effective mechanical power	watts per square metre
W_a	humidity ratio	kilograms of water per kilogram of dry air
W_b	body mass	kilograms
W_{ex}	humidity ratio for the expired air	kilograms of water per kilogram of dry air
w_{max}	maximum skin wettedness	dimensionless
w_p	predicted skin wettedness	dimensionless
w_{req}	required skin wettedness	dimensionless

4 Principles of the method of evaluation

The method of evaluation and interpretation calculates the thermal balance of the body from

a) the parameters of the thermal environment:

   — air temperature, t_a;

   — mean radiant temperature, t_r;

   — partial vapour pressure, p_a;

   — air velocity, v_a;

(These parameters are estimated or measured according to ISO 7726.)

b) the mean characteristics of the subjects exposed to this working situation:

   — the metabolic rate, M, estimated on the basis of ISO 8996;

   — the clothing thermal characteristics estimated on the basis of ISO 9920.

Clause 5 describes the principles of the calculation of the different heat exchanges occurring in the thermal balance equation, as well as those of the sweat loss necessary for the maintenance of the thermal equilibrium of the body. The mathematical expressions for these calculations are given in Annex A.

Clause 6 describes the method of interpretation which leads to the determination of the predicted sweat rate, the predicted rectal temperature, and the maximum allowable exposure times and work-rest regimens to achieve the predicted sweat rate. This determination is based on two criteria: maximum body core temperature increase and maximum body water loss. Maximum values for these criteria are given in Annex B.

The precision with which the predicted sweat rate and the exposure times are estimated is a function of the model (i.e. of the expressions proposed in Annex A) and the maximum values, which are adopted. It is also a function of the accuracy of estimation and measurement of the physical parameters and of the precision with which the metabolic rate and the thermal insulation of the clothing are estimated.

5 Main steps of the calculation

5.1 General heat balance equation

5.1.1 General

The thermal balance equation of the body may be written as:

$$M - W = C_{res} + E_{res} + K + C + R + E + S \tag{1}$$

This equation expresses that the internal heat production of the body, which corresponds to the metabolic rate (M) minus the effective mechanical power (W), is balanced by the heat exchanges in the respiratory tract by convection (C_{res}) and evaporation (E_{res}), as well as by the heat exchanges on the skin by conduction (K), convection (C), radiation (R), and evaporation (E), and by the eventual balance, heat storage (S), accumulating in the body.

The different terms of Equation (1) are successively reviewed in terms of the principles of calculation (detailed expressions are shown in Annex A).

5.1.2   Metabolic rate, M

The estimation or measurement of the metabolic rate is described in ISO 8996.

Indications for the evaluation of the metabolic rate are given in Annex C.

5.1.3   Effective mechanical power, W

In most industrial situations, the effective mechanical power is small and can be neglected.

5.1.4   Heat flow by respiratory convection, C_{res}

The heat flow by respiratory convection may be expressed, in principle, by the equation

$$C_{res} = 0{,}072 \, c_p \times V \times \frac{t_{ex} - t_a}{A_{Du}} \tag{2}$$

5.1.5   Heat flow by respiratory evaporation, E_{res}

The heat flow by respiratory evaporation may be expressed, in principle, by the equation

$$E_{res} = 0{,}072 \, c_e \times V \times \frac{W_{ex} - W_a}{A_{Du}} \tag{3}$$

5.1.6   Heat flow by conduction: K

As this International Standard deals with the risk of whole-body dehydration and hyperthermia, the heat flow by thermal conduction at the body surfaces in contact with solid objects may be quantitatively assimilated to the heat losses by convection and radiation, which would occur if these surfaces were not in contact with any solid body. In this way, the heat flow by conduction is not directly taken into account.

ISO 13732-1 deals specifically with the risks of pain and burns when parts of the body contact hot surfaces.

5.1.7   Heat flow by convection at the skin surface, C

The heat flow by convection at the skin surface may be expressed by the equation

$$C = h_{cdyn} \times f_{cl} \times (t_{sk} - t_a) \tag{4}$$

where the dynamic convective heat transfer coefficient between the clothing and the outside air, h_{cdyn}, takes into account the clothing characteristics, the movements of the subject and the air movements.

Annex D provides some indications for the evaluation of the clothing thermal characteristics.

5.1.8   Heat flow by radiation at the surface of the skin, R

The heat flow by radiation may be expressed by the equation

$$R = h_r \times f_{cl} \times (t_{sk} - t_r) \tag{5}$$

where the radiative heat transfer coefficient between the clothing and the outside air, h_r, takes into account the clothing characteristics, the movements of the subject and the air movements.

5.1.9 Heat flow by evaporation at the skin surface, E

The maximum evaporative heat flow at the skin surface, E_{max}, is that which can be achieved in the hypothetical case of the skin being completely wetted. In these conditions

$$E_{max} = \frac{p_{sk,s} - p_a}{R_{tdyn}}$$ (6)

where the total evaporative resistance of the limiting layer of air and clothing, $R_{tdyn,}$ takes into account the clothing characteristics, the movements of the subject and the air movements.

In the case of a partially wetted skin, the evaporation heat flow, E, in watts per square metre, is given by

$$E = w \times E_{max}$$ (7)

5.1.10 Heat storage for increase of core temperature associated with the metabolic rate, dS_{eq}

Even in neutral environment, the core temperature rises towards a steady state value $t_{cr,eq}$ as a function of the metabolic rate relative to the individual's maximal aerobic power.

The core temperature reaches this steady state temperature exponentially with time. The heat storage associated with this increase, $dS_{eq,}$ does not contribute to the onset of sweating and must therefore be deducted from the heat balance equation.

5.1.11 Heat storage, S

The heat storage of the body is given by the algebraic sum of the heat flows defined previously.

5.2 Calculation of the required evaporative heat flow, the required skin wettedness and the required sweat rate

Taking into account the hypotheses made concerning the heat flow by conduction, the general heat balance Equation (1) can be written as

$$E + S = M - W - C_{res} - E_{res} - C - R$$ (8)

The required evaporative heat flow, E_{req}, is the evaporation heat flow required for the maintenance of the thermal equilibrium of the body and, therefore, for the heat storage to be equal to zero. It is given by

$$E_{req} = M - W - C_{res} - E_{res} - C - R - dS_{eq}$$ (9)

The required skin wettedness, w_{req}, is the ratio between the required evaporative heat flow and the maximum evaporative heat flow at the skin surface:

$$w_{req} = \frac{E_{req}}{E_{max}}$$ (10)

The calculation of the required sweat rate is made on the basis of the required evaporative heat flow, but taking account of the fraction of sweat that trickles away because of the large variations in local skin wettedness. The required sweat rate is given by

$$Sw_{req} = \frac{E_{req}}{r_{req}}$$ (11)

NOTE   The sweat rate in watts per square meter represents the equivalent in heat of the sweat rate expressed in grams of sweat per square metre of skin surface and per hour. 1 W·m^{-2} corresponds to a flow of 1,47 g·m^{-2} h^{-1} or 2,67 g·h^{-1} for a standard subject (1,8 m^2 of body surface).

6 Interpretation of required sweat rate

6.1 Basis of the method of interpretation

The interpretation of the values calculated by the recommended analytical method is based on two stress criteria:

— the maximum skin wettedness, w_{max}

— the maximum sweat rate: Sw_{max}

and on two strain criteria

— the maximum rectal temperature: $t_{re, max}$

— the maximum water loss: D_{max}.

The required sweat rate, Sw_{req}, cannot exceed the maximum sweat rate, Sw_{max}, achievable by the subject. The required skin wettedness, w_{req}, cannot exceed the maximum skin wettedness, w_{max}, achievable by the subject. These two maximum values are a function of the acclimatization of the subject.

In the case of non-equilibrium of the thermal balance, the rectal temperature increase must be limited at a maximum value, $t_{re,max}$ such that the probability of any pathological effect is extremely limited.

Finally, whatever the thermal balance, the water loss should be restricted to a value, D_{max}, compatible with the maintenance of the hydromineral equilibrium of the body.

Annex B includes reference values for the stress criteria (w_{max} and Sw_{max}) and the strain criteria ($t_{re,max}$ and D_{max}). Different values are presented for acclimatized and non-acclimatized subjects, and according to the degree of protection that is desired [mean level or 95 % (alarm) level].

6.2 Analysis of the work situation

Heat exchanges are computed at time, t_i, from the body conditions existing at the previous computation time and as a function of the climatic and metabolic conditions prevailing during the time increment.

— The required evaporative heat flow (E_{req}), skin wettedness (w_{req}) and sweat rate (Sw_{req}) are first computed.

— Then the predicted evaporative heat flow (E_p), skin wettedness (w_p) and sweat rate (Sw_p) are computed, considering the limitations of the body (w_{max} and Sw_{max}) as well as the exponential response of the sweating system.

— The rate of heat storage is estimated by the difference between the required and predicted evaporation heat flow. This heat contributes to increase or decrease the skin and body temperatures. These two parameters are then estimated, as well as the rectal temperature.

— From these values, the heat exchanges during the next time increment are computed.

The evolutions of Sw_p and t_{re} are in this way iteratively computed.

This procedure makes possible to take into account not only constant working conditions, but also any conditions with climatic parameters or work load characteristics varying in time.

6.3   Determination of maximum allowable exposure time (D_{lim})

The maximum allowable exposure time, D_{lim}, is reached when either the rectal temperature or the cumulated water loss reaches the corresponding maximum values.

In work situations for which

⎯ either the maximum evaporative heat flow at the skin surface, E_{max}, is negative, leading to condensation of water vapour on the skin,

⎯ or the estimated allowable exposure time is less than 30 min, so that the phenomenon of sweating onset plays a major role in the estimation of the evaporation loss of the subject,

special precautionary measures need to be taken and direct and individual physiological supervision of the workers is particularly necessary. The conditions for carrying out this surveillance and the measuring techniques to be used are described in ISO 9886.

6.4   Organization of work in the heat

This International Standard makes it possible to compare different ways of organizing work and scheduling rest periods if it is necessary.

A computer programme in Quick Basic is given in Annex E. It allows for the calculation and the interpretation of any combination of sequences where the metabolic rate, the clothing thermal characteristics and climatic parameters are known.

Annex F provides some data (input data and results) to be used for the validation of any computer programme developed on the basis of the model presented in Annex A.

 9

Annex A
(normative)

Data necessary for the computation of thermal balance

A.1 Ranges of validity

The numerical values and the equations given in this annex conform to the present state of knowledge. Some of them are likely to be amended in the light of increased knowledge.

The algorithms described in this annex were validated on a database including 747 lab experiments and 366 field experiments, from 8 research institutions. Table A.1 gives the ranges of conditions for which the Predicted Heat Strain (PHS) model can be considered to be validated. When one or more parameters are outside this range, it is recommended to use the present model with care and to bring special attention to the people exposed.

Table A.1 — Ranges of validity of the PHS model

Parameters		Minimum	Maximum
t_a	°C	15	50
p_a	kPa	0	4,5
$t_r - t_a$	°C	0	60
v_a	ms^{-1}	0	3
M	W	100	450
I_{cl}	clo	0,1	1,0

A.2 Determination of the heat flow by respiratory convection, C_{res}

The heat flow by respiratory convection can be estimated by the following empirical expression:

$$C_{res} = 0,001\,52\,M\,(28,56 + 0,885\,t_a + 0,641\,p_a)$$ (A.1)

A.3 Determination of the heat flow by respiratory evaporation, E_{res}

The heat flow by respiratory evaporation can be estimated by the following empirical expression:

$$E_{res} = 0,001\,27\,M\,(59,34 + 0,53\,t_a - 11,63\,p_a)$$ (A.2)

A.4 Determination of the steady state mean skin temperature

In climatic conditions for which this International Standard is applicable, the steady state mean skin temperature can be estimated as a function of the parameters of the working situation, using the following empirical expressions.

For nude subjects ($I_{cl} \leqslant 0,2$) **For clothed subjects** ($I_{cl} \geqslant 0,6$)

$t_{sk,eq\,nu} = 7,19$	$+\ 0,064\ t_a$	$t_{sk,eq\,cl} = 12,17$	$+\ 0,020\ t_a$
	$+\ 0,061\ t_r$		$+\ 0,044\ t_r$
	$-\ 0,348\ v_a$		$-\ 0,253\ v_a$
	$+\ 0,198\ p_a$		$+\ 0,194\ p_a$
	$+\ 0,000\ M$		$+\ 0,005\ 346\ M$
	$+\ 0,616\ t_{re}$		$+\ 0,512\ 74\ t_{re}$

For I_{cl} values between 0,2 and 0,6, the steady state skin temperature is extrapolated between these two values using:

$$t_{sk,eq} = t_{sk,eq\,nu} + 2,5 \times (t_{sk,eq\,cl} - t_{sk,eq\,nu}) \times (I_{cl} - 0,2) \tag{A.3}$$

A.5 Determination of the instantaneous value of skin temperature

The skin temperature $t_{sk,i}$ at time t_i can be estimated

— from the skin temperature $t_{sk,i-1}$ at time t_{i-1} one time increment earlier, and

— from the steady state skin temperature $t_{sk,eq}$ predicted from the conditions prevailing during the last time increment by the equations described in (A.4).

The time constant of the response of the skin temperature being equal to 3 min, the following equation is used.

$$t_{sk,i} = 0,716\ 5\ t_{sk,i-1} + 0,283\ 5\ t_{sk,eq} \tag{A.4}$$

A.6 Determination of the heat accumulation associated with the metabolic rate, S_{eq}

In a neutral environment, the core temperature increases with time during exercise, as a function of the metabolism rate relative to the individual's maximum aerobic power.

For an average subject, it can be assumed that this equilibrium core temperature increases as a function of the metabolic rate, according to the following expression:

$$t_{cr,eq} = 0,003\ 6\ (M - 55) + 36,8 \tag{A.5}$$

The core temperature reaches this equilibrium core temperature following a first order system with a time constant equal to 10 min:

$$t_{cr} = 36,8 + (t_{cr,eq} - 36,8) \times \left(1 - \exp\frac{-t}{10}\right) \tag{A.6}$$

This expression can be translated in the following

$$t_{cr,eq\,i} = t_{cr,eq\,i-1} \times k + t_{cr,eq} \times (1 - k) \tag{A.7}$$

where $\quad k = \exp\left(\dfrac{-incr}{10}\right)$

The heat storage associated with this increase is

$$dS_{eq} = c_{sp} \times (t_{cr,eq\ i} - t_{cr,eq\ i-1}) \times (1 - \alpha) \tag{A.8}$$

A.7 Determination of the static insulation characteristics of clothing

For a nude subject and in static conditions without movements either of the air or of the person, the sensible heat exchanges $(C + R)$ can be estimated by

$$C + R \ = \ \frac{t_{sk} - t_a}{I_{tot\ st}} \tag{A.9}$$

where the static heat resistance for nude subjects can be estimated equal to $0,111\ \text{m}^2 \cdot \text{K} \cdot \text{W}^{-1}$.

For a clothed subject, this static heat resistance, $I_{tot\ st,}$ can be estimated using

$$I_{tot\ st} = I_{cl\ st} + \frac{I_{a\ st}}{f_{cl}} \tag{A.10}$$

where the ratio of the subject's clothed to unclothed surface areas, f_{cl}, is given by

$$f_{cl} = 1 + 1,97\ I_{cl\ st} \tag{A.11}$$

A.8 Determination of the dynamic insulation characteristics of clothing

Activity and ventilation modify the insulation characteristics of the clothing and the adjacent air layer. Because both wind and movement reduce the insulation, it therefore needs to be corrected. The correction factor for the static clothing insulation and the external air layer insulation can be estimated with the following equations

$$I_{tot\ dyn} = C_{orr,tot} \times I_{tot\ st} \tag{A.12}$$

$$I_{a\ dyn} = C_{orr,la} \times I_{a\ st} \tag{A.13}$$

$$C_{orr,tot} = C_{orr,cl} = e^{(0,043\ -\ 0,398\,v_{ar}\ +\ 0,066\,v_{ar}^2\ -\ 0,378\,v_w\ +\ 0,094\,v_w^2)} \tag{A.14}$$

For $I_{cl} \geqslant 0,6$ clo for nude persons or the adjacent air layer, by

$$C_{orr,tot} = C_{orr,la} = e^{(-0,472\,v_{ar}\ +\ 0,047\,v_{ar}^2\ -\ 0,342\,v_w\ +\ 0,117\,v_w^2)} \tag{A.15}$$

and for 0 clo $\leqslant I_{cl} \leqslant 0,6$ clo, by

$$C_{orr,tot} \ = (0,6 - I_{cl})\,C_{orr,la} + I_{cl} \times C_{orr,cl} \tag{A.16}$$

with v_{ar} limited to 3 m·sec^{-1} and v_w limited to 1,5 m·sec^{-1}.

When the walking speed is undefined or the person is stationary, the value for v_w can be calculated as

$$v_w = 0,0052\ (M - 58) \qquad \text{with } v_w \leqslant 0,7 \text{ m} \cdot \text{s}^{-1} \tag{A.17}$$

Finally, $I_{cl\ dyn}$ can be derived as

$$I_{cl\ dyn} = I_{tot\ dyn} - \frac{I_{a\ dyn}}{f_{cl}} \tag{A.18}$$

A.9 Estimation of the heat exchanges through convection and radiation

The dry heat exchanges can be estimated using the following equations:

$$C + R = f_{cl} \times [h_{cdyn} \times (t_{cl} - t_a) + h_r \times (t_{cl} - t_r)]$$ (A.19)

which describes the heat exchanges between the clothing and the environment, and

$$C + R = \left(\frac{t_{sk} - t_{cl}}{I_{cl\,dyn}} \right)$$ (A.20)

which describes the heat exchanges between the skin and the clothing surface.

The dynamic convective heat exchange, h_{cdyn}, can be estimated as the greatest value of

$$2{,}38 \, |t_{sk} - t_a|^{0,25}$$ (A.21)

$$3{,}5 + 5{,}2 \, v_{ar}$$ (A.22)

$$8{,}7 \, v_{ar}^{0,6}$$ (A.23)

The radiative heat exchange, h_r, can be estimated using the equation

$$h_r = 5{,}67 \times 10^{-8} \varepsilon \times \frac{A_r}{A_{Du}} \times \frac{(t_{cl} + 273)^4 - (t_r + 273)^4}{t_{cl} - t_r}$$ (A.24)

The fraction of skin surface involved in heat exchange by radiation, $\frac{A_r}{A_{Du}}$, is equal to 0,67 for a crouching subject, 0,70 for a seated subject and 0,77 for a standing subject.

When reflective clothing is being worn, h_r must be corrected by a factor $F_{cl,R}$ given by

$$F_{cl,R} = (1 - A_p) \, 0{,}97 + A_p \times F_r$$ (A.25)

Both expressions computing $C + R$ must be solved iteratively in order to derive t_{cl}.

A.10 Estimation of the maximum evaporative heat flow at the skin surface, E_{max}

The maximum evaporative heat flow at the skin surface is given by

$$E_{max} = \frac{p_{sk,s} - p_a}{R_{tdyn}}$$ (A.26)

The evaporative resistance, R_{tdyn}, is estimated from the following equation:

$$R_{tdyn} = \frac{I_{tot\,dyn}}{\dfrac{i_{mdyn}}{16,7}}$$ (A.27)

where the dynamic clothing permeability index, i_{mdyn}, is equal to the static clothing permeability index i_{mst} corrected for the influence of air and body movement.

$$i_{mdyn} = i_{mst} \times C_{orr,\,E}$$ (A.28)

with

$$C_{\text{orr, E}} = 2{,}6\, C_{\text{orr,tot}}^2 - 6{,}5\, C_{\text{orr,tot}} + 4{,}9 \qquad\qquad (A.29)$$

In this expression, i_{mdyn} is limited to 0,9.

A.11 Determination of the predicted sweat rate (Sw_p) and predicted evaporative heat flow (E_p)

The flow chart in Figure A.1 shows how the evaluations are performed.

This flow chart requires the following explanations:

R1: when the required evaporative heat flow E_{req} is greater than the maximum evaporation rate, the skin is expected to be fully wetted: w_{req} greater than 1. w_{req} implies then the thickness of the water layer on the skin, rather than the equivalent fraction of the skin, which is covered with sweat. As the theoretical w_{req} is greater than 1, the evaporation efficiency is expected to become lower.

For $w_{\text{req}} \leqslant 1$, the efficiency is given by $\qquad r_{\text{req}} = \dfrac{1 - w_{\text{req}}^2}{2}$

For $w_{\text{req}} \geqslant 1$, it is given by $\qquad r_{\text{req}} = \dfrac{2 - w_{\text{req}}^2}{2}$

This value, however, is at the minimum 5 %. This is reached for a theoretical wettedness of 1,684.

R2: the sweat rate response can be described by a first order system with a time constant of 10 min. Therefore, the predicted sweat rate at time, t_i, ($Sw_{p,i}$) is equal to a fraction k_{Sw} of the predicted sweat rate at time (t_{i-1}) ($Sw_{p,i-1}$) one time increment earlier plus the fraction $(1 - k_{\text{Sw}})$ of the sweat rate required by the conditions prevailing during the last time increment (Sw_{req}), and k_{Sw} is given by.

$$k_{\text{Sw}} = \exp(-incr\,/\,10)$$

R3: as explained above, the required skin wettedness is allowed to be theoretically greater than 1 for the computation of the predicted sweat rate. As the evaporative heat loss is restricted to the surface of the water layer, that is, the surface of the body, the predicted skin wettedness cannot be greater than one. This occurs as soon as the predicted sweat rate is more than twice the maximum evaporation heat flow.

A.12 Evaluation of the rectal temperature

The heat storage during the last time increment at time, t_i, is given by

$$S = E_{\text{req}} - E_p + S_{\text{eq}} \qquad\qquad (A.30)$$

This heat storage leads to an increase in core temperature, taking into account the increase in skin temperature. The fraction of the body mass at the mean core temperature is given by

$$(1 - \alpha) = 0{,}7 + 0{,}09\,(t_{\text{cr}} - 36{,}8) \qquad\qquad (A.31)$$

This fraction is limited to

0,7 for $t_{cr} < 36{,}8\ °C$

0,9 for $t_{cr} > 39{,}0\ °C$

Figure A.2 illustrates the distribution of the temperature in the body at time (t_{i-1}) and time t_i. From this it can be computed that

$$t_{cr,i} = \frac{1}{1 - \dfrac{\alpha}{2}} \left[\frac{dS_i}{c_p\ W_b} + t_{cr,i-1} - \frac{t_{cr,i-1} - t_{sk,i-1}}{2}\ \alpha_{i-1} - t_{sk,i}\frac{\alpha_i}{2} \right] \tag{A.32}$$

The rectal temperature is estimated according to the following expression:

$$t_{re,i} = t_{re,i-1} + \frac{2\ t_{cr,i} - 1{,}962\ t_{re,i-1} - 1{,}31}{9} \tag{A.33}$$

$$E_{req} = M - C_{res} - E_{res} - C - R - dS_{eq}$$

N

| $E_{max} \leq 0$ | →Y→ | $E_{max} = 0$ | → | $Sw_{req} = Sw_{max}$ |

N

| $E_{req} \leq 0$ | →Y→ | $E_{req} = 0$ | → | $Sw_{req} = 0$ |

N

$$w_{req} = E_{req}/E_{max}$$

N

| $w_{req} \geq 1.7$ | →Y→ | $w_{req} \geq 1.7$ | → | $Sw_{req} = Sw_{max}$ |

N

| $r_{req} = (1 - w_{req}^2)/2$ | ←N← | $w_{req} > 1$ | →Y→ | $r_{req} = (1 - w_{req}^2)/2$ |

$$Sw_{req} = E_{req}/r_{req}$$

| $Sw_{req} > Sw_{max}$ | →Y→ | $Sw_{req} = Sw_{max}$ |

N

$$Sw_p = 0,904\ 8\ Sw_{p0} + 0,095\ 2\ Sw_{req}$$

N

| $Sw_p \leq 0$ | →Y→ | $Sw_p = 0,\ E_p = 0$ |

N

$$k = E_{max}/Sw_p$$

N

| $w_p = 1$ | ←N← | $k \geq 0.5$ | →Y→ | $w_p = -k + \sqrt{k^2 + 2}$ |

N

| $w_p > w_{max}$ | →Y→ | $w_p = w_{max}$ |

N

$$E_p = w_p \cdot E_{max}$$
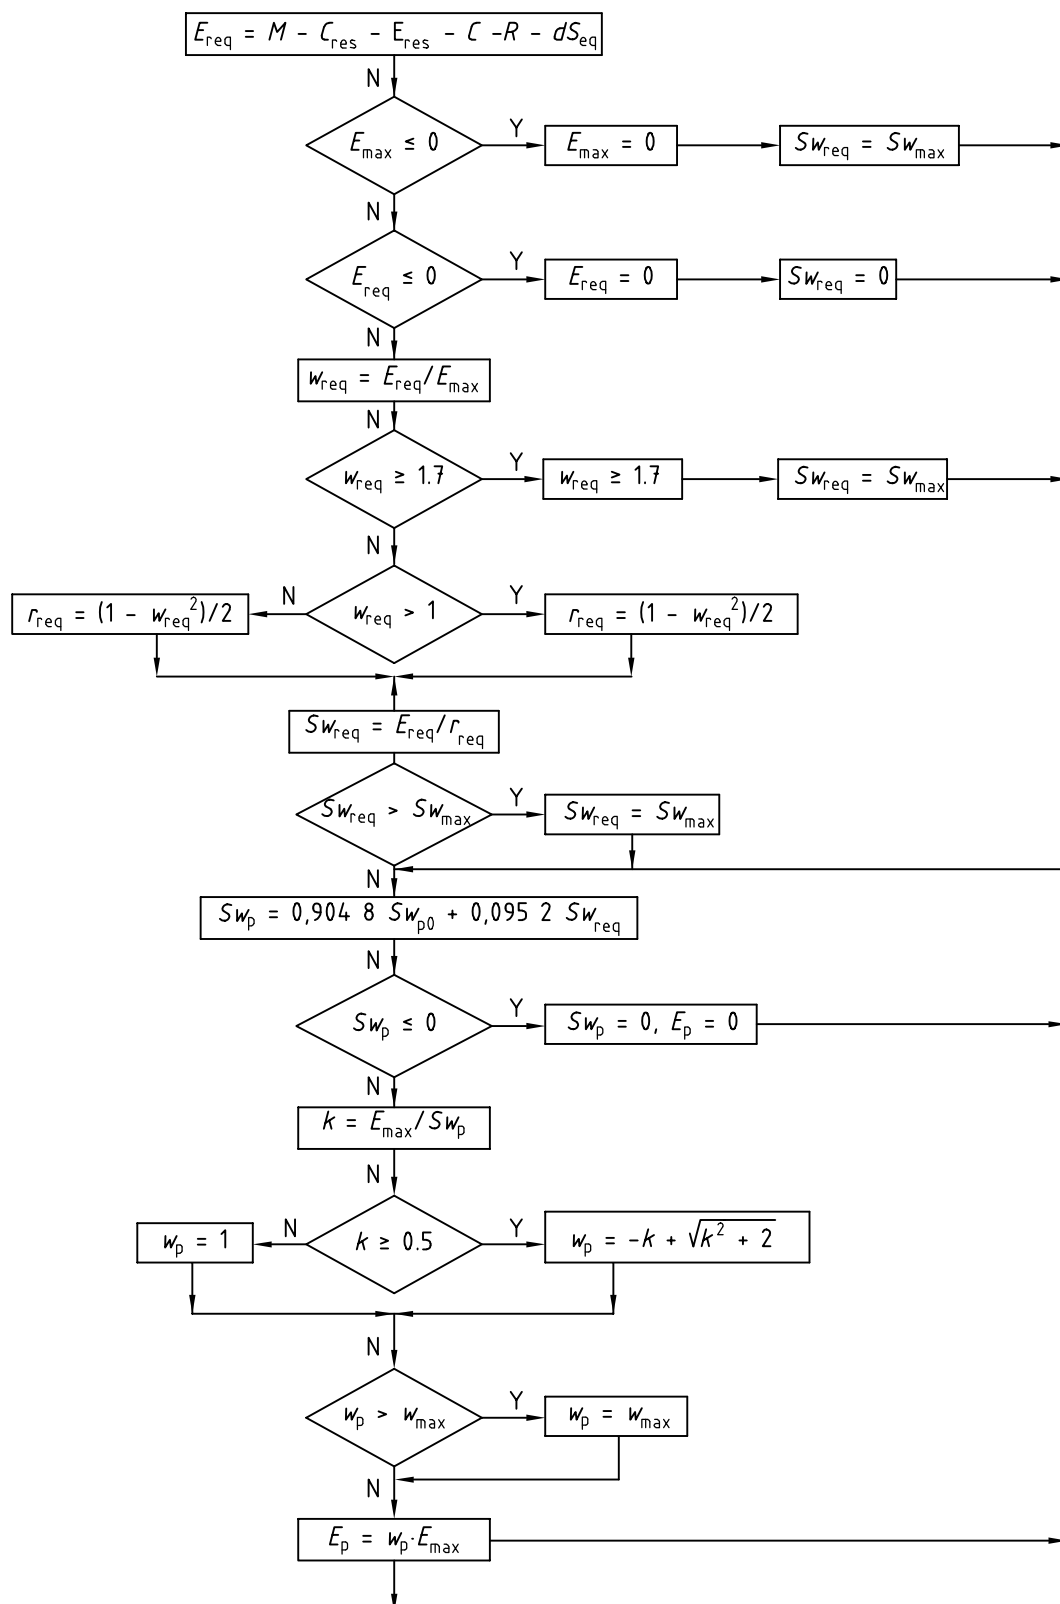
Key

N   no
Y   yes

Figure A.1 — Flow chart for the determination of the predicted sweat rate (Sw_p) and the predicted evaporative heat flow (E_p)
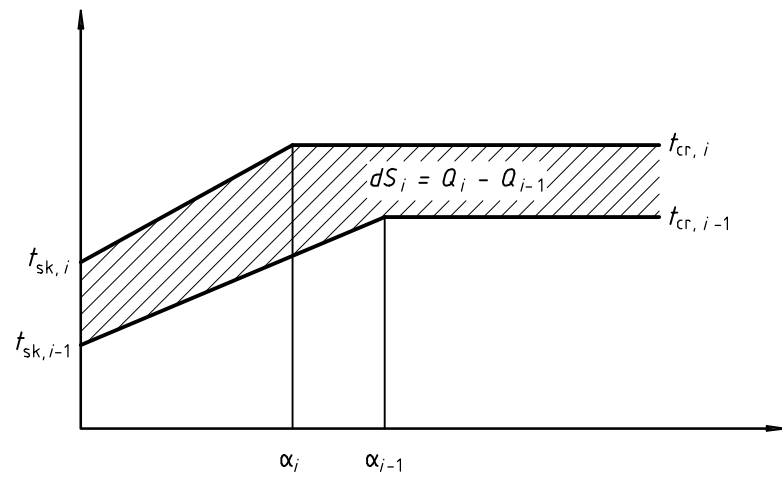
Figure A.2 — Distribution of heat storage in the body at times t_{i-1} and t_i

Annex B
(informative)

Criteria for estimating acceptable exposure time in a hot work environment

B.1 Introduction

The physiological criteria used for determining the maximum allowable exposure time are the following:

— acclimatized and non-acclimatised subjects;

— a maximum wettedness w_{max};

— a maximum sweat rate Sw_{max};

— consideration of the 50 % ("average" or "median" subject) and the 95 % percentile of the working population (representative of the most susceptible subjects);

— a maximum water loss D_{max};

— a maximum rectal temperature.

B.2 Acclimatized and non-acclimatized subjects

Acclimatized subjects are able to perspire more abundantly, more uniformly on their body surface and earlier than non-acclimatized subjects. In a given work situation, this results in a lower heat storage (lower core temperature) and lower cardiovascular constraint (lower heart rate). In addition, they are known to lose less salt through sweating and therefore to be able to endure a greater water loss.

This distinction between acclimatized and non-acclimatized is therefore essential. It concerns w_{max}, Sw_{max}.

B.3 Maximum skin wettedness, w_{max}

The maximum skin wettedness is set to 0,85 for non-acclimatized subjects and to 1,0 for acclimatized workers.

B.4 Maximum sweat rate, Sw_{max}

The maximum sweat rate can be estimated using the equations:

$$Sw_{max} = 2,6 \, (M - 32) \times A_{Du} \qquad \text{g·h}^{-1} \qquad \text{in the range from 650 g·h}^{-1} \text{ to 1 000 g·h}^{-1}.$$

or

$$Sw_{max} = (M - 32) \times A_{Du} \qquad \text{W·m}^{-2} \qquad \text{in the range from 250 W·m}^{-2} \text{ to 400 W·m}^{-2}$$

For acclimatized subjects, the maximum sweat rate is, on average, 25 % greater than for un-acclimatized subjects.

B.5 Maximum dehydration and water loss

A 3 % dehydration induces an increased heart rate and depressed sweating sensitivity and is therefore adopted as the maximum dehydration in industry (not in the army or for sportsmen).

For exposure lasting 4 h to 8 h, a rehydration rate of 60 % is observed on average, regardless of the total amount of sweat produced, and is greater than 40 % in 95 % of the cases.

Based on these figures, the maximum water loss is set at

— 7,5 % of the body mass for an average subject (D_{max50}), or

— 5 % of the body mass for 95 % of the working population (D_{max95}).

Therefore, when the subjects can drink freely (DRINK = 1), the maximum allowable exposure time can be computed for an average subject on the basis of a maximum water loss of 7,5 % of the body mass and on the basis of 5 % of the body mass in order to protect 95 % of the working population.

If no water is provided (DRINK = 0), the total water loss should be limited to 3 %.

B.6 Maximum value of rectal temperature

Following the recommendations of the WHO technical report No 412 (1969)[1] : *"It is generally from the rectal temperature that is estimated the time at which it is necessary to interrupt a short duration exposure to intense heat in laboratory",* and *"It is inadvisable for deep body temperature to exceed 38 °C in prolonged daily exposure to heavy work".*

When, for a group of workers in a given working conditions, the average rectal temperature is equal to 38 °C, it can be estimated that the probability for a particular individual to reach higher rectal temperatures is limited as follows:

— for 42,0 °C   less than 10^{-7} (less than once every 40 years among 1 000 workers) (250 days per year);

— for 39,2 °C   less than 10^{-4} (less than one person at risk among 10 000 shifts).

---

1) WHO (1969) Health factors involved in working under conditions of heat stress. Technical report 412. WHO Scientific Group on Health Factors Involved in Working under Conditions of Heat Stress. Geneva, Switzerland.

Annex C
(informative)

Metabolic rate

Methods for determination of metabolic rate are given in ISO 8996. Tables C.1, C.2 and C.3 depict three different ways (from simple to more accurate) to estimate the metabolic rate for different activities.

Table C.1 — Classification of metabolic rate (in $W \cdot m^{-2}$) for kinds of activities (modified from ISO 7243[8]). Indicated metabolic rate refers to the average of 60 min of continuous work

Class	$W \cdot m^{-2}$	Examples
Resting	70	Sitting, standing at rest.
Very light activity	90	Light manual work (writing, typing, drawing); hand work (small bench tools, inspection, assembly or sorting of light materials).
Light activity	115	Arm work (driving vehicle in normal conditions, operating foot switch or pedal); machining with low power tools; light strolling.
Moderate activity	145	Sustained hand and arm work (hammering in nails, filing); arm and leg work (off-road operation of lorries, tractors or construction equipment.
Moderate to high activity	175	Arm and trunk work; work with pneumatic hammer, tractor assembly, intermittent handling of moderately heavy material, pushing or pulling light-weight carts or wheelbarrows, walking at a speed of 4 km/h to 5 km/h; snowmobile driving.
High activity	200	Intense arm and trunk work, carrying heavy material, shovelling; sledgehammer work; cutting trees by chainsaw, hand mowing; digging; walking at a speed of 5 km/h to 6 km/h Pushing or pulling heavily loaded hand carts or wheelbarrows; chipping castings; concrete block laying; snowmobile in heavy terrain.
Very high activity	> 230	Very intense activity at fast to maximum pace; working with an axe; intense shovelling or digging; climbing stairs, ramp or ladder; walking quickly with small steps; running; walking at a speed greater than 6 km/h, walking in deep loose snow.

Table C.2 — Metabolic rate (in $W \cdot m^{-2}$) as a function of area of the body involved and the intensity of the work with that part of the body

Areas of body involved	Work		
	light	medium	heavy
both hands	65	85	95
one arm	100	120	140
both arms	135	150	165
whole body	190	255	345

Table C.3 — Metabolic rate (in W·m^{-2}**) for specific activities**

Activities		W·m^{-2}
Sleeping		40
At rest, sitting		55
At rest; standing		70
Walking on the level, even path, solid		
1. without load	at 2 km/h	110
	at 3 km/h	140
	at 4 km/h	165
	at 5 km/h	200
2. with load	10 kg, 4 km/h	185
	30 kg, 4 km/h	250
Walking uphill, even path, solid		
1. without load	5° inclination, 4 km/h	180
	15° inclination, 3 km/h	210
	25° inclination, 3 km/h	300
2. with load of 20 kg	15° inclination, 4 km/h	270
	25° inclination, 4 km/h	410
Walking downhill at 5 km/h, without load	5° inclination	135
	15° inclination	140
	25° inclination	180
Ladder at 70° going up at a rate of 11,2 m/min		
	without load	290
	with a 20 kg load	360
Pushing or pulling a tip-wagon, 3,6 km/h, even path, solid		
	pushing force: 12 kg	290
	pulling force: 16 kg	375
Pushing a wheelbarrow, even path, 4,5 km/h, rubber tires, 100 kg load		230
Filing iron	42 file strokes/min	100
	60 file strokes/min	190
Work with a hammer, 2 hands, weight of the hammer 4,4 kg, 15 strokes/min		290
Carpentry work	hand sawing	220
	machine sawing	100
	hand planning	300
Brick-laying, 5 bricks/min		170
Screw driving		100
Digging a trench		290
Work on a machine tool		
	light (adjusting, assembling)	100
	medium (loading)	140
	heavy	210
Work with a hand tool		
	light (light polishing)	100
	medium (polishing)	160
	heavy (heavy drilling)	230

Annex D
(informative)

Clothing thermal characteristics

D.1 General

The thermal characteristics of the clothing that must be considered are

— its thermal insulation;

— its reflection of thermal radiation, and

— its permeability to water vapour.

D.2 Thermal insulation

The thermal insulation is defined in clo. Table D.1 gives the basic insulation values for selected garment ensembles.

Table D.1 — Basic insulation values for selected garment ensembles

Garment ensembles	I_{cl} clo
Briefs, short-sleeve shirt, fitted trousers, calf length socks, shoes	0,5
Underpants, shirt, fitted trousers, socks, shoes	0,6
Underpants, coverall, socks, shoes	0,7
Underpants, shirt, coverall, socks, shoes	0,8
Underpants, shirt, trousers, smock, socks, shoes	0,9
Briefs, undershirt, underpants, shirt, overalls, calf length socks, shoes	1,0
Underpants, undershirt, shirt, trousers, jacket, vest, socks, shoes	1,1

D.3 Reflection of thermal radiation

Table D.2 gives the reflection coefficients (F_r) for different special materials coated with aluminium to reflect thermal radiation.

Table D.2 — Reflection coefficients, F_r, for different special materials

Material	Treatment	F_r
Cotton	with aluminium paint	0,42
Viscose	with glossy aluminium foil	0,19
Aramid (Kevlar)	with glossy aluminium foil	0,14
Wool	with glossy aluminium foil	0,12
Cotton	with glossy aluminium foil	0,04
Viscose	vacuum metallized with aluminium	0,06
Aramid	vacuum metallized with aluminium	0,04
Wool	vacuum metallized with aluminium	0,05
Cotton	vacuum metallized with aluminium	0,05
Glass fiber	vacuum metallized with aluminium	0,07

This reduction only occurs for the part of the body covered by the reflective clothing. Table D.3 provides information to estimate the fraction (A_p) of the area of the body concerned.

Table D.3 — Ratio of the area of a part of the body to the total body surface

Area	A_p
Head and face	0,07
Thorax and abdomen	0,175
Back	0,175
Arms	0,14
Hands	0,05
Tights	0,19
Legs	0,13
Feet	0,07

D.4 Permeability to water vapour

The evaporative resistance of the clothing is strongly influenced by the permeability to vapour pressure of the material, which can be defined by the static moisture permeability index (i_{mst}). As the present International Standard is not applicable to special clothing, a mean value of i_{mst} equal to 0,38 can be adopted.

Annex E
(informative)

Computer programme for the computation of the Predicted Heat Strain Model

E.1 General

The correspondence between the symbols given in Table 1 and those used in the following computer programme are detailed in Table E.1.

An electronic copy of this programme for the predicted heat-strain model calculations can be downloaded from the Web at the following address:

http://www.md.ucl.ac.be/hytr/new/Download/iso7933n.txt

Table E.1 — Correspondence between the symbols given in Table 1 and those used in the computer programme

Symbol	Symbol in the program	Symbol	Symbol in the program	Symbol	Symbol in the program
—	defspeed	$F_{cl,R}$	FclR	$t_{cr,eq\ i-1}$	Tcreq0
—	defdir	F_r	Fr	$t_{cr,i}$	Tcr
α	—	H_b	height	$t_{cr,i-1}$	Tcr0
α_i	TskTcrwg	h_{cdyn}	Hcdyn	t_{ex}	Texp
α_{i-1}	TskTcrwg0	h_r	Hr	t_r	Tr
ε	—	$I_{a\ st}$	Iast	t_{re}	—
θ	Theta	$I_{cl\ st}$	Iclst	$t_{re,\ max}$	—
A_{Du}	Adu	I_{cl}	Icl	$t_{re,i}$	Tre
A_p	Ap	$I_{tot\ st}$	Itotst	$t_{re,i-1}$	Tre0
A_r	Ardu	$I_{a\ dyn}$	Iadyn	$t_{sk,eq}$	Tskeq
C	Conv	$I_{cl\ dyn}$	Icldyn	$t_{sk,eq\ nu}$	Tskeqnu
c_e	—	$I_{tot\ dyn}$	Itotdyn	$t_{sk,eq\ cl}$	Tskeqcl
$C_{orr,cl}$	CORcl	i_{mst}	imst	$t_{sk,i}$	Tsk
$C_{orr,la}$	CORia	i_{mdyn}	imdyn	$t_{sk,i-1}$	Tsk0
$C_{orr,tot}$	CORtot	$incr$	Incr		
$C_{orr,E}$	CORe	K	—	V	—
c_p	—	M	Met	v_a	Va
C_{res}	Cres	p_a	Pa	v_w	Walksp
c_{sp}	spHeat	$p_{sk,s}$	Psk	v_{ar}	Var
D_{lim}	Dlim	R	Rad	w	w
$D_{lim\ tre}$	Dlimtre	r_{req}	Eveff	W	Work
$D_{limloss50}$	Dlimloss50	R_{tdyn}	Rtdyn	W_a	—
$D_{limloss95}$	Dlimloss95	S	—	W_b	weight
D_{max}	Dmax	S_{eq}	—	W_{ex}	—
D_{max50}	Dmax50	Sw_{max}	SWmax	w_{max}	wmax
D_{max95}	Dmax95	Sw_p	—	w_p	wp
DRINK	DRINK	$Sw_{p,i}$	SWp	w_{req}	wreq
dS_i	dStorage	$Sw_{p,i-1}$	SWp0		
dS_{eq}	dStoreq	Sw_{req}	SWreq		
E	—	t	t		
E_{max}	Emax	t_a	Ta		
E_p	Ep	t_{cl}	Tcl		
E_{req}	Ereq	t_{cr}	Tcr		
E_{res}	Eres	$t_{cr,eqm}$	Tcreqm		
f_{cl}	fcl	$t_{cr,eq\ i}$	Tcreq		

 25

E.2 Programme

' INITIALISATION

 CLS

'   The user must make sure that, at this point in the programme,

'   the following parameters are available.

'   Standard values must be replaced by actual values if necessary.

'   The water replacement is supposed to be sufficient so that the workers

     can drink freely (DRINK=1), otherwise the value DRINK=0 must be used

     weight = 75: ' body mass kilograms

     height = 1.8: ' body height meters

     Adu = .202 * weight ^ .425 * height ^ .725

     spHeat = 57.83 * weight / Adu

     SWp = 0

     SWtot = 0: Tre = 36.8: Tcr = 36.8: Tsk = 34.1: Tcreq = 36.8: TskTcrwg = .3

     Dlimtre = 0: Dlimloss50 = 0: Dlimloss95 = 0

     Dmax50 = .075 * weight * 1000

     Dmax95 = .05 * weight * 1000

' EXPONENTIAL AVERAGING CONSTANTS

' Core temperature as a function of the metabolic rate: time constant: 10 minutes

     ConstTeq = EXP(-1 / 10)

' Skin Temperature: time constant: 3 minutes

     ConstTsk = EXP(-1 / 3)

' Sweat rate: time constant: 10 minutes

     ConstSW = EXP(-1 / 10)

Duration = 480: 'the duration of the work sequence in minutes

FOR time = 1 TO Duration

' INITIALISATION MIN PER MIN

Tsk0 = Tsk: Tre0 = Tre: Tcr0 = Tcr: Tcreq0 = Tcreq: TskTcrwg0 = TskTcrwg

' INPUT OF THE PRIMARY PARAMETERS

' The user must make sure that, at this point in the programme,

' the following parameters are available. In order for the user

' to test rapidly the programme, the data for the first case

' in annex E of the ISO 7933 standard are introduced.

Ta = 40: 'air temperature degrees celsius

Tr = 40: 'mean radiant temperature degrees celsius

Pa = 2.5: 'partial water vapour pressure kilopascals

Va = .3: 'air velocity metres per second

Met = 150: 'metabolic rate Watts per square meter

Work = 0: 'effective mechanical power Watts per square metre

'Posture posture = 1 sitting, =2 standing, =3 crouching

posture = 2

Icl = .5: 'static thermal insulation clo

imst = .38: 'static moisture permeability index dimensionless

Ap = .54: 'fraction of the body surface covered

    'by the reflective clothing dimensionless

Fr = .97: 'emissivity of the reflective clothing dimensionless

    '(by default: Fr=0.97)

'Ardu dimensionless

defspeed = 0: 'code =1 if walking speed entered, 0 otherwise

Walksp = 0: 'walking speed metres per second

defdir = 0: 'code =1 if walking direction entered, 0 otherwise

THETA = 0: 'angle between walking direction and wind direction degrees

accl = 100: 'code =100 if acclimatised subject, 0 otherwise

' Effective radiating area of the body

    IF posture = 1 THEN Ardu = .7

    IF posture = 2 THEN Ardu = .77

    IF posture = 3 THEN Ardu = .67

' EVALUATION OF THE MAXIMUM SWEAT RATE AS A FUNCTION OF THE METABOLIC RATE

    SWmax = (Met - 32) * Adu

    IF SWmax > 400 THEN SWmax = 400

    IF SWmax < 250 THEN SWmax = 250

' For acclimatised subjects (accl=100), the maximum Sweat Rate is greater by 25%

    IF accl >= 50 THEN SWmax = SWmax * 1.25

    IF accl < 50 THEN Wmax = .85 ELSE Wmax = 1

' EQUILIBRIUM CORE TEMPERATURE ASSOCIATED TO THE METABOLIC RATE

    Tcreqm = .0036 * (Met-55) + 36.8

' Core temperature at this minute, by exponential averaging

    Tcreq = Tcreq0 * ConstTeq + Tcreqm * (1 - ConstTeq)

' Heat storage associated with this core temperature increase during the last minute

    dStoreq = spHeat * (Tcreq - Tcreq0) * (1 - TskTcrwg0)

' SKIN TEMPERATURE PREDICTION

' Skin Temperature in equilibrium

' Clothed model

    Tskeqcl = 12.165 + .02017 * Ta + .04361 * Tr + .19354 * Pa - .25315 * Va

    Tskeqcl = Tskeqcl + .005346 * Met + .51274 * Tre

' Nude model

    Tskeqnu = 7.191 + .064 * Ta + .061 * Tr + .198 * Pa - .348 * Va

    Tskeqnu = Tskeqnu + .616 * Tre

' Value at this minute, as a function of the clothing insulation

    IF Icl >= .6 THEN Tskeq = Tskeqcl: GOTO Tsk

    IF Icl <= .2 THEN Tskeq = Tskeqnu: GOTO Tsk

' Interpolation between the values for clothed and nude subjects, if 0.2 < clo < 0.6

    Tskeq = Tskeqnu + 2.5 * (Tskeqcl - Tskeqnu) * (Icl - .2)

' Skin Temperature at this minute, by exponential averaging

Tsk:

    Tsk = Tsk0 * ConstTsk + Tskeq * (1 - ConstTsk)

' Saturated water vapour pressure at the surface of the skin

    Psk = .6105 * EXP(17.27 * Tsk / (Tsk + 237.3))

' CLOTHING INFLUENCE ON EXCHANGE COEFFICIENTS

' Static clothing insulation

    Iclst = Icl * .155

' Clothing area factor

    fcl = 1 + .3 * Icl

' Static boundary layer thermal insulation in quiet air

    Iast = .111

' Total static insulation

Itotst = Iclst + Iast / fcl

' Relative velocities due to air velocity and movements

    IF defspeed > 0 THEN

        IF defdir = 1 THEN

        ' Unidirectional walking

            Var = ABS(Va - Walksp * COS(3.14159 * THETA / 180))

        ELSE

        ' Omni-directional walking

            IF Va < Walksp THEN Var = Walksp ELSE Var = Va

        END IF

    ELSE

        ' Stationary or undefined speed

        Walksp = .0052 * (Met - 58): IF Walksp > .7 THEN Walksp = .7

        Var = Va

    END IF

' Dynamic clothing insulation

' Clothing insulation correction for wind (Var) and walking (Walksp)

    Vaux = Var: IF Var > 3 THEN Vaux = 3

    Waux = Walksp: IF Walksp > 1.5 THEN Waux = 1.5

    CORcl = 1.044 * EXP((.066 * Vaux - .398) * Vaux + (.094 * Waux - .378) * Waux)

    IF CORcl > 1 THEN CORcl = 1

    CORia = EXP((.047 * Var - .472) * Var + (.117 * Waux - .342) * Waux)

    IF CORia > 1 THEN CORia = 1

    CORtot = CORcl

    IF Icl <= .6 THEN CORtot = ((.6 - Icl) * CORia + Icl * CORcl) / .6

    Itotdyn = Itotst * CORtot

    IAdyn = CORia * Iast

    Icldyn = Itotdyn - IAdyn / fcl

' Permeability index

' Correction for wind and walking

    CORe = (2.6 * CORtot - 6.5) * CORtot + 4.9

    imdyn = imst * CORe: IF imdyn > .9 THEN imdyn = .9

 29

' Dynamic evaporative resistance

 Rtdyn = Itotdyn / imdyn / 16.7

' HEAT EXCHANGES

' Heat exchanges through respiratory convection and evaporation

 ' temperature of the expired air

 Texp = 28.56 + .115 * Ta + .641 * Pa

 Cres = .001516 * Met * (Texp - Ta)

 Eres = .00127 * Met * (59.34 + .53 * Ta - 11.63 * Pa)

' Mean temperature of the clothing: Tcl

' Dynamic convection coefficient

 Z = 3.5 + 5.2 * Var

 IF Var > 1 THEN Z = 8.7 * Var ^ .6

 Hcdyn = 2.38 * ABS(Tsk - Ta) ^ .25

 IF Z > Hcdyn THEN Hcdyn = Z

 auxR = 5.67E-08 * Ardu

 FclR = (1 - Ap) * .97 + Ap * Fr

 Tcl = Tr + .1

Tcl:

' Radiation coefficient

 Hr = FclR * auxR * ((Tcl + 273) ^ 4 - (Tr + 273) ^ 4) / (Tcl - Tr)

 Tcl1 = ((fcl * (Hcdyn * Ta + Hr * Tr) + Tsk / Icldyn)) / (fcl * (Hcdyn + Hr) + 1 / Icldyn)

 IF ABS(Tcl - Tcl1) > .001 THEN

  Tcl = (Tcl + Tcl1) / 2

  GOTO Tcl

 END IF

' Convection and Radiation heat exchanges

 Conv = fcl * Hcdyn * (Tcl - Ta)

 Rad = fcl * Hr * (Tcl - Tr)

' Maximum Evaporation Rate

 Emax = (Psk - Pa) / Rtdyn

' Required Evaporation Rate

 Ereq = Met - dStoreq - Work - Cres - Eres - Conv - Rad

' INTERPRETATION

' Required wettedness

wreq = Ereq / Emax

' Required Sweat Rate

' If no evaporation required: no sweat rate

IF Ereq <= 0 THEN Ereq = 0: SWreq = 0: GOTO SWp

' If evaporation is not possible, sweat rate is maximum

IF Emax <= 0 THEN Emax = 0: SWreq = SWmax: GOTO SWp

' If required wettedness greater than 1.7: sweat rate is maximum

IF wreq >= 1.7 THEN wreq = 1.7: SWreq = SWmax: GOTO SWp

' Required evaporation efficiency

Eveff = (1 - wreq ^ 2 / 2)

IF wreq > 1 THEN Eveff = (2 - wreq) ^ 2 / 2

SWreq = Ereq / Eveff

IF SWreq > SWmax THEN SWreq = SWmax

SWp:

' Predicted Sweat Rate, by exponential averaging

SWp = SWp * ConstSW + SWreq * (1 - ConstSW)

IF SWp <= 0 THEN Ep = 0: SWp = 0: GOTO Storage

' Predicted Evaporation Rate

k = Emax / SWp

wp = 1

IF k >= .5 THEN wp = -k + SQR(k * k + 2)

IF wp > Wmax THEN wp = Wmax

Ep = wp * Emax

' Heat Storage

Storage:

dStorage = Ereq - Ep + dStoreq

' PREDICTION OF THE CORE TEMPERATURE

Tcr1 = Tcr0

© ISO 2004 – All rights reserved

TskTcr:

' Skin - Core weighting

TskTcrwg = .3 - .09 * (Tcr1 - 36.8)

IF TskTcrwg > .3 THEN TskTcrwg = .3

IF TskTcrwg < .1 THEN TskTcrwg = .1

Tcr = dStorage / spHeat + Tsk0 * TskTcrwg0 / 2 - Tsk * TskTcrwg / 2

Tcr = (Tcr + Tcr0 * (1 - TskTcrwg0 / 2)) / (1 - TskTcrwg / 2)

IF ABS(Tcr - Tcr1) > .001 THEN

Tcr1 = (Tcr1 + Tcr) / 2: GOTO TskTcr

END IF

' PREDICTION OF THE RECTAL TEMPERATURE

Tre = Tre0 + (2 * Tcr - 1.962 * Tre0 - 1.31) / 9

IF Dlimtre = 0 AND Tre >= 38 THEN Dlimtre = time

' Total water loss rate during the minute (in W m^{-2})

SWtot = SWtot + SWp + Eres

SWtotg = SWtot * 2.67 * Adu / 1.8 / 60

IF Dlimloss50 = 0 AND SWtotg >= Dmax50 THEN Dlimloss50 = time

IF Dlimloss95 = 0 AND SWtotg >= Dmax95 THEN Dlimloss95 = time

IF DRINK =0 then Dlimloss95 = Dlimloss95 * 0.6: Dlimloss50 = Dlimloss95

' End of loop on duration

NEXT time

' Dlim computation

IF Dlimloss50 = 0 THEN Dlimloss50 = Duration

IF Dlimloss95 = 0 THEN Dlimloss95 = Duration

IF Dlimtre = 0 THEN Dlimtre = Duration

PRINT "tre="; Tre

PRINT "SWtotg="; SWtotg

PRINT "Dlimtre="; Dlimtre

PRINT "Dlimloss50="; Dlimloss50

PRINT "Dlimloss95="; Dlimloss95

END

Annex F
(normative)

Examples of the Predicted Heat Strain Model computations

This annex provides the primary data and the main output data for 10 working conditions. This should be used to test that any particular version of the programme prepared from Annex E provides correct results within computational accuracy of 0.1 °C for the predicted rectal temperature and 1 % for water loss.

These 10 conditions were selected in order to tests all the different components of the programme.

Parameters (units)	Examples of working conditions									
	1	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**
Acclimatized	Yes	Yes	Yes	No	No	Yes	No	No	Yes	Yes
Posture	Standing	Standing	Standing	Standing	Sitting	Sitting	Standing	Standing	Standing	Standing
t_a (°C)	40	35	30	28	35	43	35	34	40	40
p_a (kPa)	2,5	4,0	3,0	3,0	3,0	3,0	3,0	3,0	3,0	3,0
t_r (°C)	40	35	50	58	35	43	35	34	40	40
v_a (m·s^{-1})	0,3	0,3	0,3	0,3	1,0	0,3	0,3	0,3	0,3	0,3
M (W·m^{-2})	150	150	150	150	150	103	206	150	150	150
I_{cl} (clo)	0,5	0,5	0,5	0,5	0,5	0,5	0,5	1,0	0,4	0,4
θ (degrees)	0	0	0	0	0	0	0	0	0	90
Walk speed (m·s^{-1})	0	0	0	0	0	0	0	0	0	1
Final t_{re} (°C)	37,5	39,8	37,7	41,2	37,6	37,3	39,2	41,0	37,5	37,6
Water loss (g)	6168	6935	7166	5807	3892	6763	7236	5548	6684	5379
$D_{lim\,tre}$ (min)	480	74	480	57	480	480	70	67	480	480
$D_{limloss50}$ (min)	439	385	380	466	480	401	372	480	407	480
$D_{limloss95}$ (min)	298	256	258	314	463	271	247	318	276	339

Bibliography

[1]   MALCHAIRE J. (1999), *Evaluation and control of warm working conditions*, Proceedings of the BIOMED "Heat Stress" Conference, Barcelona, June 14-15

[2]   MALCHAIRE J., GEBHARDT H.J., PIETTE A. (1999), *Strategy for evaluation and prevention of risk due to work in thermal environment*, The Annals of Occupational Hygiene, **43**(5), pp. 367-376

[3]   HAVENITH G., HOLMÉR I., DEN HARTOG E.A., PARSONS K.C. (1999), *Clothing evaporative heat resistance. Proposal for improved representation in standards and models*, The Annals of Occupational Hygiene, July, **43**(5), pp. 339-46

[4]   MALCHAIRE J., KAMPMANN B., HAVENITH G., MEHNERT P., GEBHARDT H.J. (2000), *Criteria for estimating acceptable exposure times in hot work environment, a review*, International Archives of Occupational and Environmental Health, **73**(4), pp. 215-220

[5]   MALCHAIRE J., PIETTE A., KAMPMANN B., MEHNERT P., GEBHARDT H., HAVENITH G., DEN HARTOG E., HOLMER I., PARSONS K., ALFANO G., GRIEFAHN B. (2000), *Development and validation of the predicted heat strain model*, The Annals of Occupational Hygiene, **45**(2), pp. 123-135

[6]   MEHNERT P., MALCHAIRE J., KAMPMANN B., PIETTE A., GRIEFAHN B., GEBHARDT H.J. (2000), *Prediction of the average skin temperature in warm and hot environments*, European Journal of Applied Physiology, **82**(1-2), pp. 52-60

[7]   PARSONS K.C., HAVENITH G., HOLMÉR I., NILSSON H., MALCHAIRE J. (1999), *The effects of wind and human movement on the heat and vapour transfer properties of clothing*, The Annals of Occupational Hygiene, **43**(5), pp. 347-352

[8]   ISO 7243, *Hot environments — Estimation of the heat stress on working man, based on the WBGT-index (wet bulb globe temperature)*

ISO 7933:2004(E)

ICS 13.180

Price based on 34 pages