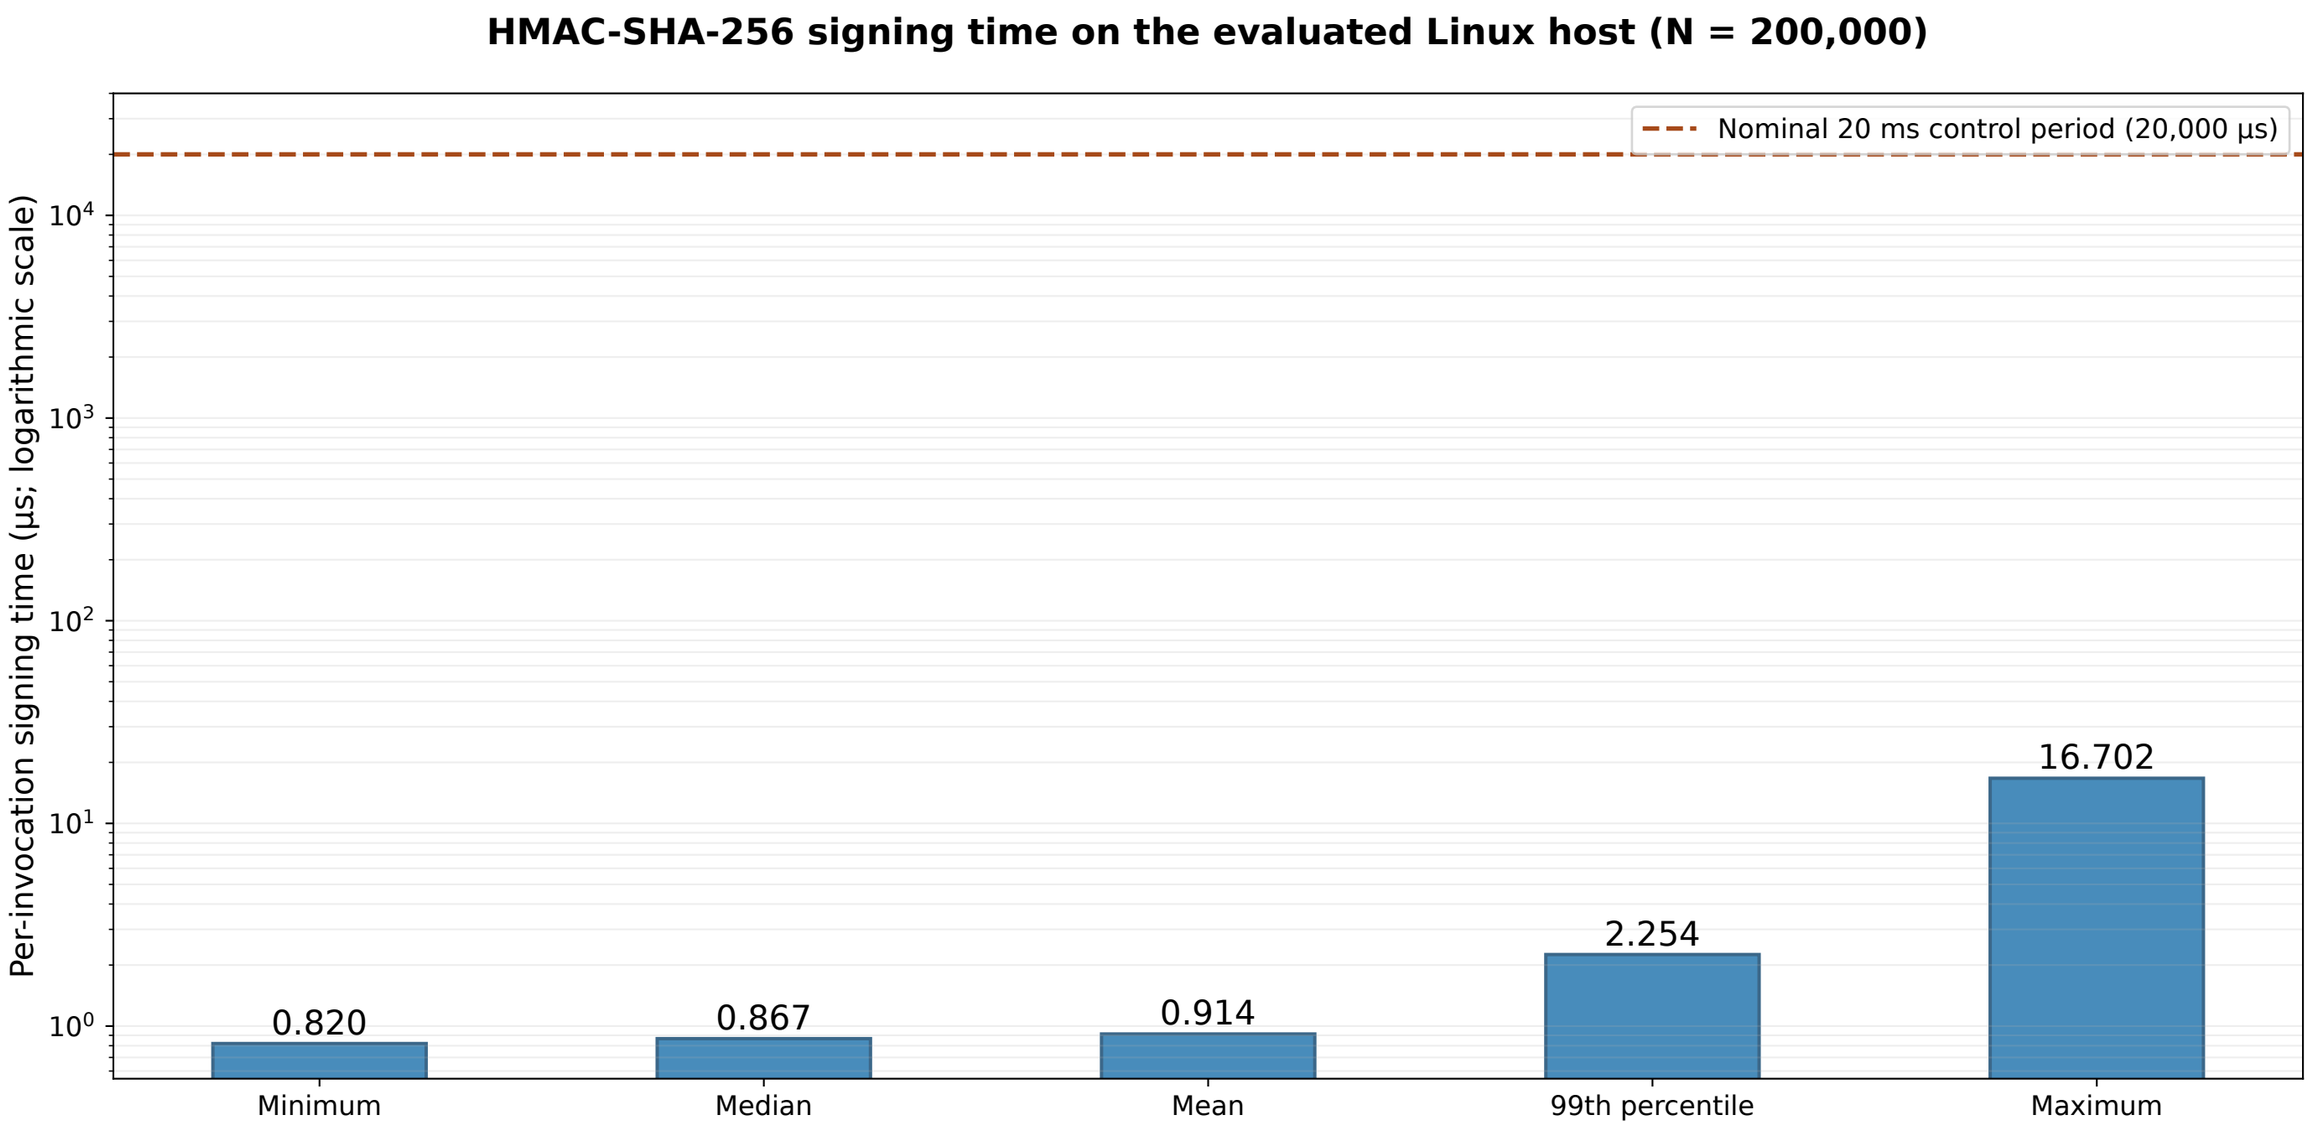

Cryptographic function timing only; the 20 ms reference is not measured end-to-end CAN or embedded latency.