





Logical Physical x: 508, y: 23

Root

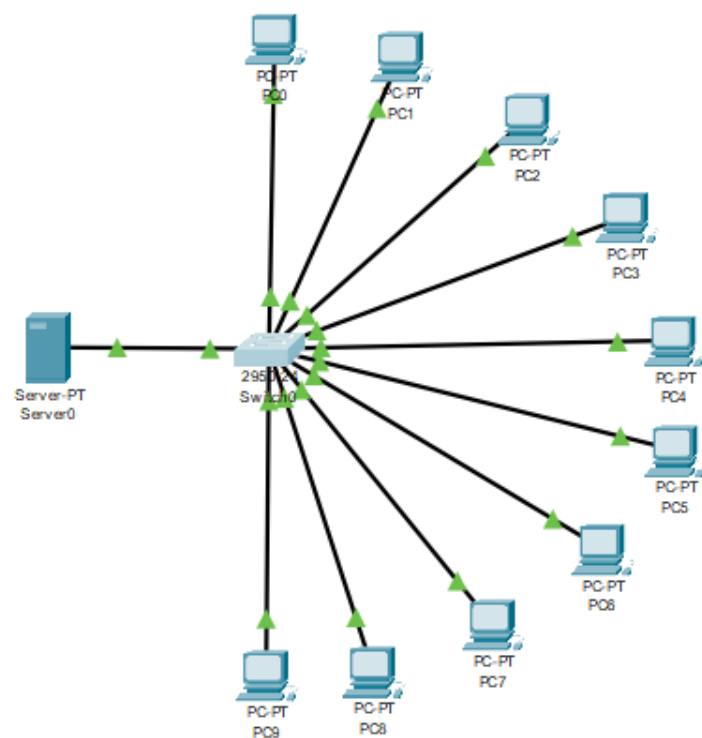

Time: 00:16:21

Realtime Simulation

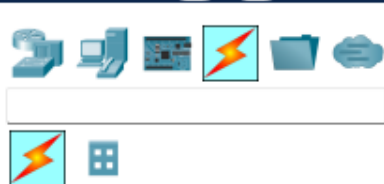

Automatically Choose Connection Type


Scenario 0


New

Delete

Toggle PDU List Window

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit
	Successful	PC0	PC3	ICMP	Green	0.000	N	0	(edit)
	Successful	Server0	PC8	ICMP	Red	0.000	N	1	(edit)



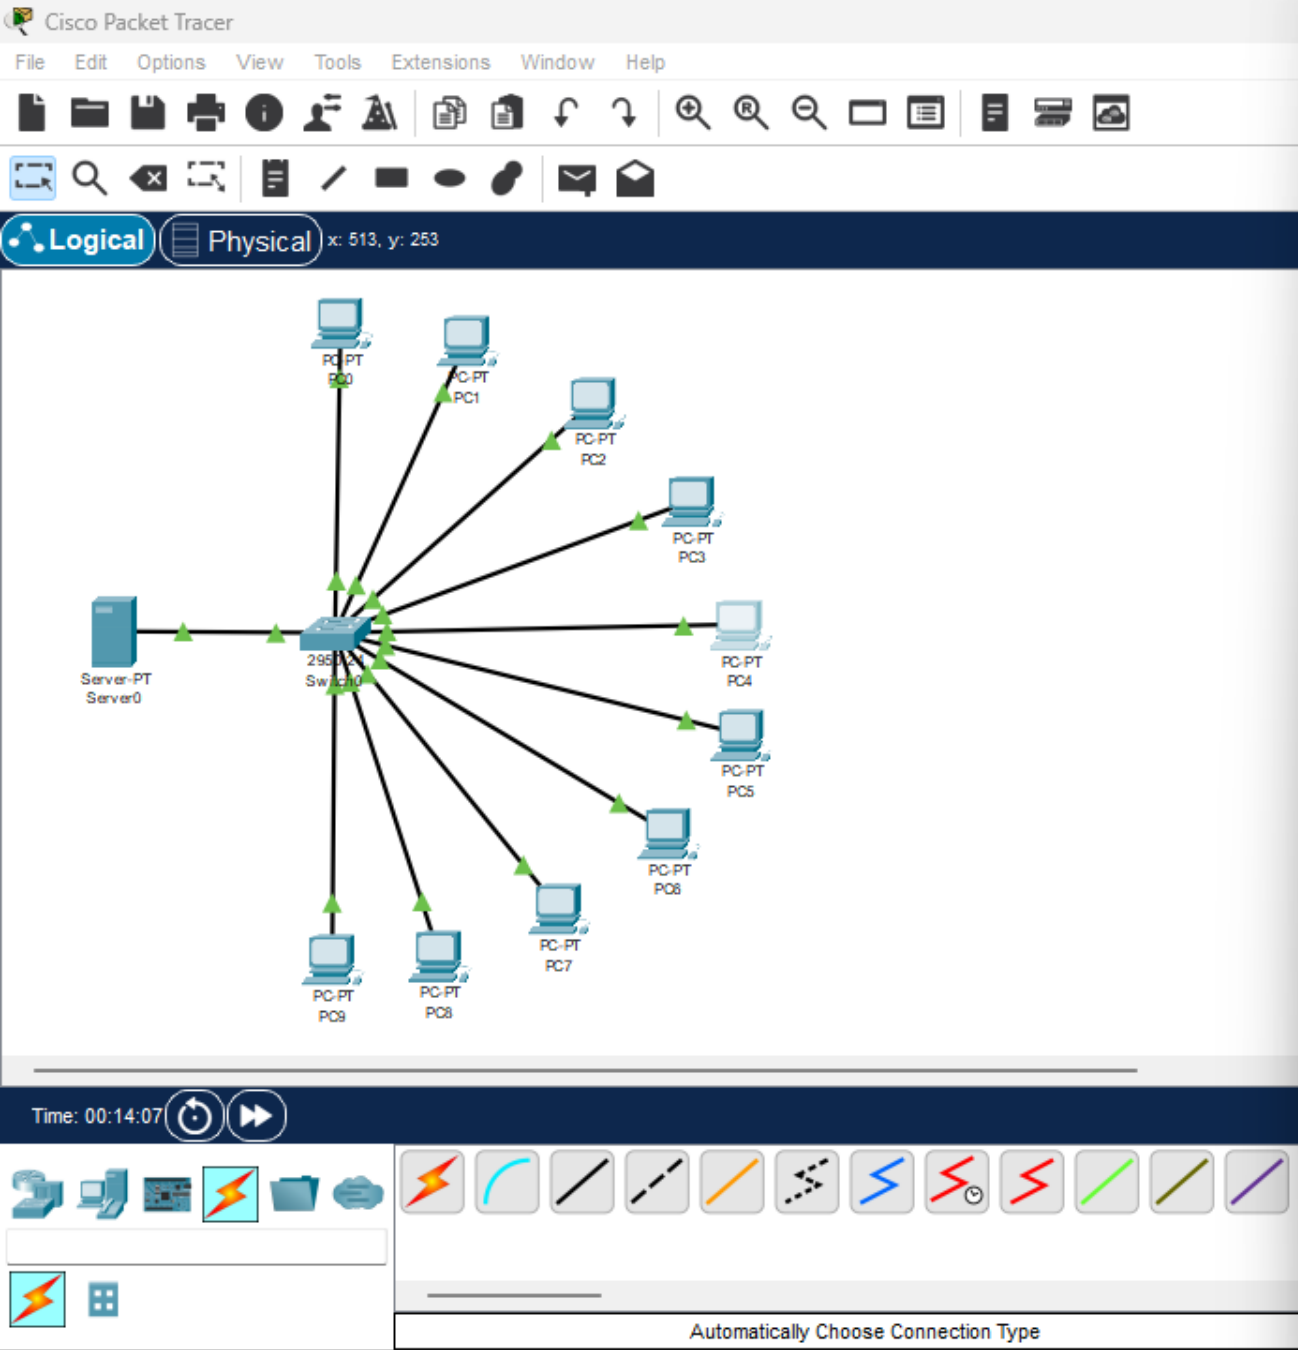

PC4

Physical Config Desktop Programming Attributes

### IP Configuration

Interface: FastEthernet0

IP Configuration

☒ DHCP ☐ Static DHCP request successful.

IPv4 Address: 192.168.1.6

Subnet Mask: 255.255.255.0

Default Gateway: 0.0.0.0

DNS Server: 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address: /

Link Local Address: FE80::201:97FF:FEE7:8095

Default Gateway:

DNS Server:

802.1X


☐ Use 802.1X Security

Authentication: MD5

Username:

Password:

☐ Top

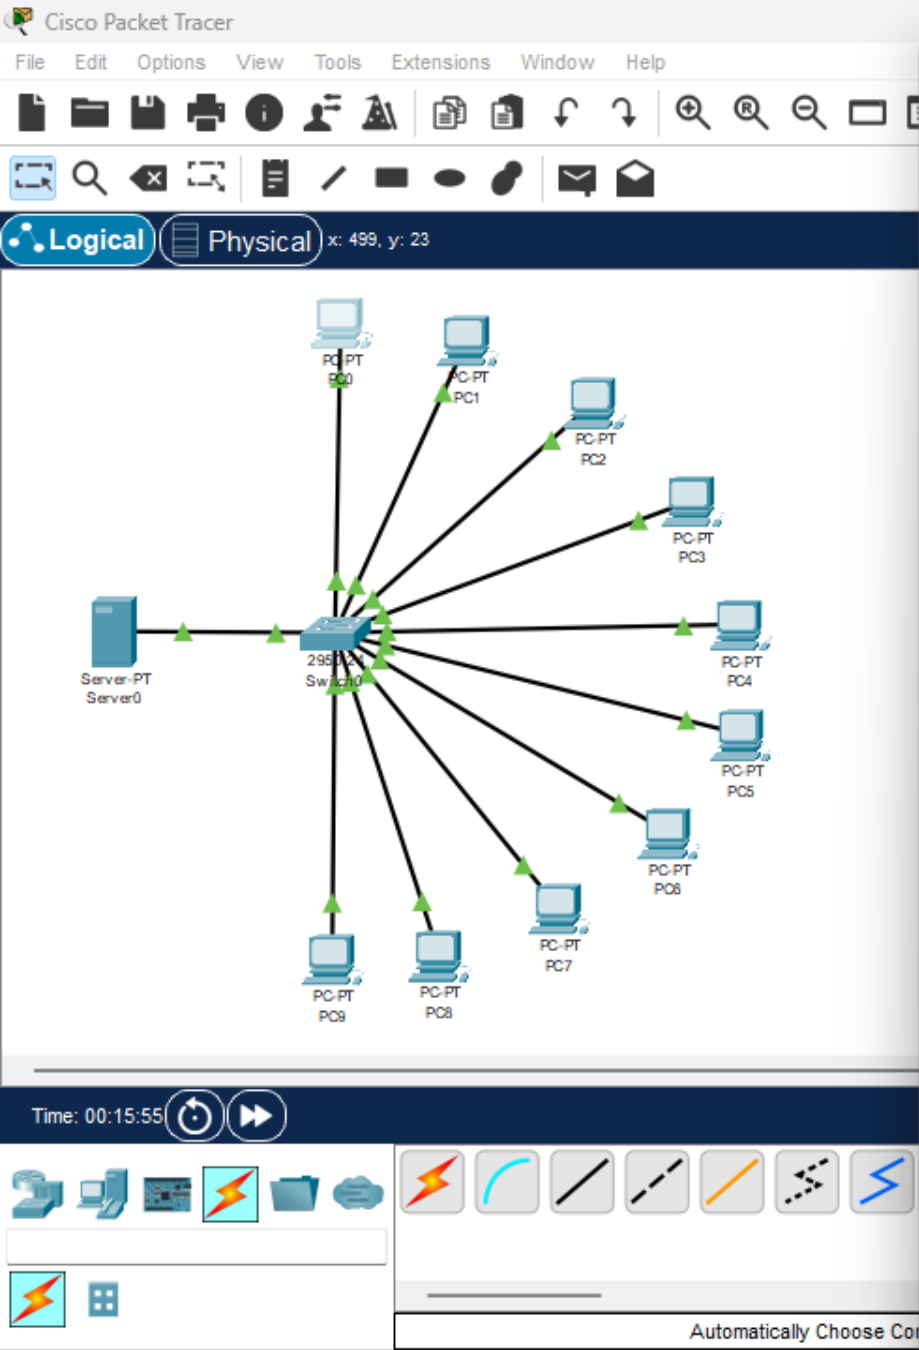

PC0

Physical Config **Desktop** Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.8

Pinging 192.168.1.8 with 32 bytes of data:

Reply from 192.168.1.8: bytes=32 time<1ms TTL=128
Reply from 192.168.1.8: bytes=32 time<1ms TTL=128
Reply from 192.168.1.8: bytes=32 time<1ms TTL=128
Reply from 192.168.1.8: bytes=32 time=1ms TTL=128

Ping statistics for 192.168.1.8:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

08:10:00

Realtime Simulation

Time(sec)	Periodic	Num	Edit
0.000	N	0	(edit)
0.000	N	1	(edit)