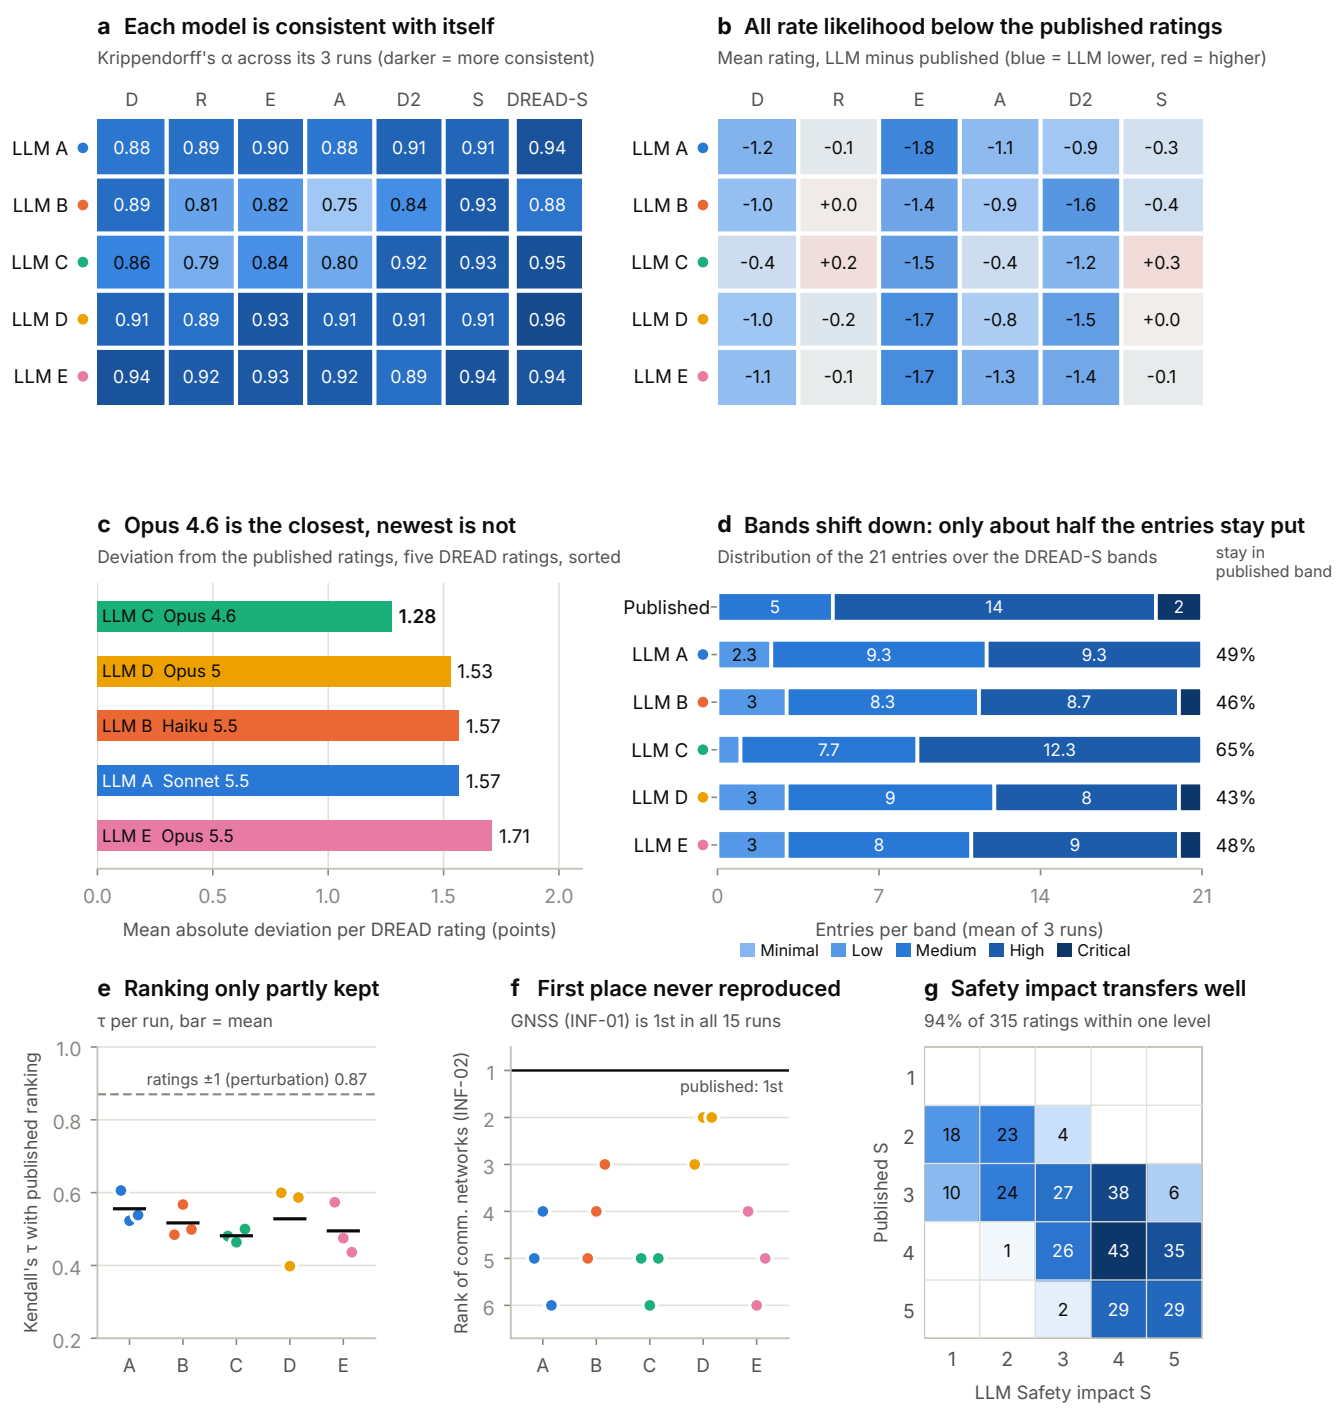
a Each model is consistent with itself
Krippendorff's α across its 3 runs (darker = more consistent)
D R E A D2 S DREAD-S
LLM A 0.88 0.89 0.90 0.88 0.91 0.91 0.94
LLM B 0.89 0.81 0.82 0.75 0.84 0.93 0.88
LLM C 0.86 0.79 0.84 0.80 0.92 0.93 0.95
LLM D 0.91 0.89 0.93 0.91 0.91 0.91 0.96
LLM E 0.94 0.92 0.93 0.92 0.89 0.94 0.94
b All rate likelihood below the published ratings
Mean rating, LLM minus published (blue = LLM lower, red = higher)
D R E A D2 S
LLM A -1.2 -0.1 -1.8 -1.1 -0.9 -0.3
LLM B -1.0 +0.0 -1.4 -0.9 -1.6 -0.4
LLM C -0.4 +0.2 -1.5 -0.4 -1.2 +0.3
LLM D -1.0 -0.2 -1.7 -0.8 -1.5 +0.0
LLM E -1.1 -0.1 -1.7 -1.3 -1.4 -0.1
c Opus 4.6 is the closest, newest is not
Deviation from the published ratings, five DREAD ratings, sorted
LLM C Opus 4.6 1.28
LLM D Opus 5 1.53
LLM B Haiku 5.5 1.57
LLM A Sonnet 5.5 1.57
LLM E Opus 5.5 1.71
0.0 0.5 1.0 1.5 2.0
Mean absolute deviation per DREAD rating (points)
d Bands shift down: only about half the entries stay put
Distribution of the 21 entries over the DREAD-S bands
stay in published band
Published 5 14 2
LLM A 2.3 9.3 9.3 49%
LLM B 3 8.3 8.7 46%
LLM C 7.7 12.3 65%
LLM D 3 9 8 43%
LLM E 3 8 9 48%
0 7 14 21
Entries per band (mean of 3 runs)
Minimal Low Medium High Critical
e Ranking only partly kept
τ per run, bar = mean
ratings ±1 (perturbation) 0.87
Kendall's τ with published ranking
1.0 0.8 0.6 0.4 0.2
A B C D E
f First place never reproduced
GNSS (INF-01) is 1st in all 15 runs
published: 1st
Rank of comm. networks (INF-02)
1 2 3 4 5 6
A B C D E
g Safety impact transfers well
94% of 315 ratings within one level
Published S
1 2 3 4 5
18 23 4
10 24 27 38 6
1 26 43 35
2 29 29
1 2 3 4 5
LLM Safety impact S