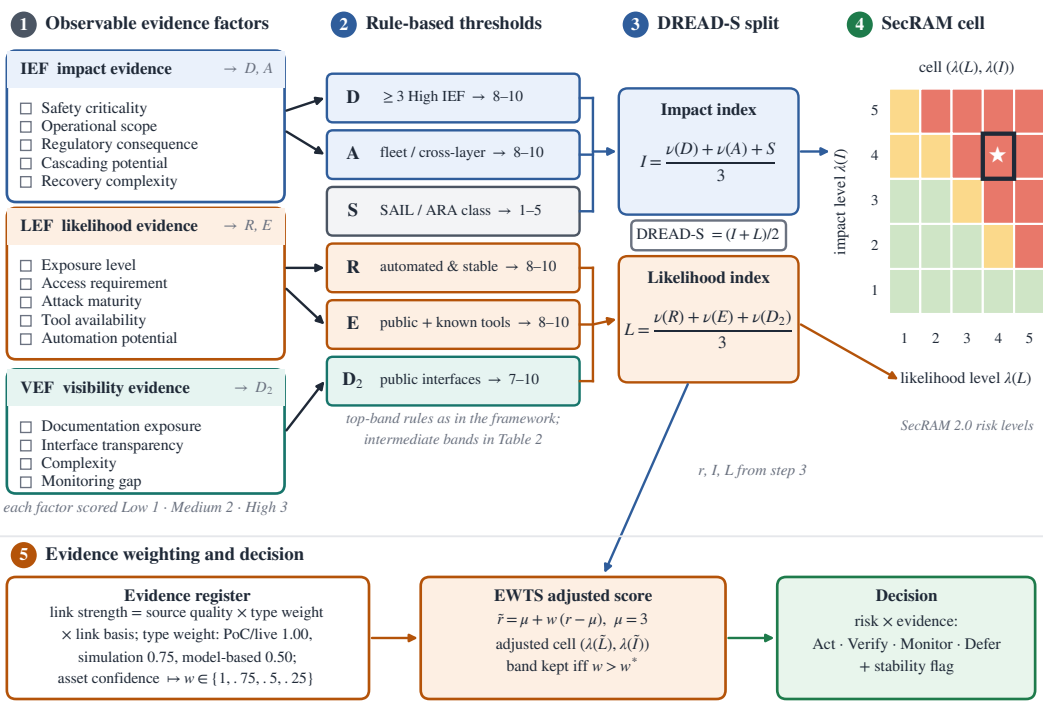
1 Observable evidence factors
2 Rule-based thresholds
3 DREAD-S split
4 SecRAM cell
IEF impact evidence → D, A
Safety criticality
Operational scope
Regulatory consequence
Cascading potential
Recovery complexity
LEF likelihood evidence → R, E
Exposure level
Access requirement
Attack maturity
Tool availability
Automation potential
VEF visibility evidence → D2
Documentation exposure
Interface transparency
Complexity
Monitoring gap
each factor scored Low 1 · Medium 2 · High 3
D ≥ 3 High IEF → 8–10
A fleet / cross-layer → 8–10
S SAIL / ARA class → 1–5
R automated & stable → 8–10
E public + known tools → 8–10
D2 public interfaces → 7–10
top-band rules as in the framework;
intermediate bands in Table 2
Impact index
$I = \frac{\nu(D) + \nu(A) + S}{3}$
DREAD-S $= (I + L)/2$
Likelihood index
$L = \frac{\nu(R) + \nu(E) + \nu(D_2)}{3}$
r, I, L from step 3
cell (λ(L), λ(I))
impact level λ(I)
likelihood level λ(L)
SecRAM 2.0 risk levels
5 Evidence weighting and decision
Evidence register
link strength = source quality × type weight
× link basis; type weight: PoC/live 1.00,
simulation 0.75, model-based 0.50;
asset confidence ↦ w ∈ {1, . 75, . 5, . 25}
EWTS adjusted score
$\tilde{r} = \mu + w(r - \mu),\ \mu = 3$
adjusted cell (λ(L̃), λ(Ĩ))
band kept iff $w > w^*$
Decision
risk × evidence:
Act · Verify · Monitor · Defer
+ stability flag