

Neural-field design of broadband Rayleigh-wave carpet cloaks under microstructure realisability constraints

David Aznaurov^{a,b}, David Piliposyan^a, Danila Rukhovich^a, Sébastien Guenneau^c

^a*M:3L Lab, Institute of Mechanics, 24B Baghramyan Ave., 0019 Yerevan, Armenia*

^b*Biutopic, 18 Rue Paul Ramadier, 44201 Nantes, France*

^c*The Blackett Laboratory, Department of Physics, UMI 2004 Abraham de Moivre-CNRS, Imperial College London, London SW7 2AZ, United Kingdom*

Abstract

Transformation elasticity provides appropriate material distributions for elastodynamic cloaks, but the required stiffness tensors generally violate the minor symmetries of classical Cauchy elasticity and are difficult to realise using conventional materials. Existing approaches restore these symmetries by modifying or symmetrising the transformed tensor, producing only an approximate cloak. Here we formulate 2D Rayleigh-wave carpet-cloak design as a Partial Differential Equation-constrained optimisation problem, using a coordinate-based neural network (neural-field) and a differentiable Finite Element Model (FEM) solver to optimise symmetric stiffness and density fields by minimising wave-field distortion. We consider both single-frequency and broadband optimisation, with the broadband model trained simultaneously over multiple frequencies. Physical realisability is addressed using a database of homogenised microstructures through conditional diffusion, neural-field inverse design, and nearest-neighbour selection. FEM simulations show that the unconstrained design **approaches to (G.P. not clear)** the ideal transformation-based cloaking, while the best realisable design retains over 95% of this performance, providing a direct route from continuum optimisation to microstructured Rayleigh-wave cloaks.

Keywords: elastic cloaking, Rayleigh waves, transformation elasticity, neural field, implicit neural representation, metamaterials

1. Introduction

Transformation elasticity is a systematic way to steer elastic waves around an object. A coordinate map $\mathbf{x} = \Xi(\mathbf{X})$ opens up room for the object to hide in, and rewriting the elastodynamic equations in the mapped coordinates prescribes a position-dependent material in a surrounding coating that guides waves past the object as if it were not there [1, 2, 3, 4]. It is the mechanical counterpart of transformation optics [5]. The “carpet cloak” variant, which hides a defect on an otherwise flat free surface [6], is the configuration most accessible to experiments in the three-dimensional elastostatic setting [7]. A two-dimensional mechanical cloak based on a direct lattice transformation was experimentally demonstrated in the static regime [8]; however, numerical simulations indicate that its cloaking performance deteriorates markedly beyond the quasi-static regime [9].

In [2, 4] the coating material follows from the Brun–Guenneau–Movchan (BGM) push-forward **method?**, $c_{ijkl}^{\text{eff}} = J^{-1} C_{IjKl} F_{iI} F_{kK}$ and $\rho^{\text{eff}} = \rho J^{-1}$, where $\mathbf{F} = \nabla_{\mathbf{X}} \mathbf{x}$ is the transformation gradient and $J = \det \mathbf{F}$ [2, 3]. The resulting tensor keeps the major symmetry of classical elasticity but breaks the minor symmetries, so the ideal cloak is a polar (Cosserat) medium that lies outside the class of ordinary Cauchy materials [10, 1]. Turning this exact but non-realisable prescription into a cloak that can be built from common materials is the problem we address. Alternatively, one can enforce the symmetry of the transformed elasticity tensor, but this leads to an elasticity equation with an anisotropic mass density and additional rank-3 tensors, hard to achieve in practice [1, 3].

The constraints on the material parameters can be **relaxed substantially** for two-dimensional elastic carpet cloaks, provided that the defect on the free surface is smooth [11]. These cloaks are particularly well suited to controlling surface Rayleigh waves, which propagate along the free surface of a two-dimensional half-space.

Inspired by the study [11], we focus on carpet cloaks for Rayleigh waves. The exact cloak is described by the polar tensor introduced above, while approaches to realising it using ordinary materials can be broadly divided into three families. The first is to symmetrise the tensor to obtain a genuine Cauchy material, at the cost of reducing cloaking to an approximate effect [12, 3]. The second to reproduce the broken minor symmetry with a purpose-built lattice whose ordinary spring-and-mass elements, endowed with distributed restoring torques, assemble into a macroscopically polar

(Cosserat) medium [13]. The third to select orthotropic Cauchy cells from a precomputed database, as done for quasi-static mechanical cloaks [14]. For Rayleigh waves specifically, Chatzopoulos et al. [15] compared triangular and semi-circular carpet cloaks and symmetrised their tensors by the arithmetic mean, reporting the symmetrised quadratic semi-circular design as the best performing. The triangular cloak is especially attractive because its piecewise-affine transformation has a constant Jacobian within each half of the cloak. Consequently, the required effective material properties are homogeneous within each region.

Our approach to finding a design inside the Cauchy class of ordinary materials is a differentiable pipeline built on a JAX-FEM solver [16] that evaluates a wave-field cloaking objective, with gradients flowing end-to-end through the FEM adjoint. We optimise at a single frequency and across a target band. This improves substantially on the symmetrised designs of Chatzopoulos et al. [15]. The neural field acts as an implicit material representation, of the kind used for scene reconstruction in computer vision [17, 18, 19]. Reparameterising a design field by a neural network and optimising it through a differentiable solver has been used extensively in structural topology optimisation, with convolutional [20] and coordinate-based, mesh-free networks [21, 22]. Those methods minimise static compliance over a scalar density field; here the network instead outputs an anisotropic stiffness tensor and density and is trained against a frequency-domain elastodynamic cloaking objective, so as to approximate the non-symmetric transformation-elasticity material.

We first use the pipeline to search for the best single realisable material **characterised by or with?** the orthotropic Cauchy moduli ($C_{11}, C_{12}, C_{22}, C_{66}$) that most closely reproduce the ideal response, rather than fixing them by symmetrisation. To improve on it while staying realisable, we then discretise the cloak into a regular grid of cells and let a coordinate-based neural field assign each cell its own Cauchy moduli and density. We then take the design one step further, to an explicit realisation. Each cell is filled with a two-phase (solid/void) microstructure drawn from a database of homogenised unit cells [23]; the cells share a single common base material and differ only in their internal geometry, so the whole cloak can be manufactured from one constituent by varying the pattern from cell to cell. To best of our knowledge no previous study has demonstrated a Rayleigh-wave elastodynamic cloak realised this way from a common material: earlier work either stops at effective symmetrised tensors [15], or reproduces the exact polar tensor only in principle with a special lattice, exact only for a circular cloak in the infinite-cell

limit [13]. We report both the gains of the microstructured cloak and the fraction of the ideal performance that survives homogenisation.

The paper is organised as follows. Section 2 sets up the half-space problem, the BGM push-forward for the triangular carpet, the cell discretisation, and the JAX-FEM solver and metrics. Section 3 introduces the neural-field design pipeline. Section 4 reports the single-frequency results against the ideal and symmetrised baselines and extends the design to a broadband objective. Section 5 constrains the cloak to realisable microstructures and validates the single-material realisation. Section 6 discusses the results and their limitations, and Section 7 concludes.

2. Problem setup and FEM baseline

2.1. Governing equations

We consider a homogeneous isotropic half-space with material properties (λ, μ, ρ) , where λ and μ are the Lamé coefficients and ρ the mass density, and spatial coordinates $\mathbf{X} = (X_1, X_2)$ for the reference domain, with the free surface on $X_2 = 0$. For in-plane surface waves, i.e. Rayleigh waves, propagating along the horizontal X_1 direction, the governing Navier elastodynamic equation takes the following form

$$\nabla_X \cdot (\mathbf{C} : \nabla_X \mathbf{U}) = \rho \mathbf{U}_{tt}, \quad (1)$$

where $\mathbf{C}$ is the isotropic fourth-order elasticity tensor, $\mathbf{U} = (U_1, U_2)$ is the in-plane displacement, and $\mathbf{U}_{tt}$ denotes its second time derivative. Under the assumption of plane-strain elasticity, the elastic tensor can be written in Voigt notation $\{1, 2, 6\} = \{11, 22, 12\}$ as

$$C_{IJ} = \begin{bmatrix} \lambda+2\mu & \lambda & 0 \\ \lambda & \lambda+2\mu & 0 \\ 0 & 0 & \mu \end{bmatrix}, \quad I, J = 1, 2, 6. \quad (2)$$

We apply a pointwise invertible transformation Ξ that maps the reference configuration (virtual domain) $\mathbf{X} \in \Psi$ to the deformed region (physical domain) $\mathbf{x} = \Xi(\mathbf{X}) \in \psi$ and the remaining domain to itself. Given $\mathbf{x} = (x_1, x_2)$ the coordinates of the physical domain, the transformation gradient and its determinant are

$$\mathbf{F} = \nabla_X \mathbf{x} = \begin{pmatrix} \frac{\partial x_1}{\partial X_1} & \frac{\partial x_1}{\partial X_2} \\ \frac{\partial x_2}{\partial X_1} & \frac{\partial x_2}{\partial X_2} \end{pmatrix}, \quad J = \det(\mathbf{F}). \quad (3)$$

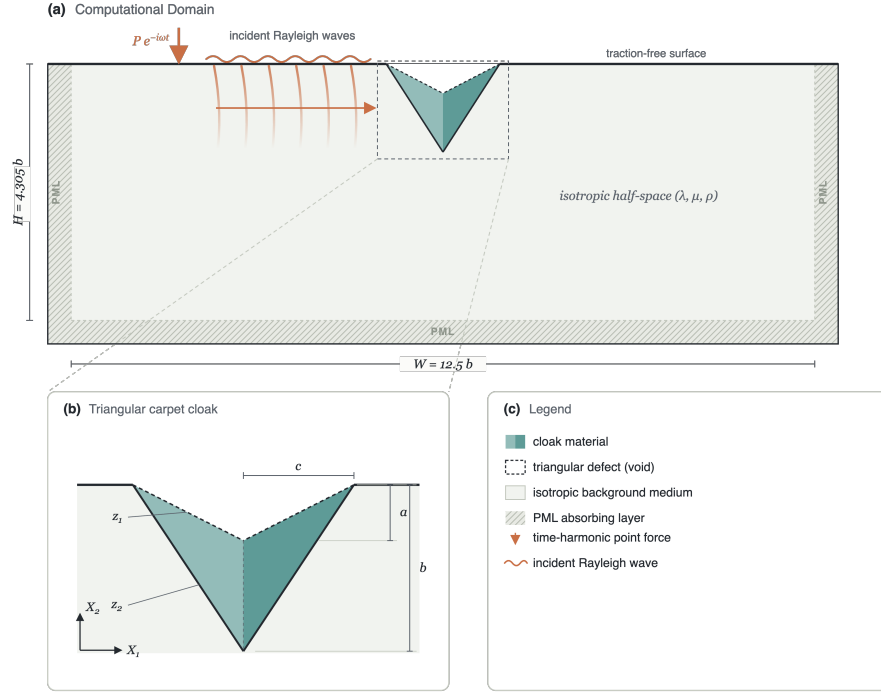


Figure 1: Problem configuration. **(a)** Computational domain: an isotropic elastic half-space (λ, μ, ρ) of width $W = 12.5b$ is truncated by Perfectly Matched Layers (PML) on the lateral and bottom boundaries; the top surface is traction-free. A time-harmonic vertical point force (red arrow) applied upstream generates Rayleigh waves (orange wavefronts) that propagate towards the triangular cloak (teal). **(b)** Cloak geometry: the surface notch (void) has depth a and half-width c ; the outer cloak boundary sits at depth $b = 3a$. Dashed lines mark the inner and outer triangle boundaries $z_1(X_1)$ and $z_2(X_1)$; the two mirror phases of the cloak are shaded in teal.

Equation (1) is not form-invariant under an arbitrary transformation Ξ [1]: the transformed material class depends on the gauge $\mathbf{U}(\Xi(\mathbf{X})) = \mathbf{A} \mathbf{u}(\mathbf{x})$ linking the virtual and physical displacements, with $\mathbf{A}$ a non-singular matrix. The choice $\mathbf{A} = \mathbf{F}$ leads to the Willis setting, which guarantees a symmetric stress tensor but requires two additional third-order coupling tensors and a tensorial mass density [1, 3, 24], physically replicable only within narrow frequency bands by resonant microstructures. For this reason we adopt the Cosserat setting $\mathbf{A} = \mathbf{I}$, following Norris and Shuvalov [3] and Brun et al. [2], for which the governing equation in the physical domain retains the Navier form

$$\nabla_x \cdot (\mathbf{c}^{\text{eff}} : \nabla_x \mathbf{u}) = \rho^{\text{eff}} \mathbf{u}_{tt}, \quad (4)$$

with the transformed mechanical parameters given by the BGM transformation relations

$$c_{ijkl}^{\text{eff}} = J^{-1} C_{IjKl} F_{iI} F_{kK}, \quad \rho^{\text{eff}} = \rho J^{-1}. \quad (5)$$

The transformed tensor preserves the major symmetries ($c_{ijkl}^{\text{eff}} = c_{klij}^{\text{eff}}$) but not the minor ones,

$$c_{ijkl}^{\text{eff}} \neq c_{jikl}^{\text{eff}} \neq c_{ijlk}^{\text{eff}} \neq c_{jilk}^{\text{eff}}, \quad (6)$$

except for special cases such as conformal transformations. The medium is nonetheless described by a single fourth-order, non-symmetric inhomogeneous elastic tensor with scalar density: the stress $\sigma_{ij} = c_{ijkl}^{\text{eff}} \partial u_k / \partial x_l$ acts on the *full* displacement gradient not the symmetric strain and is itself non-symmetric (polar medium). All computations below are carried out in the frequency domain with the time-harmonic convention $\mathbf{u}(\mathbf{x}, t) = \text{Re}[\mathbf{u}(\mathbf{x}) e^{-i\omega t}]$.

2.2. Transformation elasticity for the triangular carpet cloak

The cloak follows the pinched-carpet construction of Chatzopoulos et al. [15]. With the free surface on $X_2 = 0$ and the cloak centred at $X_1 = 0$, the inner (defect) and outer cloak boundaries are the triangles

$$z_1(X_1) = \frac{a}{c} |X_1| - a, \quad z_2(X_1) = \frac{b}{c} |X_1| - b, \quad (7)$$

where a is the defect depth, b the cloak depth, and c the surface half-width. The shear map

$$x_1 = X_1, \quad x_2 = \frac{z_2(X_1) - z_1(X_1)}{z_2(X_1)} X_2 + z_1(X_1) \quad (8)$$

compresses the triangular region above z_2 onto the cloak region between z_1 and z_2 , opening the notch. Its gradient is piecewise constant,

$$\mathbf{F} = \begin{bmatrix} 1 & 0 \\ F_{21} & F_{22} \end{bmatrix}, \quad F_{21} = \text{sign}(X_1) \frac{a}{c}, \quad F_{22} = \frac{b-a}{b} = J. \quad (9)$$

For an isotropic background (λ, μ) the BGM push-forward (5) then yields, in augmented Voigt ordering $[\sigma_{11}, \sigma_{22}, \sigma_{12}, \sigma_{21}]$, the effective stiffness

$$\mathbf{c}_{\text{eff}} = \begin{bmatrix} \frac{2\mu+\lambda}{F_{22}} & \lambda & 0 & \frac{F_{21}}{F_{22}}(2\mu+\lambda) \\ \lambda & \frac{F_{21}^2\mu + F_{22}^2(2\mu+\lambda)}{F_{22}} & \frac{F_{21}}{F_{22}}\mu & F_{21}(\lambda+\mu) \\ 0 & \frac{F_{21}}{F_{22}}\mu & \frac{\mu}{F_{22}} & \mu \\ \frac{F_{21}}{F_{22}}(2\mu+\lambda) & F_{21}(\lambda+\mu) & \mu & \frac{F_{21}^2(2\mu+\lambda) + F_{22}^2\mu}{F_{22}} \end{bmatrix}, \quad (10)$$

together with the constant effective density

$$\rho^{\text{eff}} = \frac{\rho}{J} = \frac{b}{b-a} \rho. \quad (11)$$

Unlike radial blow-up cloaks, whose tensors are singular at the inner boundary, the triangular tensor is non-singular and uniform within each half of the cloak (the shear F_{21} changes sign across the centreline $X_1 = 0$), so the ideal cloak consists of just two mirror-image material phases. The price is that *three* minor symmetry pairs are broken independently ($c_{11,12} \neq c_{11,21}$, $c_{22,12} \neq c_{22,21}$, $c_{12,12} \neq c_{21,21}$), and these are the entries that symmetrisation strategies average away by hand.

2.3. Realisable Cauchy parameterisation

Throughout this paper the designed cloak is parameterised by four free orthotropic Cauchy moduli $(C_{11}, C_{12}, C_{22}, C_{66})$ (4CM) and a scalar density, obtained by direct numerical search through the differentiable FEM. This class is dictated by the microstructures that must ultimately realise the cloak: square two-phase unit cells invariant under the point group D_2 , whose two edge-aligned mirror axes fix the form of the homogenised stiffness. Writing the plane-strain law in Voigt notation $\{1, 2, 6\} = \{11, 22, 12\}$, a general

symmetric Cauchy tensor has six independent constants,

$$\begin{bmatrix} \sigma_{11} \\ \sigma_{22} \\ \sigma_{12} \end{bmatrix} = \begin{bmatrix} C_{11} & C_{12} & C_{16} \\ C_{12} & C_{22} & C_{26} \\ C_{16} & C_{26} & C_{66} \end{bmatrix} \begin{bmatrix} \varepsilon_{11} \\ \varepsilon_{22} \\ 2\varepsilon_{12} \end{bmatrix}. \quad (12)$$

Reflection across the edge, $(x_1, x_2) \mapsto (x_1, -x_2)$, leaves the normal strains unchanged but reverses the sign of the shear strain. Mirror symmetry therefore eliminates coupling between normal and shear deformation, requiring $C_{16} = C_{26} = 0$. The stiffness tensor consequently takes the block-diagonal orthotropic form

$$\mathbf{C}_{4\text{CM}} = \begin{bmatrix} C_{11} & C_{12} & 0 \\ C_{12} & C_{22} & 0 \\ 0 & 0 & C_{66} \end{bmatrix}, \quad (13)$$

whose four moduli are exactly the per-cell design variables.

2.4. Cell discretisation

We discretise the cloak region into a regular Cartesian grid of $n_x \times n_y$ square cells (Fig. 2). Cells whose centre lies between the inner and outer triangles (7) are assigned a piecewise-constant effective stiffness and the density (11). Because the triangular transformation is affine in Cartesian coordinates, the tensor (10) is passed to the FEM solver without any rotation to a local frame.

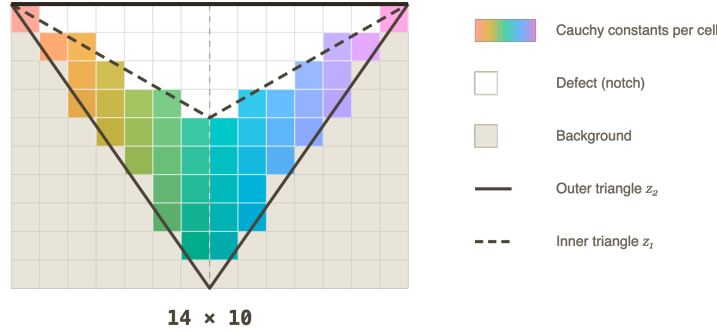


Figure 2: Cartesian cell decomposition of the triangular cloak at the 14×10 resolution used in all single-frequency experiments. Coloured cells carry per-cell Cauchy constants $(C_{11}, C_{12}, C_{22}, C_{66}, \rho)$; white cells lie inside the defect (void notch); grey cells are background. The solid line is the outer cloak boundary z_2 and the dashed line is the inner boundary z_1 .

2.5. Simulation domain and FEM solver

We consider a rectangular computational domain of width $W = 12.5b$ and depth $H = 4.305b$, truncating the half-space. The top boundary is traction-free; Perfectly Matched Layers (reflectionless absorbing layers) terminate the two lateral boundaries and the bottom. A triangular surface notch of depth $a = 0.0774H$ and half-width $c = 0.1545H$ is centred on the free surface, coated by a cloak of depth $b = 3a$. The background medium is soil, modelled as an isotropic elastic half-space with $\rho = 1600 \text{ kg/m}^3$, shear speed $c_s = 300 \text{ m/s}$, and $c_p = \sqrt{3}c_s$ ($\nu = 1/4$, $\lambda = \mu = 144 \text{ MPa}$, plane strain). The excitation is a time-harmonic vertical point force applied on the free surface upstream of the cloak, generating Rayleigh waves that propagate along the surface towards the defect. Frequencies are reported in the dimensionless form $f^* = fb/c_R$, where $c_R \approx 0.92c_s$ is the Rayleigh wave speed of the background: at $f^* = 1$ the Rayleigh wavelength equals the cloak depth b . The nominal design frequency is $f^* = 2$.

The frequency-domain elastodynamic equations are solved with complex-valued degrees of freedom and Rayleigh-damping PML through a JAX-FEM finite-element solver [16] on a triangular mesh with distance-based refinement near the cloak boundaries ($\sim 246,000$ elements, $\sim 124,000$ nodes). The entire pipeline from cell material parameters through assembly and sparse solve to the cloaking loss is differentiable via implicit adjoint differentiation through the linear FEM solve, enabling gradient-based optimisation of the per-cell stiffness and density.

3. Neural-field design pipeline

3.1. Coordinate-conditioned material network

We reparameterise the cloak material field through a coordinate-based multilayer perceptron (MLP)

$$\Phi_\theta: (x, y) \mapsto (\mathbf{C}_{4\text{CM}}(x, y), \rho(x, y)), \quad (14)$$

where θ denotes the network weights, $\mathbf{C}_{4\text{CM}} \in \mathbb{R}^4$ contains the four independent Cauchy moduli ($\mathbf{C}_{4\text{CM}}$ the design variables directly searched by the optimiser and $\rho > 0$ is scalar density). These five quantities constitute the material design variables predicted by the network. The network is evaluated at each cloak-cell centre to produce the piecewise-constant material assignment that is then expanded to the FEM quadrature points. A four-layer MLP

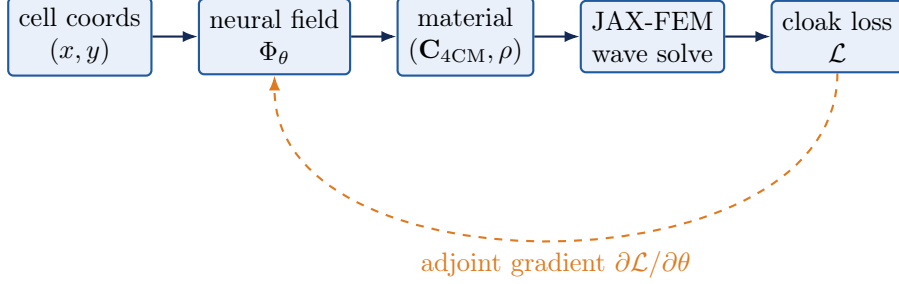


Figure 3: Neural-field design pipeline. Cell-centre coordinates are mapped through a Fourier positional encoding into a four-layer MLP that predicts the four free Cauchy moduli ($\mathbf{C}_{4\text{CM}}$) and the density. The piecewise-constant material assignment is expanded to the FEM quadrature points and the cloaking objective is differentiated back through the implicit JAX-FEM adjoint into the network weights.

with 256 hidden units ($\sim 200,000$ weights) is used in all experiments; we adopt tanh activations and the Fourier positional encoding of Tancik et al. [19] so that the network can represent sharp material transitions near the cloak boundaries. Figure 3 shows the architecture and the data flow through the differentiable FEM. For Optimisation prior we tried two choices for the starting point for the four Cauchy moduli: the arithmetic-mean symmetrisation of the ideal tensor (10) and the mean of the microstructure dataset and found no statistically significant difference in the converged results, indicating that the design is driven by the cloaking objective rather than by the initialisation.

3.2. Physical admissibility of the material output

In our approach nothing by itself guarantees a realisable material; the MLP can drive a stiffness negative, break the positive-definiteness of the Cauchy tensor, or reach an anisotropy ratio no real microstructure can realise. Rather than police these violations with penalty terms after the fact, we build them into the decoding, so that every network output is a physically admissible material by construction.

The network still emits four unbounded raw channels $\mathbf{r} = (r_{11}, r_{22}, r_{66}, r_{12}) = \Phi_{\theta}^{(C)}(x, y)$ per cloak cell, but these are mapped to the moduli through three guarantees.

(i) *Positive diagonal and shear.* The three positive-definite entries are set

by a log-space (hence strictly positive) multiplicative residual,

$$C_{ii} = C_{ii}^{(0)} \exp(\epsilon r_{ii}), \quad ii \in \{11, 22, 66\}, \quad (15)$$

which keeps them positive for any real r_{ii} and recovers $C_{ii}^{(0)}$ at $\mathbf{r} = \mathbf{0}$.

(ii) *Bounded anisotropy.* To exclude ratios beyond what the microstructure can attain, the diagonal ratio C_{11}/C_{22} is confined to $[1/R, R]$ while its geometric mean $\sqrt{C_{11}C_{22}}$ is held fixed. Writing $g = \frac{1}{2} \log(C_{11}/C_{22})$, a tanh squash on the half-log ratio,

$$g_b = \frac{1}{2} \log R \tanh\left(\frac{g}{\frac{1}{2} \log R}\right), \quad C_{11}, C_{22} = \sqrt{C_{11}C_{22}} e^{\pm g_b}, \quad (16)$$

bounds the ratio smoothly to $[1/R, R]$ with R the anisotropy cap (we use $R = 30$, chosen above the 99th percentile of the microstructure dataset with margin).

(iii) *Positive-definite coupling.* The off-diagonal C_{12} is written through a correlation coefficient $\rho_c \in (-\kappa, \kappa)$ rather than directly,

$$C_{12} = \rho_c \sqrt{C_{11}C_{22}}, \quad \rho_c = \kappa \tanh(r_{12} + \phi_0), \quad (17)$$

with $\kappa < 1$ (we use $\kappa = 0.99$). Because $|\rho_c| < \kappa < 1$, the orthotropic block stays strictly positive-definite, $\det = C_{11}C_{22}(1 - \rho_c^2) > 0$, for any r_{12} , and C_{12} is free to change sign. The offset $\phi_0 = \text{arctanh}(\rho_c^{(0)}/\kappa)$ centres the map so that $\mathbf{r} = \mathbf{0}$ again recovers the initial coupling $C_{12}^{(0)}$. Non-cloak cells bypass the decoding and keep their background values exactly.

Together, (15)–(17) turn the raw network outputs into a smooth, everywhere-differentiable map onto the set of positive-definite, bounded-anisotropy Cauchy tensors.

3.3. Loss function

The optimisation minimises a *magnitude-band integral*: the mean-squared relative error of the displacement magnitude over a strip of depth $d = 0.5b$ (half the cloak depth) below the free surface, downstream of and excluding the cloak/defect footprint,

$$\mathcal{L}_{\text{cloak}}(\theta) = \frac{1}{|\mathcal{B}|} \int_{\mathcal{B}} \left(\frac{|\mathbf{u}_{\text{cloak}}|}{|\mathbf{u}_{\text{ref}}|} - 1 \right)^2 dA, \quad (18a)$$

$$\mathcal{B} = \{(x, y) \in \Omega_{\text{phys}} \setminus \bar{\Omega}_{\text{cloak}} : y_{\text{top}} - d \leq y \leq y_{\text{top}}, x > x_c\}. \quad (18b)$$

where $\mathbf{u}_{\text{cloak}}$ and $\mathbf{u}_{\text{ref}}$ are the cloaked and defect-free reference fields and x_c is the downstream edge of the cloak. Comparing magnitudes rather than the complex fields themselves makes the objective phase-invariant, which is deliberate here: a wave that is diverted around the defect follows a slightly longer path and arrives with a small phase lag relative to the flat-surface reference. An explicit neighbour-smoothness term used in raw-parameter baselines [14] is unnecessary here: the neural field is spatially continuous by construction, and its smoothness is controlled directly through the number and bandwidth of the Fourier positional features [19].

While (18) is what the optimiser minimises, performance is *reported* through the dimensionless *cloak ratio*

$$\eta = \frac{\langle |\mathbf{u}| \rangle}{\langle |\mathbf{u}_{\text{ref}}| \rangle} \quad (19)$$

of the mean surface-displacement magnitude on the free surface beyond the cloak footprint to that of the defect-free reference, following Chatzopoulos et al. [15], so that $\eta \rightarrow 1$ is perfect cloaking.

4. Results

Unless stated otherwise, results are reported at the design frequency $f^* = 2.0$ through the cloak ratio (19). We build up the design in steps of increasing material freedom from a single homogeneous realisable material to a full cell grid (Secs. 4.1–4.3) then widen the objective from one frequency to a band (Sec. 4.4) and verify that the resulting medium is physically admissible (Sec. 4.5).

4.1. How many distinct materials does the cloak need?

We first ask how far a *single* realisable material can go. Both cloak phases are collapsed onto one orthotropic 4CM tile (a 1×1 cell filling the whole cloak) whose four Cauchy moduli ($\mathbf{C}_{4\text{CM}}$) and density are optimised through the differentiable FEM at $f^* = 2.0$. The natural point of comparison is the closed-form arithmetic-mean symmetrisation of Chatzopoulos et al. [15], instantiated and solved on the same mesh. That baseline is in fact richer than the tile it is compared against: averaging each broken pair to its mean (rather than annihilating it) keeps the normal–shear coupling (C_{16}, C_{26}), so the symmetrised medium is a *fully anisotropic* 6CM Cauchy material, and, since F_{21} only changes sign across the centreline, it is *two* such mirror phases.

The single 4CM tile thus competes from strictly less freedom: one orthotropic tensor against two anisotropic ones.

Table 1 reports the outcome. The symmetrised tensor recovers only $\eta = 0.63$ and distorts the near field more than the bare notch, whereas a single optimised orthotropic tile reaches $\eta = 0.86$ a substantial move towards the ideal continuous polar cloak ($\eta = 0.999$) from a smaller material class and half the materials, and clear evidence that optimising inside the Cauchy class outperforms symmetrisation.^c The advantage is concentrated around the design frequency, as expected for a single-frequency optimisation. Matching the baseline’s own 6CM class and material count two optimised tiles, one per half makes the comparison like-for-like and lifts this to $\eta = 0.947$.

The 6CM design is included only for a comparison with the symmetrisation baseline. It is not realisable by the D_2 -symmetric square cells of Sec. 5, so the rest of the paper focuses on the 4CM class that the microstructure catalogue can actually build.

Table 1: Single-frequency cloak ratio η at $f^\star = 2.0$ for homogeneous Cauchy materials filling the cloak. 4CM is the orthotropic class (13); 6CM additionally admits the normal-shear coupling (C_{16}, C_{26}). A single optimised 4CM tile beats the symmetrisation of Chatzopoulos et al. [15] from a smaller class and half the materials; matching symmetrisation’s own class and material count (two 6CM tiles, one per half of the cloak) reaches $\eta = 0.947$. All optimised rows share the mesh, source, loss and design frequency. Neither 6CM row is realisable with the D_2 square cells of Sec. 5 (see text).

Configuration	Materials	Class	η
Symmetrised ideal (Chatzopoulos)	2	6CM	0.634
Single optimised material (1×1)	1	4CM	0.857
Optimised left/right pair (2×1)	2	6CM	0.947
Ideal continuous $\mathbf{c}_{\text{eff}}$ (polar)	2	polar	0.999

Giving each phase more freedom closes most of the remaining gap. Splitting the cloak into a coarse $n_x \times n_y$ grid of independent orthotropic tiles and optimising all of them jointly, we find that even a 2×2 decomposition just *four* realisable materials lifts the cloak ratio to $\eta = 0.962$, i.e. within 4% of a perfect cloak.

4.2. Grid selection

Refining the grid further, we selected the resolution by weighing cloaking performance against optimisation cost. Materials are assigned only to cells

whose centre falls between the inner and outer triangles (7), so an $n_x \times n_y$ grid uses far fewer than $n_x n_y$ materials. The 14×10 grid nominally spans 140 cells but places only 46 inside the cloak region; these 46 are the actual design variables. It proved optimal in this trade-off: cloaking is already converged at $\eta \approx 0.99$, while finer grids only multiply the solve cost without improving on it. We adopt 14×10 for all subsequent single-frequency work.

4.3. Near-perfect single-frequency cloaking

The adopted 14×10 design (46 optimised in-cloak materials) reaches $\eta = 0.990$, effectively closing the gap to the ideal continuous cloak. Figure 4 compares the real-displacement magnitude of the optimised cloak against three references on the same mesh: the defect-free reference, the uncloaked notch, and the ideal continuous polar $\mathbf{c}_{\text{eff}}$. The uncloaked notch back-scatters the incident Rayleigh wave and casts a clear shadow downstream; the optimised 14×10 cloak restores the surface wavefield to the reference, matching the ideal continuous cloak panel while using only realisable orthotropic Cauchy materials. The only visible residual is a slight phase shift of the optimised solution: Figure 5 zooms into the cloak region and shows that, whereas the ideal continuous cloak keeps its near-surface wavefronts phase-aligned with the reference, the optimised 14×10 cloak carries them $\approx 0.18\lambda$ ($\approx 65^\circ$) later. This phase lag is consistent with the phase-invariant magnitude loss (18): which constrains the displacement magnitude but does not penalise phase differences, leaving a constant phase offset the small extra path of a wave routed around the notch unpenalised. Figure 6 shows the corresponding optimised per-cell moduli ($C_{11}, C_{22}, C_{12}, C_{66}$) and density over the 46 cloak cells.

4.4. Broadband multifrequency optimisation

The designs above are optimised at one frequency and, being tuned to it, cloak well only in a narrow neighbourhood of $f^* = 2$: away from the design frequency the cloak ratio falls off markedly. Because the ideal triangular tensor (10) is frequency-independent and cloaks exactly at every frequency, this narrowness is a limitation of the single-frequency *objective*, not of the material class. We therefore train a single design against a band of frequencies at once.

The broadband loss is the average of the single-frequency magnitude-band

Surface-wave cloaking, 14x10 cells — $|\text{Re}(u)|$ ($f^* = 2.0$)

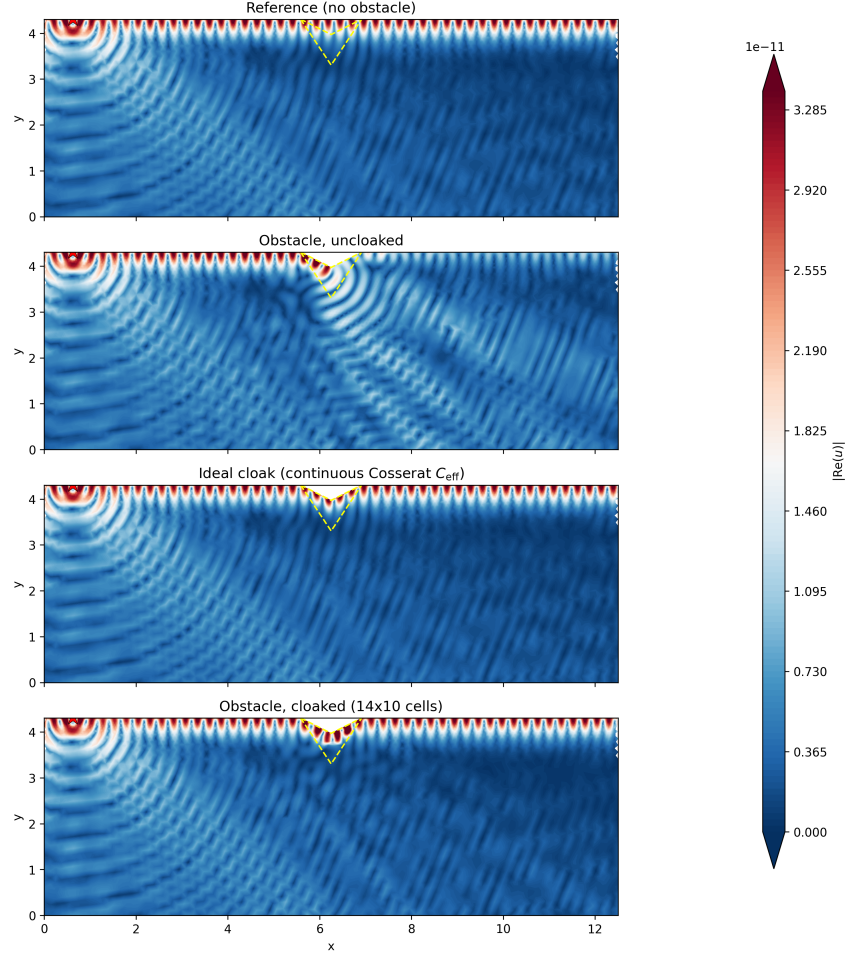


Figure 4: Real-displacement magnitude $|\text{Re} \mathbf{u}|$ at $f^* = 2.0$ (top to bottom): defect-free reference, uncloaked notch, ideal continuous polar cloak $\mathbf{c}_{\text{eff}}$, and the optimised 14×10 -cell cloak (46 in-cloak materials, $\eta = 0.990$). The optimised cloak reconstructs the reference wavefield on the transmission side and is visually indistinguishable from the ideal continuous cloak, with the downstream shadow of the uncloaked notch removed. Dashed lines mark the cloak/defect boundary.

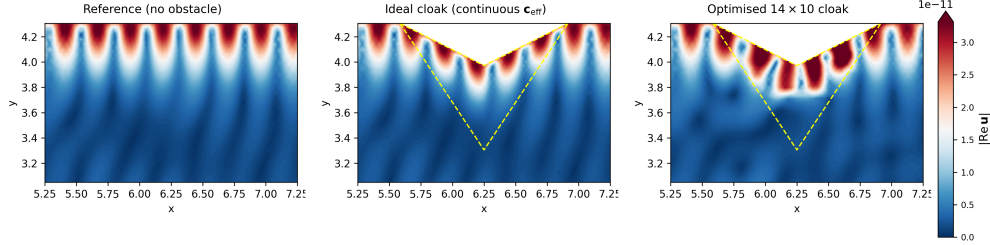


Figure 5: Zoom on the cloak region ($|\text{Re } \mathbf{u}|$ at $f^* = 2.0$, shared colour scale): defect-free reference (left), ideal continuous polar cloak (centre), and optimised 14×10 cloak (right); dashed lines outline the inner (defect) and outer cloak boundaries. All three reproduce the same amplitude envelope, but the optimised cloak leaves its near-surface wavefronts slightly phase-shifted ($\approx 0.18\lambda$, $\approx 65^\circ$) relative to the reference and the ideal cloak a constant phase offset left unconstrained by the phase-invariant magnitude loss, not a cloaking error.

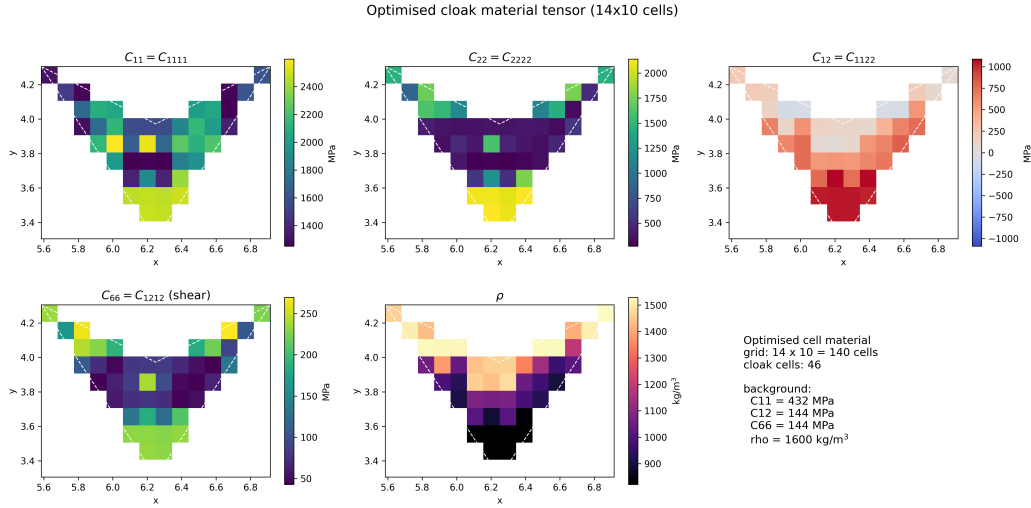


Figure 6: Optimised per-cell material of the 14×10 single-frequency cloak: the four orthotropic Cauchy moduli C_{11} , C_{22} , C_{12} , C_{66} and the density ρ over the 46 cells inside the cloak region (background cells masked). Only these 46 materials are optimised.

integral (18) over a finite set $\mathcal{S}$ of frequencies sampling the target band,

$$\mathcal{L}_{\text{band}}(\theta) = \frac{1}{\sum_{f \in \mathcal{S}} w_f} \sum_{f \in \mathcal{S}} w_f \mathcal{L}_{\text{cloak}}(\theta; f), \quad (20)$$

where $\mathcal{L}_{\text{cloak}}(\theta; f)$ is (18) evaluated at frequency f against the corresponding defect-free reference field $\mathbf{u}_{\text{ref}}(f)$. Equal weights $w_f = 1$ minimise the mean in-band distortion; the weights are free to emphasise particular frequencies, and a worst-case (min-max) variant that up-weights the currently least-cloaked frequency can be used to flatten the response across the band. A single neural field Φ_θ produces the shared per-cell material, so the same design is required to cloak at every $f \in \mathcal{S}$ simultaneously.

The objective (20) places no restriction on which band is targeted; the only cost is computational, since every optimisation step evaluates a forward and an adjoint FEM solve per frequency and the per-step cost therefore scales linearly with $|\mathcal{S}|$.

We optimise the same 14×10 design (46 in-cloak Cauchy materials) against the band $f^* \in [1, 3]$, sampled at seven uniformly spaced frequencies with equal weights, and evaluate the converged design on a dense sweep $f^* \in [0, 4]$ (Fig. 7). The single design holds $\eta = 0.92$ – 0.99 (mean 0.96) across the whole training band, where the uncloaked notch falls to $\eta \approx 0.31$, and degrades gracefully outside it ($\eta \approx 0.78$ at $f^* = 3.5$, ≈ 0.60 at $f^* = 4.0$). One realisable design therefore retains most of the single-frequency performance over an octave-plus band rather than at one frequency only.

4.5. Floquet–Bloch dispersion

As an independent diagnostic, we compute the Floquet–Bloch dispersion spectra of a unit cell comprising the entire triangular cloak cross-section shown in Fig. 1(b). The cell is Bloch-periodic along the surface direction x_1 , traction-free at the top, and clamped at the bottom and is evaluated directly on the production FEM mesh. Figure 8 presents the resulting dispersion spectra for the uncloaked reference cell, the analytical transformation cloak, and the optimised (14×10) neural-field cloak. Modes are classified using the inverse participation ratio (IPR)

$$\text{IPR} = |\psi^*| \frac{\sum_n A_n \|\mathbf{u}_n\|^4}{(\sum_n A_n \|\mathbf{u}_n\|^2)^2}, \quad \|\mathbf{u}_n\|^2 = |u_{1,n}|^2 + |u_{2,n}|^2. \quad (21)$$

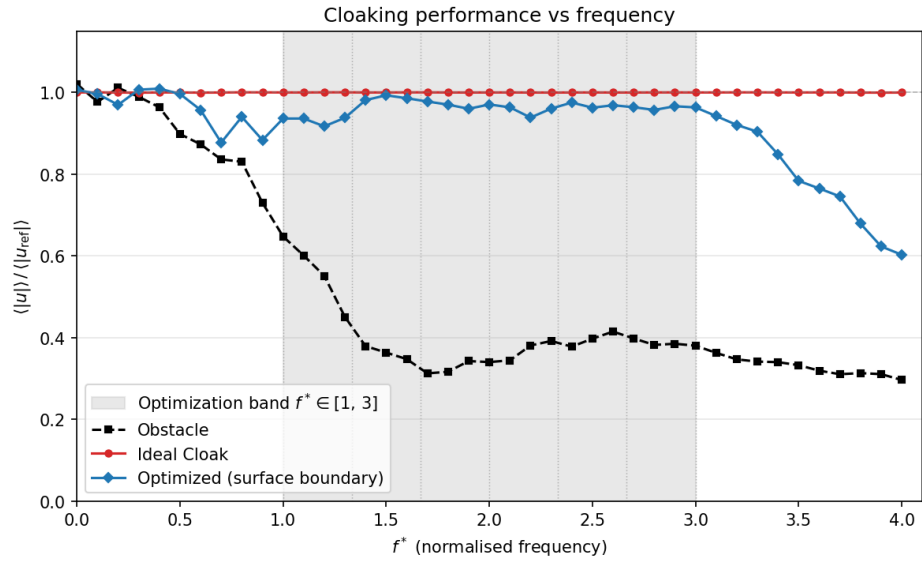


Figure 7: Frequency sweep of the cloak ratio $\eta = \langle |\mathbf{u}| \rangle / \langle |\mathbf{u}_{\text{ref}}| \rangle$ for the broadband 14×10 design trained on the band $f^* \in [1, 3]$ (shaded): the ideal continuous transformation cloak (red, $\eta \approx 1$ at every frequency), the uncloaked notch (black, dashed), and the broadband optimised cloak (blue). The optimised design holds $\eta \approx 0.96$ across the entire training band and degrades gracefully outside it.

where A_n is the nodal area and $|\psi^*| = \sum_n A_n$. Modes with $\text{IPR} \geq 2.5$ are identified as surface-localised and shown as large outlined markers, whereas the remaining bulk modes are shown as small dots. Marker colour represents the IPR. The analytical Rayleigh-wave branch, $f^* = \xi$, folded at each Brillouin-zone boundary, is included as a dashed reference line.

For each configuration, 50 Bloch wavenumbers and 400 eigenmodes were evaluated, giving 20,000 modes per configuration. Within the range $f^* \leq 2.5$, the numbers of surface-localised modes are 768, 725, and 816 for the reference, analytical-cloak, and optimised-cloak cells, respectively.

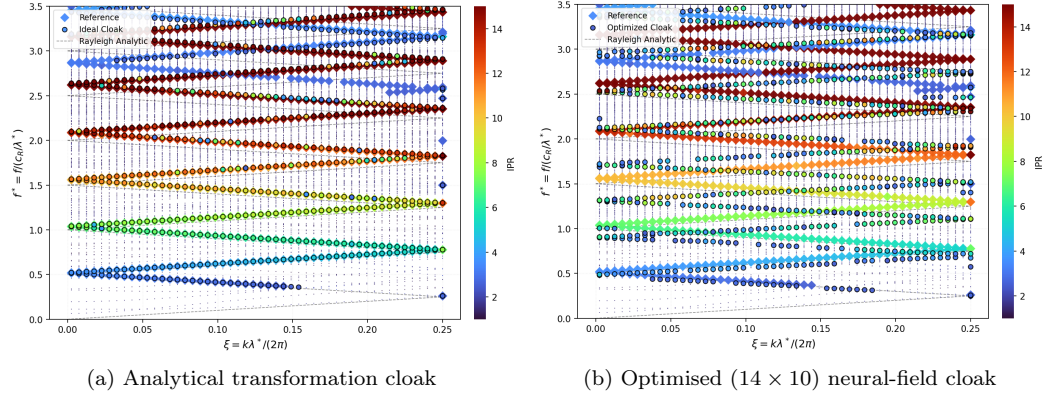


Figure 8: Floquet–Bloch dispersion diagrams for the full-cloak unit cell described above. In each panel, the uncloaked reference cell (diamonds) is compared with the corresponding cloak cell (circles with black outlines): **(a)** the analytical transformation cloak and **(b)** the optimised (14 × 10) neural-field cloak.

5. Microstructure-constrained realisation

The cloaks of Sec. 4.4 are tensor-valued: each cloak cell carries a homogenised $(\mathbf{C}_{4\text{CM}}, \rho)$ that need not correspond to any manufacturable object. We now close the loop to an explicit, single-material realisation, in which every cloak cell is filled with a two-phase solid/void microstructure whose homogenised stiffness reproduces the optimised target, so that the whole cloak can be built from one constituent by varying only the internal pattern from cell to cell. The solid phase is concrete, taken as isotropic with $E = 30$ GPa, $\nu = 0.2$ and $\rho = 2300$ kg/m³ (plane strain), and the second phase is void; the cloak is cast into the soil half-space of Sec. 2.5. We first constrain the neural-field optimisation to the manifold of realisable microstructures, then compare

inverse design and conditional diffusion generative methods for turning each per-cell target into an actual microstructure, and finally exhibit and validate the realised cloak.

5.1. Pipeline

Step 1 – Microstructure dataset. A catalogue of $N \sim 10^6$ binary 50×50 unit cells is generated by a squared-assembly cellular automaton on a concrete/void substrate, following the cellular-automaton generative approach of Nakarmi et al. [23], who assemble a large, topologically diverse library of mesostructures by evolving a pixel grid under neighbour-count birth/death and survival rules.

Step 2 – Homogenisation. Each unique cell is passed through standard asymptotic homogenisation under periodic boundary conditions [25, 26, 27], with the solid pixels carrying the concrete moduli above and the void pixels an ersatz stiffness $10^{-6}E$; the effective stiffness follows from the volume-averaged stress of the unit-cell problems, the periodic boundary conditions guaranteeing energetic consistency in the Hill–Mandel sense [28]. The cell problems are solved with the same JAX-FEM solver [16] as the macro problem. Because the squared-assembly cells are invariant under the point group D_2 , the homogenised tensor is exactly of the 4CM form (13) that is the design variable throughout the paper, so the descriptor carries the full (orthotropic) stiffness rather than an isotropic projection of it.

Step 3 – Realisability prior. A Gaussian mixture model (GMM) is fitted to the standardised $(\mathbf{C}_{4\text{CM}}, \rho)$ point cloud of the catalogue. Denoting the standardised material descriptor by $\mathbf{z} \in \mathbb{R}^5$, its probability density is

$$p_{\text{GMM}}(\mathbf{z}) = \sum_{k=1}^K \pi_k \mathcal{N}(\mathbf{z} \mid \boldsymbol{\mu}_k, \boldsymbol{\Sigma}_k), \quad \sum_{k=1}^K \pi_k = 1, \quad (22)$$

where K is the number of mixture components, π_k their weights, and $\boldsymbol{\mu}_k$ and $\boldsymbol{\Sigma}_k$ their means and covariance matrices, respectively [29]. The realisable manifold is then defined by a flat-top log-density threshold,

$$\mathcal{M} = \{\mathbf{z} : \log p_{\text{GMM}}(\mathbf{z}) \geq \tau\}, \quad \tau = Q_q\left(\{\log p_{\text{GMM}}(\mathbf{z}_n)\}_{n=1}^N\right), \quad (23)$$

where Q_q denotes the q -th empirical quantile over the catalogue.

Step 4 – Constrained optimisation. The neural field of Sec. 3 is trained with the manifold penalty

$$\mathcal{L}_{\text{GMM}} = \sum_c \max(0, \tau - \log p_{\text{GMM}}(\mathbf{C}_{4\text{CM},c}, \rho_c)), \quad (24)$$

added to the single-frequency or band cloak loss. The penalty pulls every cell into $\mathcal{M}$ without pinning it to a specific catalogue entry, while the positive-definiteness and bounded-anisotropy guarantees of Sec. 3.2 keep every intermediate design admissible. For the constrained runs we move from the 14×10 grid of Sec. 4.3 to a finer 20×15 grid which places exactly 100 cells inside the cloak in the expectation that the extra per-cell freedom would let the constrained optimisation reach a good realisable solution more easily.

Step 5 – Microstructure realisation. Each optimised per-cell target $(\mathbf{C}_{4\text{CM}}, \rho)$ is turned into an explicit 50×50 solid/void cell by one of the two generative methods of Sec. 5.2 (or a nearest-neighbour dataset baseline).

Step 6 – Evaluation. The macro FEM is re-solved with every cloak cell carrying the homogenised stiffness and density of its realised microstructure, and the cloak ratio η (19) is recomputed.

5.2. Two realisation methods

Both methods solve the same per-cell inverse problem – given a target orthotropic stiffness and density, produce a binary 50×50 cell whose homogenisation reproduces it – but approach it from opposite directions.

Inverse design (neural field). A coordinate network parameterises a continuous density field over the 50×50 cell. It is relaxed during training and driven to a binary pattern through a soft-to-hard schedule, with a connectivity penalty that suppresses disconnected concrete islands and floating voids. The cell’s periodic-FEM homogenised stiffness is differentiable in the network weights, so the pattern is optimised directly against the per-cell target error. The method is deterministic and returns a single, locally optimal cell for each target.

Diffusion (conditional generative). A conditional denoising diffusion model is trained on the catalogue to sample binary cells conditioned on a target $(\mathbf{C}_{4\text{CM}}, \rho)$, following the guided-diffusion inverse-design approach of Yang et al. [30]. Because sampling is stochastic, N candidates are drawn per

cell and the one whose homogenised stiffness is closest to the target is kept (*best-of- N*). The generative prior keeps every sample inside the manifold of manufacturable cells while exploring a diverse set of realisations for each target.

Figure 9 quantifies how well each method improves its per-cell target across the 100 cloak cells compared to the nearest-neighbour snap. Section 5.3 shows, however, this per-cell stiffness accuracy does not translate directly into whole-cloak performance.

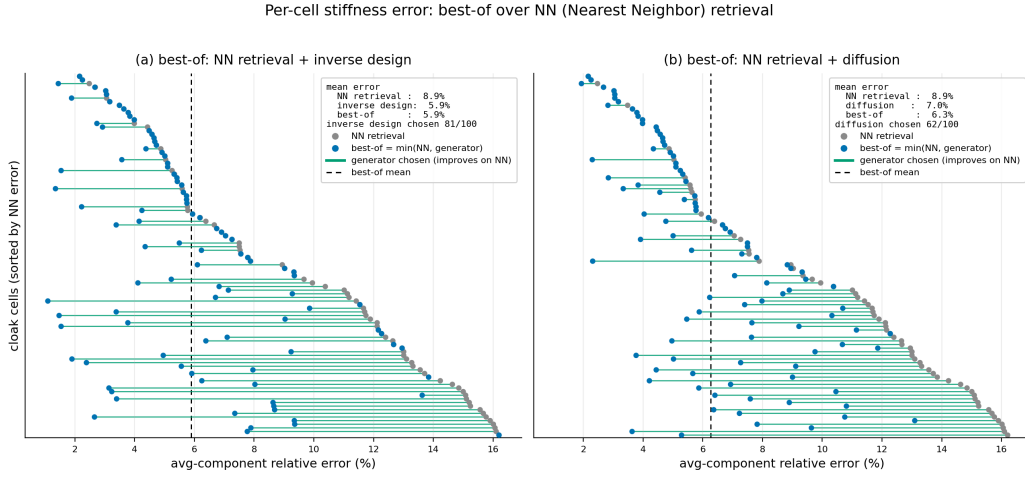


Figure 9: Per-cell stiffness-matching error over the 100 cloak cells for the two realisation methods against NN (Nearest Neighbor) retrieval: (a) NN + inverse design, (b) NN + diffusion. Each row is a cell; the bar links the NN error (grey) to the per-cell best-of selection (blue, the lower-error of the two). Best-of lowers the mean avg-component stiffness error from 8.9% to 5.9% (inverse) and 6.3% (diffusion); cells are sorted by NN error.

5.3. Results

Table 2 reports the cloak ratio at $f^* = 2.0$ on the 20×15 macro grid (100 cloak cells) for the three realisation strategies, each evaluated with the homogenised stiffness of the realised cells. The continuous 4CM optimum reaches $\eta = 0.99$; realising it with actual microstructures costs performance in proportion to how well each method hits its per-cell target. The nearest-neighbour dataset snap retains only $\eta = 0.82$, the neural-field inverse design lifts this to $\eta = 0.94$, and the best-of- N diffusion realisation recovers $\eta = 0.97$ — within 3% of the continuous optimum using only fabricable solid/void cells.

Table 2: Microstructure realisation of the constrained 20×15 cloak at $f^* = 2.0$ (100 cloak cells): cloak ratio η (homogenised, matched) for the three cell-realisation strategies, against the continuous 4CM optimum and the ideal polar cloak. Best-of- N diffusion recovers $\eta = 0.97$.

Realisation of the 100 cloak cells	η
Continuous 4CM optimum (homogenised, GMM-constrained)	0.990
Nearest-neighbour dataset match	0.816
Inverse design (neural field)	0.936
Diffusion (best-of-N)	0.967
Ideal continuous polar $\mathbf{c}_{\text{eff}}$	0.999

The advantage of the generative realisation is not confined to the design frequency. Figure 10 sweeps $\eta(f)$ across $f^* \in [1.5, 2.5]$ for the three methods on the matched homogenised cloak: diffusion holds $\eta \gtrsim 0.93$ over $f^* \in [1.8, 2.2]$ and has the smallest mean in-band distortion ($\langle |1 - \eta| \rangle = 0.13$, against 0.17 for inverse design and 0.25 for nearest neighbour), so better per-cell realisation improves the cloak across the whole band, not only at $f^* = 2$. We note that a greedy per-cell hybrid picking, for each cell independently, whichever of the two methods best matches that cell’s target does *not* beat diffusion ($\eta = 0.95$): minimising per-cell stiffness error is not the same as maximising whole-cloak cloaking, because the ratio couples the cells through the shared wave field.

5.4. Realised cloak and validation

Figure 11 shows the explicit solid/void realisation of the cloak: the 100 generated cells tiled at the macro-cell positions they occupy inside the triangular carpet, with the surface notch and the surrounding soil half-space. The whole cloak is a single concrete phase perforated by a cell-varying void pattern, densest near the outer boundary and most strongly perforated near the sheared defect tip, mirroring the depth variation of the ideal tensor (10).

In the homogenised model each unit cell is replaced by its effective stiffness tensor and density, so the cloak is a smoothly varying continuum in which the microstructure appears only through those constants. We then perform a FEM validation where the unit cells are placed into the cloak region at their physical size and mesh that geometry directly. The cement phase is discretised, with quadratic triangular elements, and the pores are cut out as

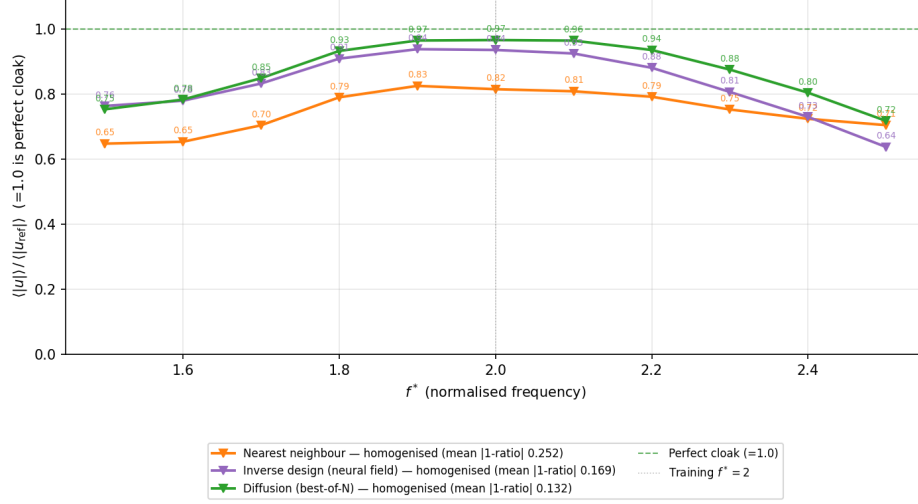


Figure 10: Frequency sweep of the cloak ratio $\eta(f) = \langle |\mathbf{u}| \rangle / \langle |\mathbf{u}_{\text{ref}}| \rangle$ for the three microstructure-realisation methods on the matched homogenised 20×15 cloak: nearest-neighbour dataset snap (orange), neural-field inverse design (purple), and best-of- N diffusion (green). Diffusion stays closest to the perfect-cloak line ($\eta = 1$) across the band and has the smallest mean distortion; the dashed line is the training frequency $f^* = 2$.

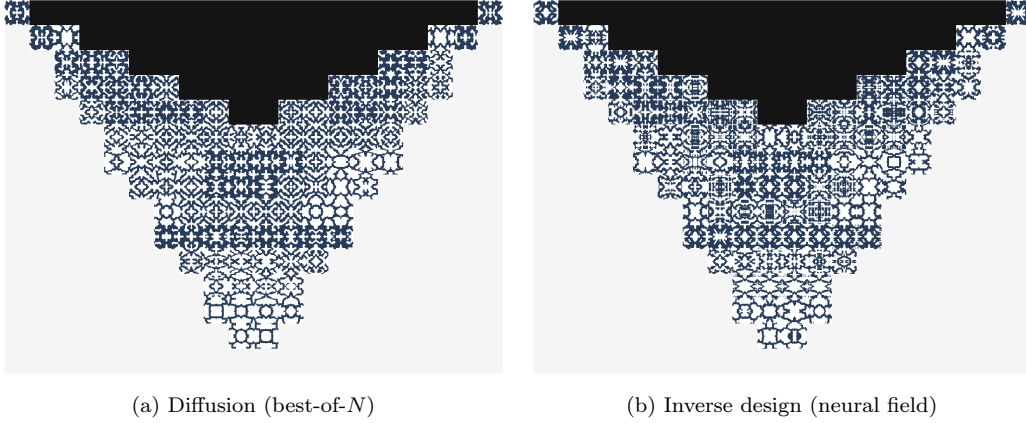


Figure 11: Explicit realisation of the triangular carpet cloak from a single concrete phase: the 100 generated 50×50 unit cells tiled at the macro-cell positions they occupy in the cloak. Concrete is dark, void white; the black inverted triangle is the surface notch and the light grey region is the surrounding soil half-space. (a) Best-of- N diffusion and (b) neural-field inverse design produce visibly different but equally manufacturable patterns for the same optimised per-cell targets.

traction-free holes. At the design frequency $f^* = 2.0$, the transmission ratio converges to 0.76.

6. Discussion

The three regimes above share a single architectural choice – a coordinate-conditioned neural field on top of a differentiable FEM – and they show, in different forms, the same advantage over hand-crafted symmetrisation strategies. In the single-frequency case the network finds a low-distortion realisable cloak by directly searching four orthotropic Cauchy moduli per cell; the broken minor symmetry belongs to the ideal polar tensor and represents the gap that any realisable Cauchy design (ours included) must approximate. In the multifrequency case the network’s implicit smoothness eliminates the spurious cell-to-cell oscillations that plague raw per-cell optimisation and the band objective flattens the loss across a wide target band. In the microstructure-constrained case the same network output is projected onto a realisability manifold and realised as an explicit single-material microstructure. This continuum-level performance largely survives realisation: the best-of- N diffusion cloak recovers $\eta = 0.97$ from fabricable single-material cells, with the small residual reflecting per-cell target-matching error rather than a hidden homogenisation gap, since the D_2 -invariant cells carry the full orthotropic (4CM) stiffness.

Future work. The same differentiable pipeline, coupling a neural field to a finite-element solver, applies to other Rayleigh-wave design problems beyond carpet cloaking, such as wave focusing, waveguiding, and vibration isolation, by changing only the objective. On the realisability side, we have already replaced the discrete database with a differentiable generative model of the realisable manifold, queried during optimisation; this model still generates one unit cell at a time, and producing a full multiscale image of the cloak, where neighbouring cells connect and vary smoothly across the domain, is an open problem that may again be a good fit for diffusion models. Two further extensions stand out. Moving from the two-dimensional carpet cloak to a three-dimensional cloak; the differentiable JAX-FEM pipeline carries over, but the cost of the full solve grows sharply. And designing beyond the four-parameter orthotropic Cauchy class: the ideal polar tensor breaks minor symmetry, so realising it needs Cosserat or polar microstructures and a different homogenisation method than the quasi-static Cauchy one used here.

7. Conclusion

We have presented a unified, differentiable design optimisation pipeline for 2D Rayleigh-wave carpet cloaks in which the per-cell material is parameterised by four free orthotropic Cauchy moduli ($C_{11}, C_{12}, C_{22}, C_{66}$) and a scalar density, searched by a coordinate-conditioned neural field through an end-to-end differentiable JAX-FEM pipeline. This is an alternative to closed-form arithmetic-mean symmetrisation of the ideal polar tensor that directly explores the realisable Cauchy design space. The pipeline achieves near-perfect cloaking and flattens the cloak loss across the target frequency band. In a subsequent step, we have compared diffusion and neural-field optimisation for projecting these continuum targets onto a realisability manifold, with diffusion performing better, and when the selected microstructures are represented only through their homogenised effective stiffness and density, the resulting cloak retains a high performance of approximately $\eta = 0.97$. Most importantly, direct FEM simulation of the fully resolved microstructured cloak still achieves approximately $\eta = 0.76$, demonstrating that a substantial cloaking effect survives the transition from effective continuum properties to an explicit single-material architecture. This provides a practical route towards physically realisable Rayleigh-wave cloaks and further multiscale optimisation of their dynamic performance.

References

- [1] G. W. Milton, M. Briane, J. R. Willis, On cloaking for elasticity and physical equations with a transformation invariant form, *New J. Phys.* 8 (2006) 248. doi:10.1088/1367-2630/8/10/248.
- [2] M. Brun, S. Guenneau, A. B. Movchan, Achieving control of in-plane elastic waves, *Appl. Phys. Lett.* 94 (2009) 061903. doi:10.1063/1.3068491.
- [3] A. N. Norris, A. L. Shuvalov, Elastic cloaking theory, *Wave Motion* 48 (2011) 525–538. doi:10.1016/j.wavemoti.2011.03.002.
- [4] A. Diatta, S. Guenneau, Controlling solid elastic waves with spherical cloaks, *Applied Physics Letters* 105 (2014).
- [5] J. B. Pendry, D. Schurig, D. R. Smith, Controlling electromagnetic fields, *Science* 312 (2006) 1780–1782. doi:10.1126/science.1125907.

- [6] J. Li, J. B. Pendry, Hiding under the carpet: a new strategy for cloaking, *Phys. Rev. Lett.* 101 (2008) 203901. doi:10.1103/PhysRevLett.101.203901.
- [7] T. Bückmann, M. Thiel, M. Kadic, R. Schittny, M. Wegener, An elastomechanical unfeelability cloak made of pentamode metamaterials, *Nature communications* 5 (2014) 4130.
- [8] T. Bückmann, M. Kadic, R. Schittny, M. Wegener, Mechanical cloak design by direct lattice transformation, *Proc. Natl. Acad. Sci. U.S.A.* 112 (2015) 4930–4934. doi:10.1073/pnas.1501240112.
- [9] M. Kadic, M. Wegener, A. Nicolet, F. Zolla, S. Guenneau, A. Diatta, Elastodynamic behavior of mechanical cloaks designed by direct lattice transformations, *Wave Motion* 92 (2020) 102419.
- [10] G. W. Milton, A. V. Cherkaev, Which elasticity tensors are realizable?, *J. Eng. Mater. Technol.* 117 (1995) 483–493. doi:10.1115/1.2804743.
- [11] D. E. Quadrelli, R. Craster, M. Kadic, F. Braghin, Elastic wave near-cloaking, *Extreme Mechanics Letters* 44 (2021) 101262.
- [12] A. N. Norris, Acoustic cloaking theory, *Proc. R. Soc. A* 464 (2008) 2411–2434. doi:10.1098/rspa.2008.0076.
- [13] H. Nassar, Y. Y. Chen, G. L. Huang, A degenerate polar lattice for cloaking in full two-dimensional elastodynamics and statics, *Proc. R. Soc. A* 474 (2018) 20180523. doi:10.1098/rspa.2018.0523.
- [14] L. Wang, J. Boddapati, K. Liu, P. Zhu, C. Daraio, W. Chen, Mechanical cloak via data-driven aperiodic metamaterial design, *Proc. Natl. Acad. Sci. U.S.A.* 119 (2022) e2122185119. doi:10.1073/pnas.2122185119.
- [15] Z. Chatzopoulos, A. Palermo, A. Diatta, S. Guenneau, A. Marzani, Cloaking Rayleigh waves via symmetrized elastic tensors, *Int. J. Eng. Sci.* 191 (2023) 103899. doi:10.1016/j.ijengsci.2023.103899.
- [16] T. Xue, S. Liao, Z. Gan, C. Park, X. Xie, W. K. Liu, J. Cao, JAX-FEM: A differentiable GPU-accelerated 3D finite element solver for automatic inverse design and mechanistic data science, *Comput. Phys. Commun.* 291 (2023) 108802. doi:10.1016/j.cpc.2023.108802.

- [17] B. Mildenhall, P. P. Srinivasan, M. Tancik, J. T. Barron, R. Ramamoorthi, R. Ng, NeRF: Representing scenes as neural radiance fields for view synthesis, *Communications of the ACM* 65 (2021) 99–106. doi:10.1145/3503250.
- [18] V. Sitzmann, J. N. P. Martel, A. W. Bergman, D. B. Lindell, G. Wetzstein, Implicit neural representations with periodic activation functions, in: *Advances in Neural Information Processing Systems (NeurIPS)*, 2020.
- [19] M. Tancik, P. P. Srinivasan, B. Mildenhall, S. Fridovich-Keil, N. Raghavan, U. Singhal, R. Ramamoorthi, J. T. Barron, R. Ng, Fourier features let networks learn high frequency functions in low dimensional domains, *Advances in Neural Information Processing Systems* 33 (2020) 7537–7547.
- [20] S. Hoyer, J. Sohl-Dickstein, S. Greydanus, Neural reparameterization improves structural optimization, *arXiv preprint arXiv:1909.04240* (2019).
- [21] A. Chandrasekhar, K. Suresh, TOuNN: Topology optimization using neural networks, *Struct. Multidiscip. Optim.* 63 (2021) 1135–1149. doi:10.1007/s00158-020-02748-4.
- [22] J. Zehnder, Y. Li, S. Coros, B. Thomaszewski, NTopo: Mesh-free topology optimization using implicit neural representations, in: *Advances in Neural Information Processing Systems (NeurIPS)*, volume 34, 2021.
- [23] S. Nakarmi, J. A. Leiding, K.-S. Lee, N. P. Daphalapurkar, Predicting non-linear stress-strain response of mesostructured cellular materials using supervised autoencoder, *Computer Methods in Applied Mechanics and Engineering* 432 (2024) 117372. doi:10.1016/j.cma.2024.117372.
- [24] J. R. Willis, Variational principles for dynamic problems for inhomogeneous elastic media, *Wave Motion* 3 (1981) 1–11. doi:10.1016/0165-2125(81)90008-1.
- [25] M. P. Bendsøe, N. Kikuchi, Generating optimal topologies in structural design using a homogenization method, *Comput. Methods Appl. Mech. Engrg.* 71 (1988) 197–224. doi:10.1016/0045-7825(88)90086-2.

- [26] B. Hassani, E. Hinton, A review of homogenization and topology optimization I – homogenization theory for media with periodic structure, *Comput. Struct.* 69 (1998) 707–717. doi:10.1016/S0045-7949(98)00131-X.
- [27] E. Andreassen, C. S. Andreasen, How to determine composite material properties using numerical homogenization, *Comput. Mater. Sci.* 83 (2014) 488–495. doi:10.1016/j.commatsci.2013.09.006.
- [28] R. Hill, Elastic properties of reinforced solids: Some theoretical principles, *J. Mech. Phys. Solids* 11 (1963) 357–372. doi:10.1016/0022-5096(63)90036-X.
- [29] G. J. McLachlan, D. Peel, *Finite Mixture Models*, John Wiley & Sons, 2000. doi:10.1002/0471721182.
- [30] Y. Yang, L. Wang, X. Zhai, K. Chen, W. Liu, M. Fang, T. Xu, A. Belyaev, C. C. L. Wang, L. Liu, Guided diffusion for fast inverse design of density-based mechanical metamaterials, *arXiv preprint arXiv:2401.13570* (2024).