

https://docs.powerdrives.net/products/f_series

APD F Series: 120F3[X] Datasheet

Version	1.5	Date	20th December 2021

Drawings

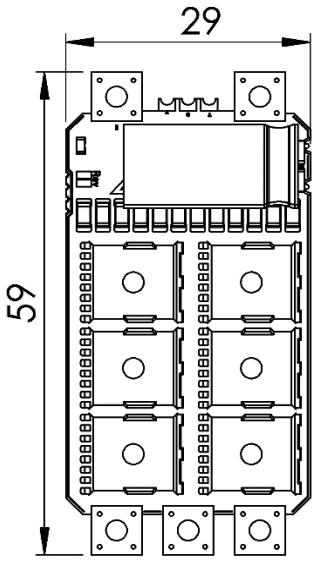

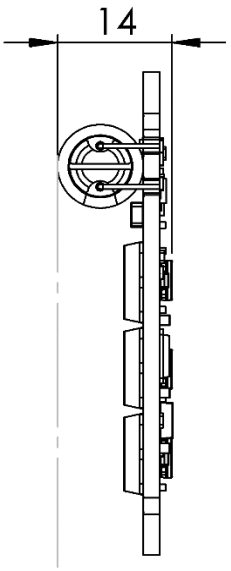

(MM)

NOT TO SCALE

Specification

Peak Power Rating (kW)	9	**Weight (No cables) (g)**	20
Continuous Current (A)	120	**Dimensions (mm)**	59 × 29 × 14
Continuous Rating Duration (s)	60	**ProShot Frequency Range (Auto Detection) (kBit/Sec)**	1000
Burst Current (A)	200	**DShot Frequency Range (Auto Detection) (kBit/Sec)**	300 to 1200
Burst Rating Time (s)	5	**PWM Pulse Frequency Range (Auto Detection) (Hz)**	50 to 499
Max Voltage (V)	50	**Auto Output PWM-Freq**	YES
Max ERPM	750,000	**Regenerative Braking**	YES
Input Resolution	10 bit	**Max Regen Current (A)**	12 (10% Max Current)
	0.1%	**Max Regen Voltage**	110% Power on Voltage
Max No. of LiPo Cells (S)	12	**Auto Timing Advance**	YES
Min Voltage (V)	15	**Stall and Desync Protection**	YES
Min S (LiPo)	4	**Configurator Tool**	NO
Min Operating Temperature (°C)	-20	**Data Logging (Black Box)**	NO
Max Operating Temperature (°C) (50% current limiter threshold)	115	**Bi-Directional Control**	NO
Recommended Airflow to achieve max power ratings (m/s)	33	**Micro USB Firmware Flashing**	NO
Decoupling Capacitor	1 X 330uF 50V (Not Attached)	**Country of Origin**	Australia
CAD Drawing https://docs.powerdrives.net/downloads/cad-downloads		**Quick Start Guide** https://docs.powerdrives.net/products/f-series-esc	