



USB-C PWR INPUT

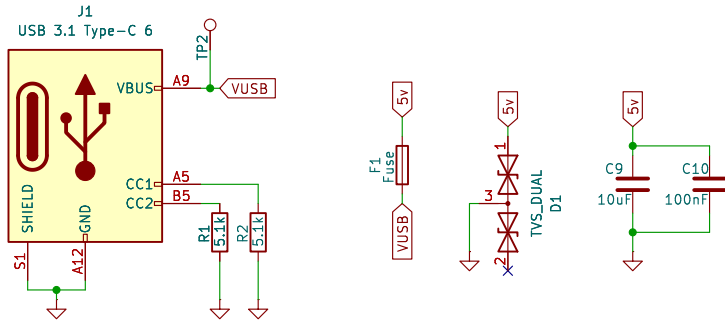


LDO 3V3

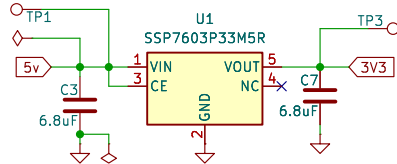


SWD & PWR_IND




DECOUPLING CAPACITOR

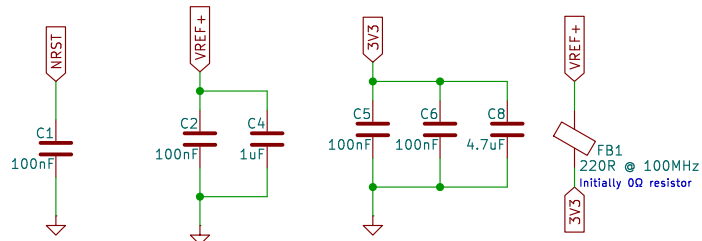


MCU - STM32G0B1CBT6

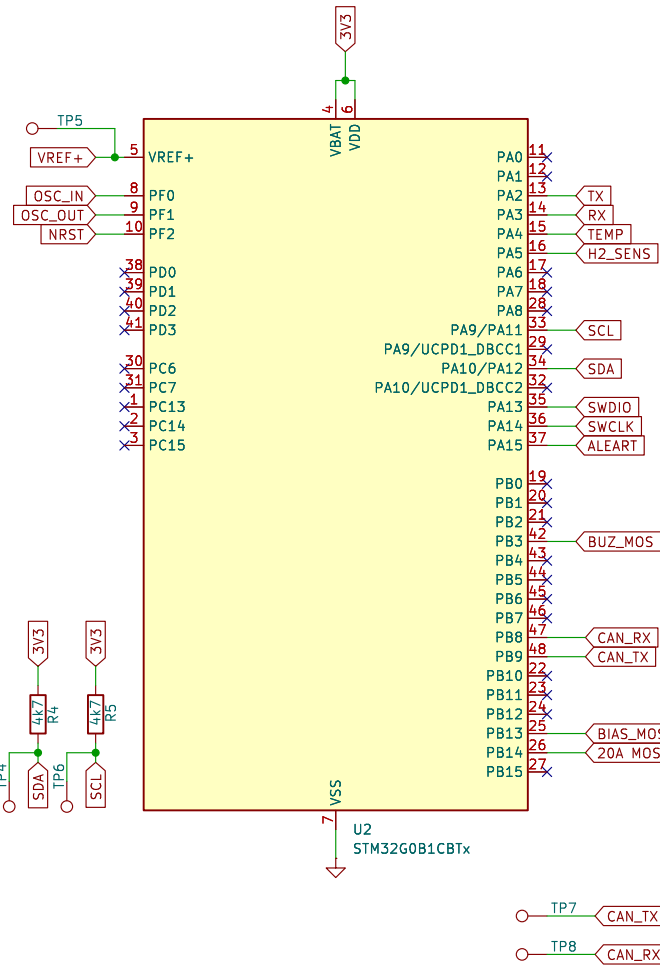

HSE CRSYAL

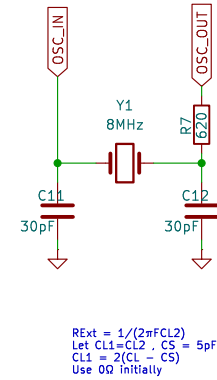

BOOT CONFIG



PERIPHERAL

PERIPHERAL

The ePlane Company

Sheet: /

File: Metal-Air_BMS.kicad_sch

Title: Single Cell Aluminium-Air BMS

Size: A4


Date: 2026-06-12

KiCad E.D.A. 9.0.8


Rev: V1.2.1

Id: 1/2

INA226 CURRENT SENS

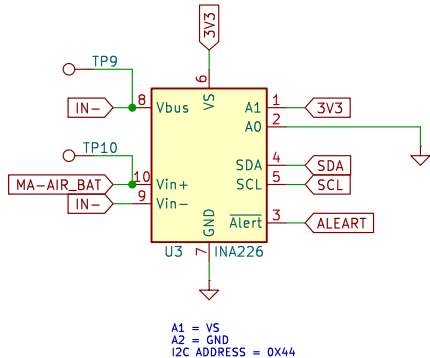


INA226 CONFIG

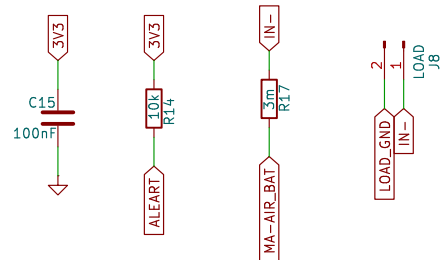


CAN TRANSRECEIVER


MODES:
R5 to GND via 10k High speed
R5 to 3V3 via 10k Low Power
R5 to GND Slope control

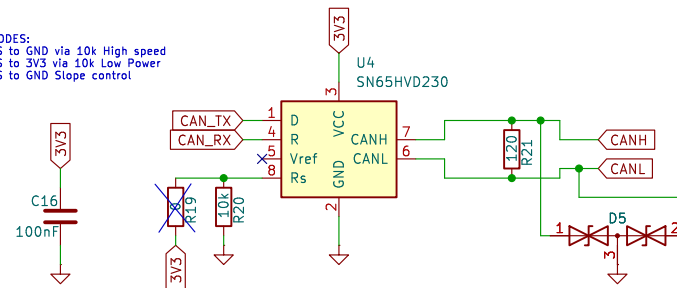


TEMP & H2 MONITOR

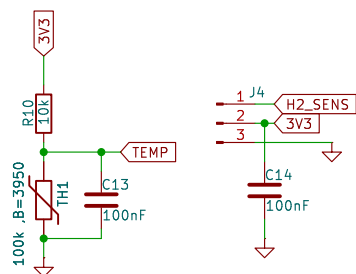


CUT OFF CIRCUIT

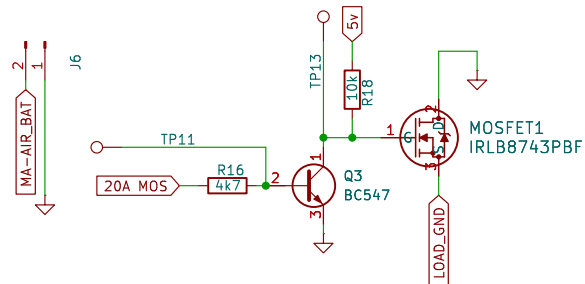


CAN & UART




BUZZER DRIVE

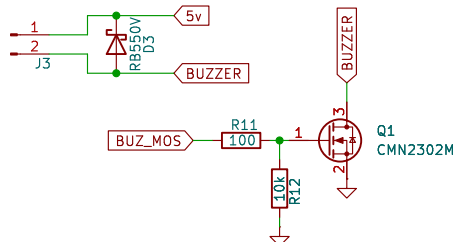

BIAS OUTPUT

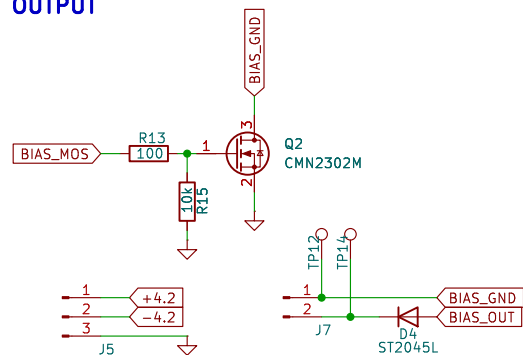

OP AMP

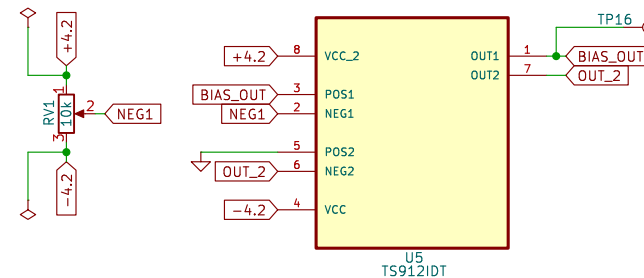

The ePlane Company

Sheet: /PERIPHERAL/

File: Peripheral.kicad_sch

Title: Single Cell Aluminium-Air BMS

Size: A4

Date: 2026-06-12

KiCad E.D.A. 9.0.8

Rev: V1.2.1

Id: 2/2