


SMART BCS

System architecture

REV A

13 SEP 2026

Automated bottle collection with identification, weight validation, rewards and SMS receipts

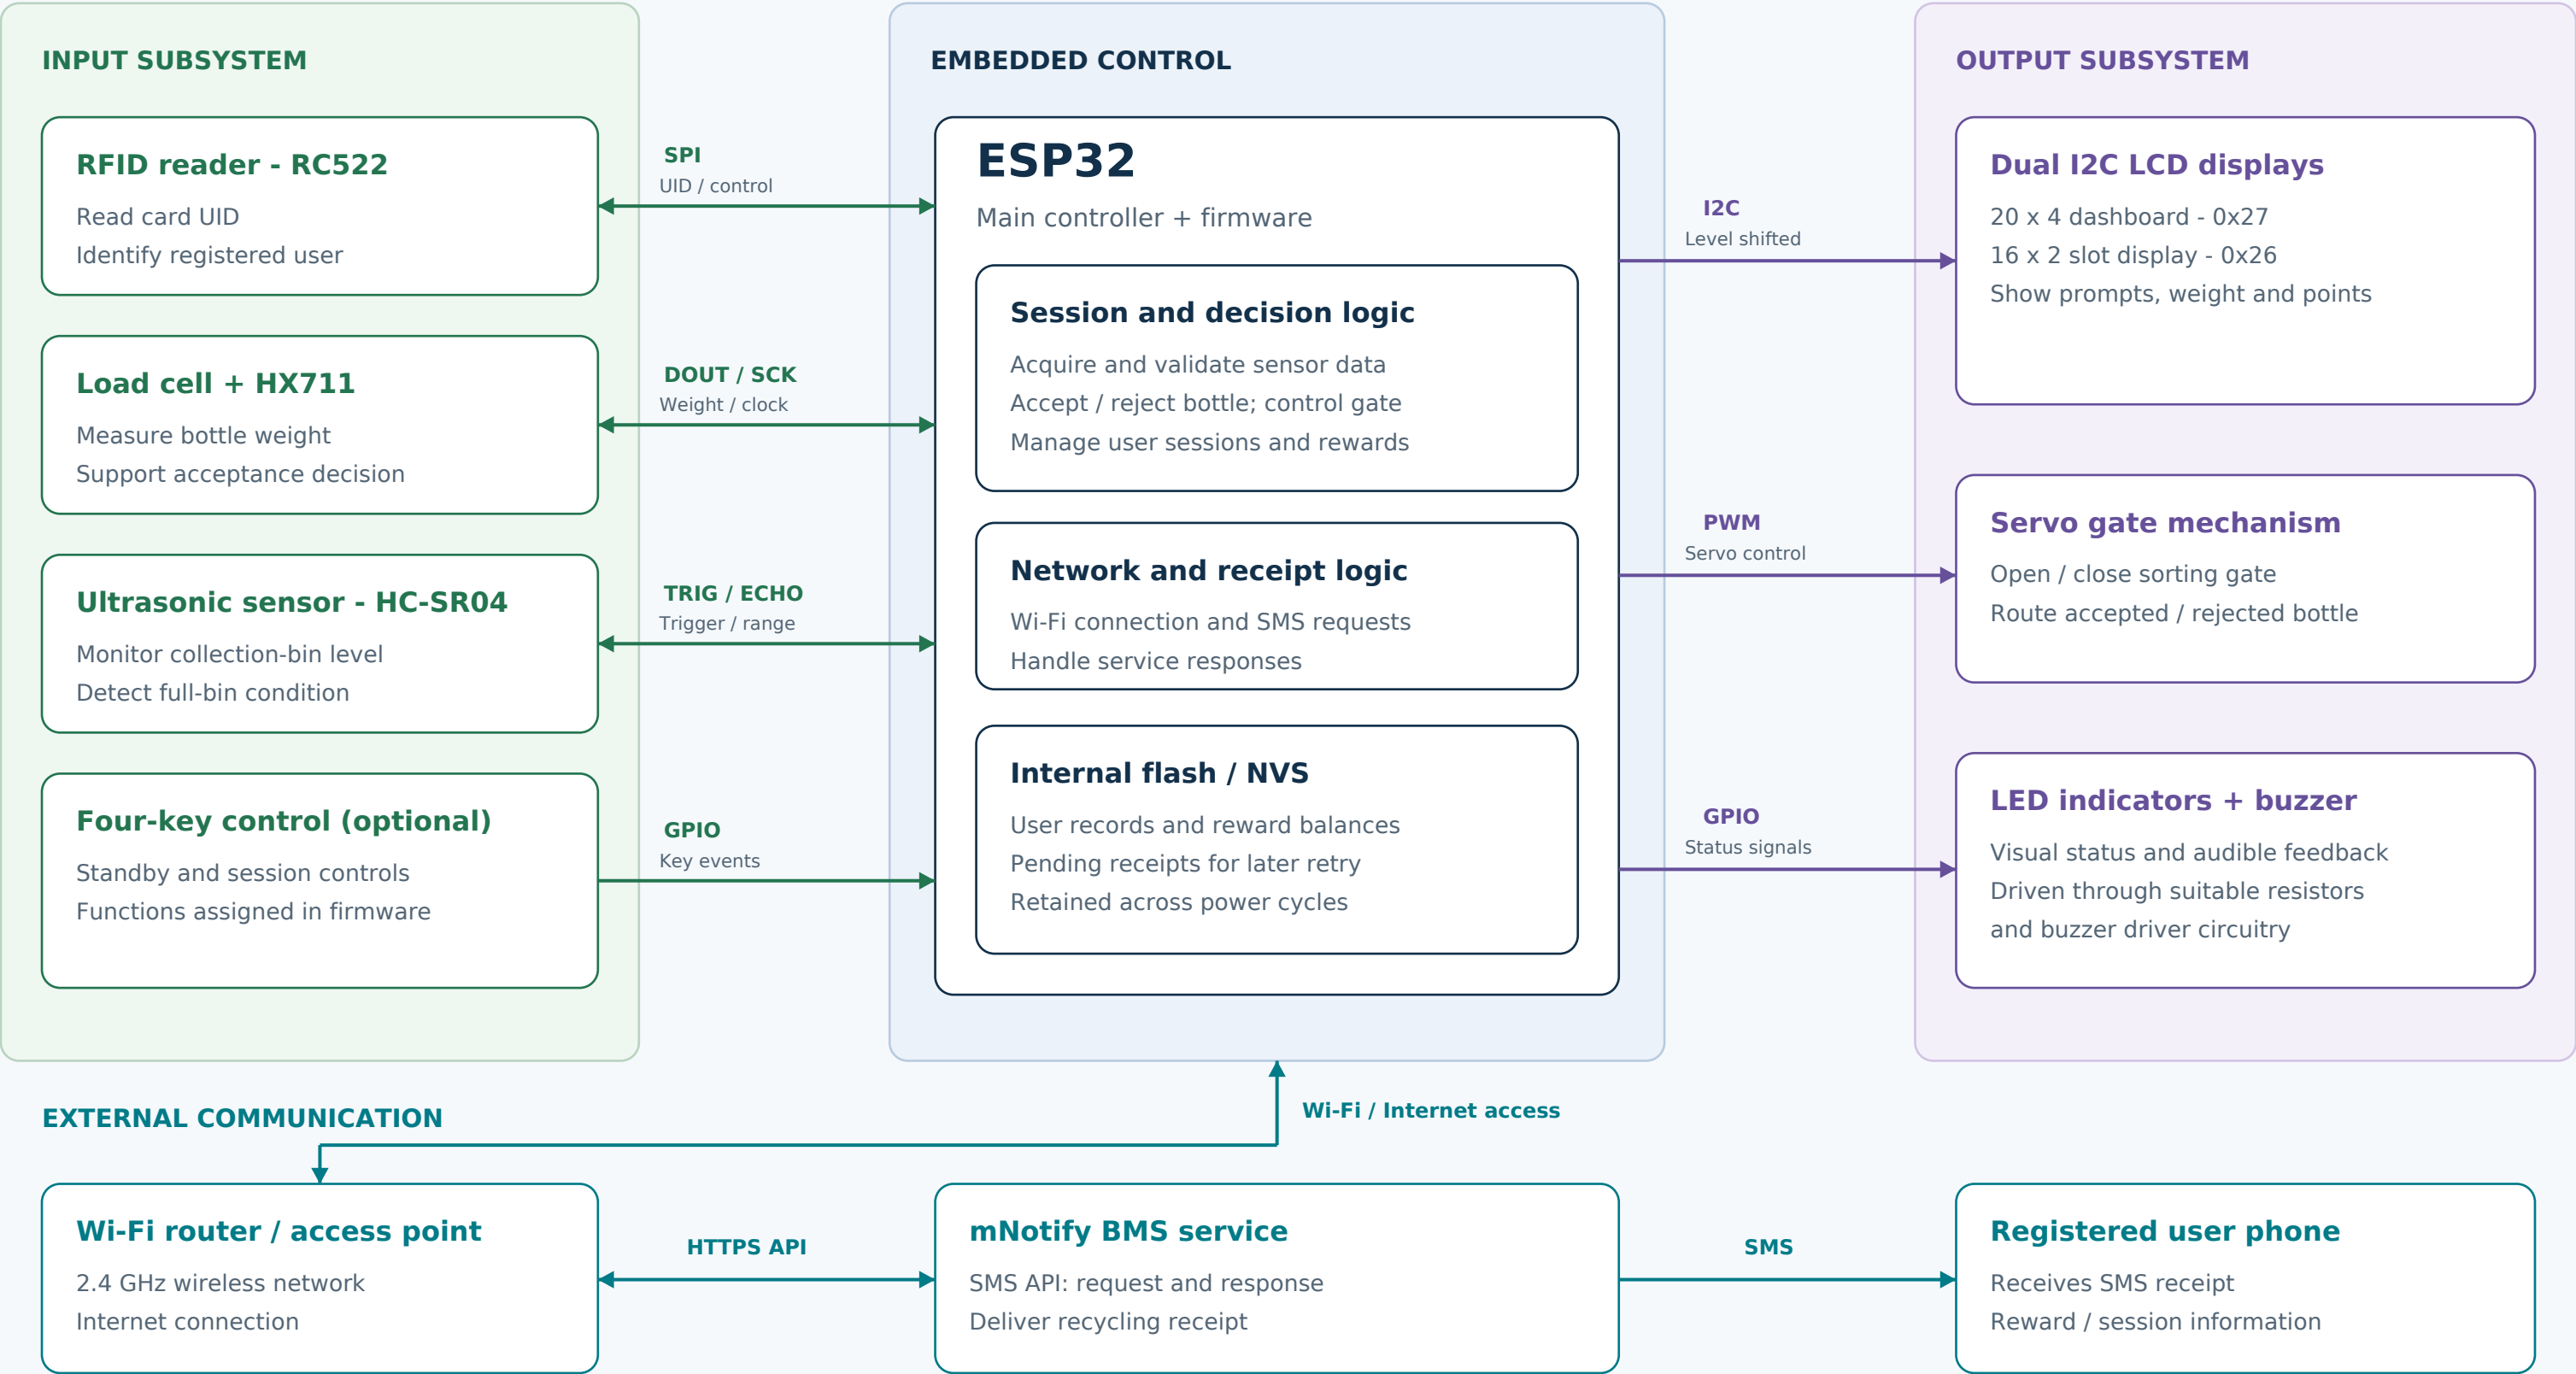

READING THE DIAGRAM

Arrows show information or control flow. Double arrows indicate commands and returned data.
NVS is inside the ESP32. Power distribution and individual GPIO wiring belong in the separate electrical schematic.