

XEBEX AMSB CYCLE
Maintenance Information

Service	Daily	Monthly	Quarterly	Annually
Clean/Dry Frame & Console	X			
Inspect Unit for Noise or loose components	X			
Tighten Handlebars	X			
Tighten Pedals		X		
Ensure Unit is level-Adjust Stabilizer Feet		X		
Tighten Front / Rear stabilizer bolts		X		

-See detailed instructions below

1. Dry and Clean the Main Frame and Console (Daily):

Use 3-in-1 OIL for the black coated parts and any metal area.

Handlebars and seat can just use towel and water to wipe sweat off

2. Handlebar Assembly Check (Daily):


Tighten both A11 knobs. 1 knob controls the handlebar post moving up and down, the 2nd knob controls the handlebar moving forward and back.



XEBEX AMSB CYCLE
Maintenance Information

3. Pedal Check (Monthly):

Tighten the pedals with a wrench. The right side pedals will tighten “righty tightly” (clockwise) and the left side pedal will tighten “lefty tightly” (counter-clockwise).

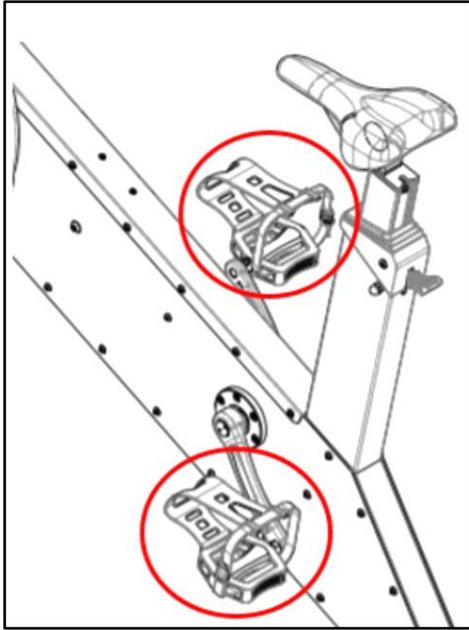

4. Tightening front / rear stabilizer bolts

Check and tighten the front / rear stabilizer bolts.

