

EMA-60

THE DEFINITIVE CASEMENT WINDOW AND DOOR SYSTEM

Your profile of choice for ensuring **maximum ventilation** through windows. Moreover, the casement's tight seal provides it with a **superior sound insulation** compared to its counterparts.

Technical specifications

- 1 60mm sash profile width
- 2 60mm frame profile width
- 3 2.5mm profile thickness
- 5 4-6mm single glazing option
- 6 24mm double glazing option
- 7 Uf value of 1.1 W/m²K
- 8 4 chambered system enhancing profile durability and insulation.
- 9 One type of steel reinforcement and gasket reducing storage costs.
- 10 TPE gasket available in black, white and gray.


Available colours




Quality certificates




Design options







EMA4273
Frame profile
6 pieces/ package

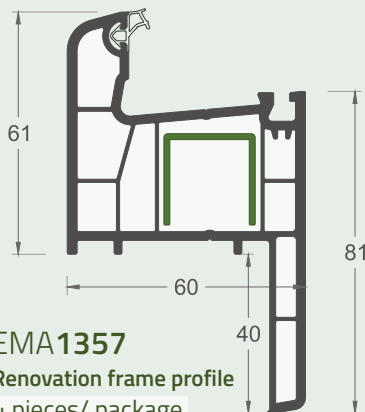


EMA1357
Renovation frame profile
4 pieces/ package

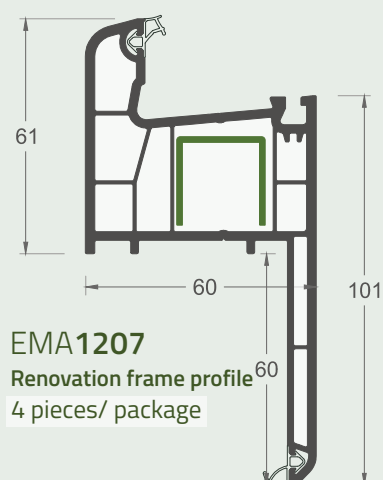


EMA1207
Renovation frame profile
4 pieces/ package

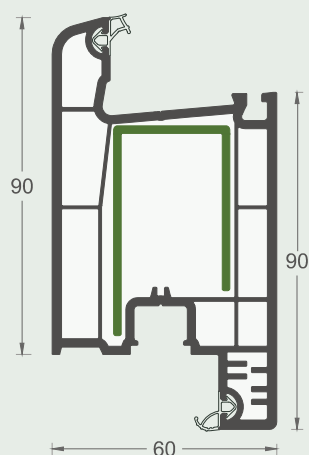


EMA4276
Inward door profile
4 pieces/ package

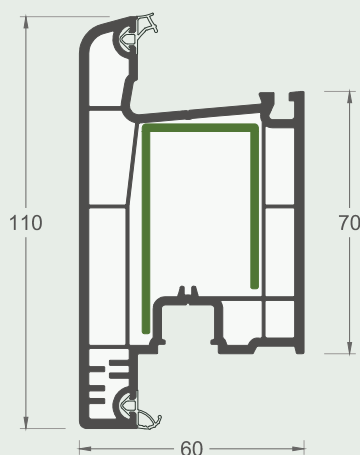


EMA1208
Outward door profile
4 pieces/ package




EMA4274
Window sash profile
6 pieces/ package

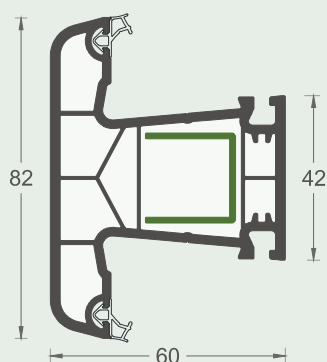


EMA4275
Mullion profile
6 pieces/ package




EMA4277
Movable mullion profile
6 pieces/ package

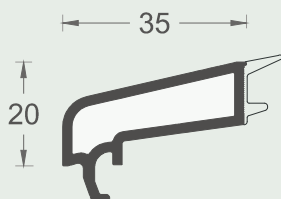


EMA4279
Single glazing bead
20 pieces/ package




EMA4278
Double glazing bead
25 pieces/ package




EMA4282
Frame sill profile
10 pieces/ package




EMA6710
Frame sill profile
10 pieces/ package

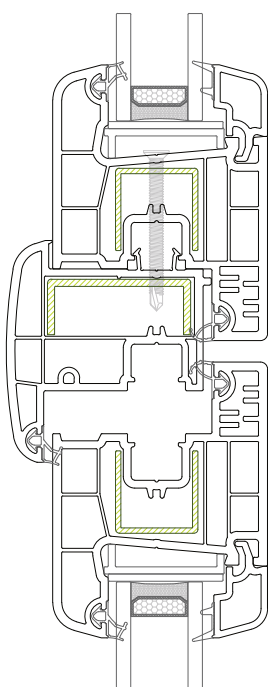

Section A
Vertical section of door sash
and mullion connection

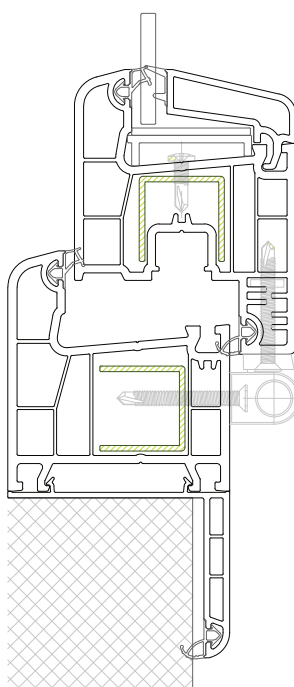

Section B
Vertical section of door sash
and frame connection

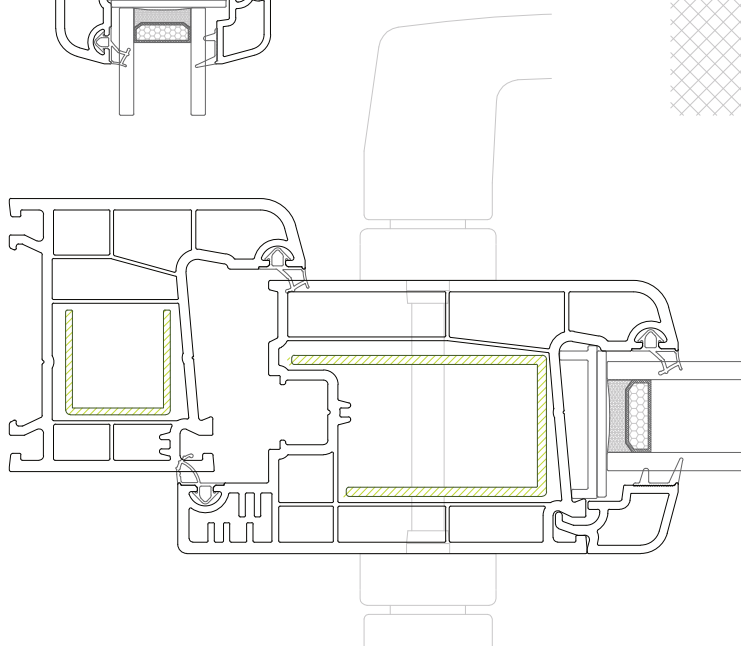

Section C
Horizontal section of door sash
and frame connection