

EMA-60S

STANDARD SLIDING WINDOW SYSTEM

The default option for your sliding windows, ideal when opting for **wide unobstructed views**.

Moreover, the horizontal movement of the sliding systems makes them more suitable for **limited interior spaces**.

Technical specifications

- 1 60mm sash profile width
- 2 126mm frame profile width
- 3 2.3mm profile thickness
- 5 4-6mm single glazing option
- 6 24mm double glazing option
- 7 Uf value of 1.1 W/m²K
- 8 3 chambered system enhancing profile durability and insulation.
- 9 One type of steel reinforcement and gasket reducing storage costs.
- 10 TPE gasket available in black, white and gray.


Available colours




Quality certificates




Design options







EMA4280
Sliding frame profile
4 pieces/ package

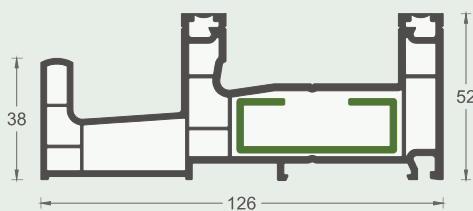


EMA4281
Fixed sliding frame profile
6 pieces/ package

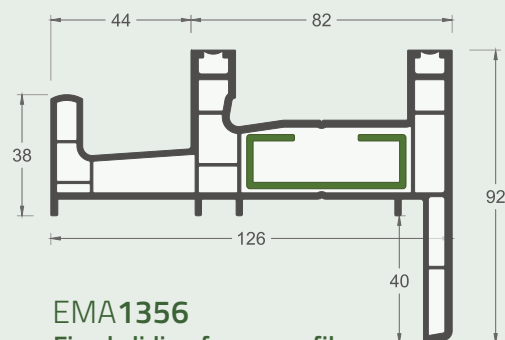


EMA1356
Fixed sliding frame profile
6 pieces/ package




EMA4283
Sliding sash profile
6 pieces/ package




EMA1223
Mosquito sash profile
15 pieces/ package




EMA4285
Mosquito sash profile
15 pieces/ package




EMA4275
Mullion profile
6 pieces/ package




EMA4284
Interlock profile
10 pieces/ package




EMA4279
Single glazing bead
20 pieces/ package




EMA4278
Double glazing bead
25 pieces/ package



EMA4282
Frame sill profile
10 pieces/ package




EMA6710
Frame sill profile
10 pieces/ package

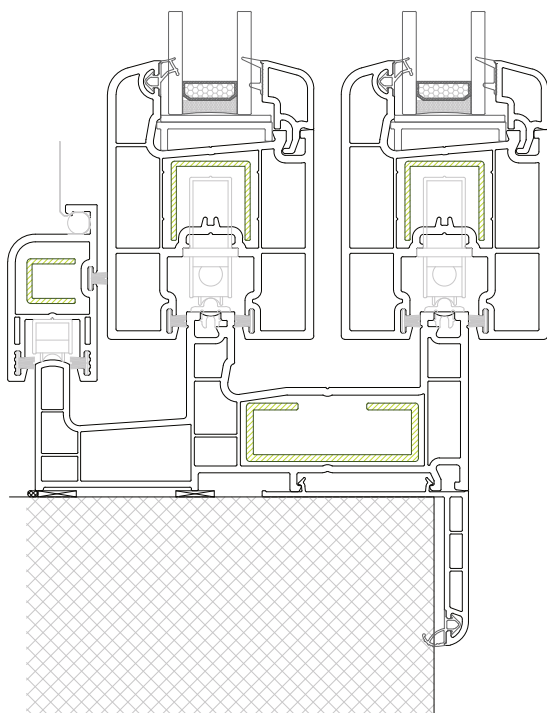



Section A

Vertical section of window sash and frame connection

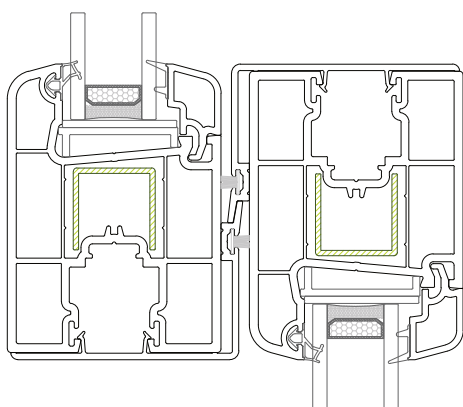

Section B

Horizontal section of window sash interlock

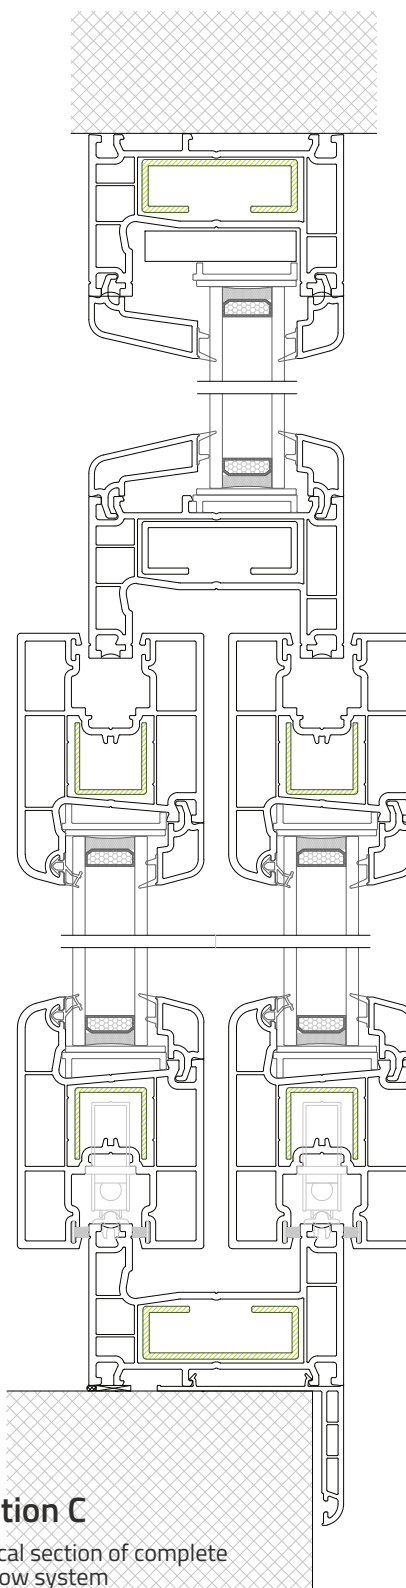

Section C

Vertical section of complete window system