Welcome to Teensy 3.2

32 Bit Arduino-Compatible Microcontroller

To begin using Teensy, please visit the website & click Getting Started.

www.pjrc.com/teensy

Digital Pins

digitalRead digitalWrite pinMode

Analog Pins

analogRead analogReference analogReadRes

PWM Pins

analogWrite analogWriteRes

Touch Sense Pins


touchRead

Serial Ports

Serial1 Serial2 Serial3

I²C Port
Wire Library

SPI Port
SPI Library

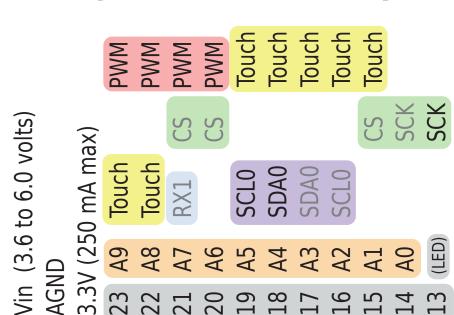



¥ ¥

DOUT CS CS CS DOUT DIN

All digital pins have Interrupt capability.

A14/DAC

Program

GND

3.3V


VBat

PWM PWM

CAN Bus

Teensy 3.2 Back Side

Additional pins and features available on the back side

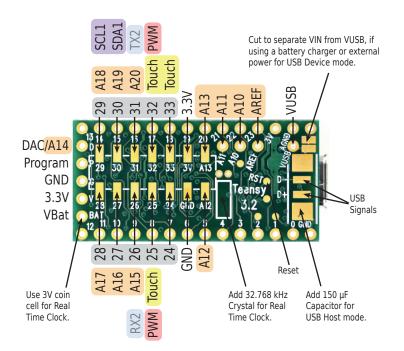

For solutions to the most common issues and technical support, please visit:

www.pjrc.com/help

Teensy 3.2 System Requirements: PC computer with Windows 7, 8, 10 or later or Ubuntu Linux 12.04 or later or Macintosh OS-X 10.7 or later USB Micro-B Cable

