
Ball Bearing Cages




Product Features

Ball cages are manufactured from a heat treated aluminum alloy which provides tough, wear resistant qualities. The ball bearings are vacuum degassed quality, fatigue resistant steel and are inspected to ensure roundness, smoothness and dimensional conformance. The ball bearings are arranged in the cage in a spiral pattern to minimize tracking or grooving and assure uniform wear. Ball cages are mounted to drilled and tapped guide posts by a special washer assembly which permits the cage to rotate freely around the guide post when not under preload.

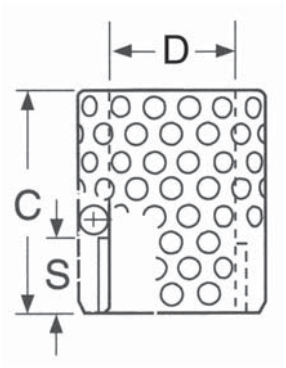

TYPE I
For Type I
Ball Bearing
Bushing Assembly

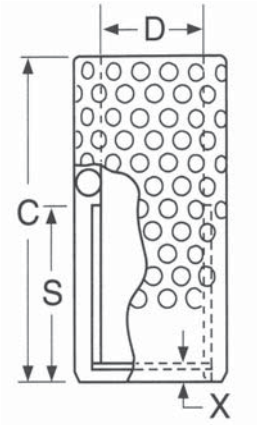

TYPE II
For Type II and Type III
Ball Bearing
Bushing Assemblies

D mm	C mm	S mm	X mm	Type I Part Number	Type II Part Number
25	36	11.5	4.2	6-2503-81	—
	48	17.5		6-2504-81	—
	55	31		—	6-2505-82
	70	40		—	6-2507-82
	90	47		—	6-2509-82
	100	55		—	6-2510-82
	110	65		—	6-2511-82
32	36	11.5	4.2	6-3203-81	—
	48	17.5		6-3204-81	—
	70	40		—	6-3207-82
	90	47		—	6-3209-82
	105	55		—	6-3210-82
	115	65		—	6-3211-82
	125	75		—	6-3212-82
	135	85		—	6-3213-82
40	48	17.5	5.8	6-4004-81	—
	60	23.5		6-4006-81	—
	70	40		—	6-4007-82
	85	48		—	6-4008-82
	105	56		—	6-4010-82
	115	66		—	6-4011-82
	125	76		—	6-4012-82
	135	86		—	6-4013-82
	145	96		—	6-4014-82
	155	107		—	6-4015-82

D mm	C mm	S mm	X mm	Type I Part Number	Type II Part Number
50	70	28.5	7.0	6-5007-81	—
	84	35.5		6-5008-81	—
	105	56		—	6-5010-82
	120	65		—	6-5012-82
	140	76		—	6-5014-82
	150	86		—	6-5015-82
	160	96		—	6-5016-82
	170	108		—	6-5017-82
	185	121		—	6-5018-82
	195	133		—	6-5019-82
63	98	42.4	7.0	6-6309-81	—
	145	76		—	6-6314-82
	165	86		—	6-6316-82
	180	96		—	6-6318-82
	190	107		—	6-6319-82
	205	121		—	6-6320-82
	215	132		—	6-6321-82
80	98	42.5	8.5	6-8009-81	—
	145	76		—	6-8014-82
	165	86		—	6-8016-82
	180	96		—	6-8018-82
	190	107		—	6-8019-82
	205	121		—	6-8020-82
	215	132		—	6-8021-82