

NORTH AMERICA ONLY

AIR HOSE FITTINGS, & PIPE SPECIFICATIONS

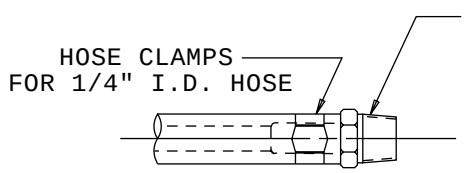


AIR HOSE WDX35-80-0501
CALL OUT WDX NUMBER

PURCHASE HOSE FROM SYNFLEX 3600-04 GRAY HOSE,
GOODYEAR INSTA GRIP 1 927-3-04 OR
PARKER 821-FR-4 (BLUE HOSE)




HOSE ADAPTOR WDX35-80-0502
CALL OUT WDX NUMBER

PURCHASE ADAPTOR FROM
PARKER 0107-4-4 OR
SAE 4-4 140130

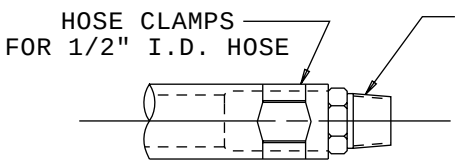


AIR HOSE WDX35-80-0503
CALL OUT WDX NUMBER

PURCHASE HOSE FROM SYNFLEX 3600-08,
GOODYEAR INSTA GRIP 1 927-3-08 OR
PARKER 821-FR-8 (BLUE HOSE)




HOSE ADAPTOR WDX35-80-0504
CALL OUT WDX NUMBER

PURCHASE ADAPTOR FROM
PARKER 0107-6-6 OR
SAE 6-6-140130

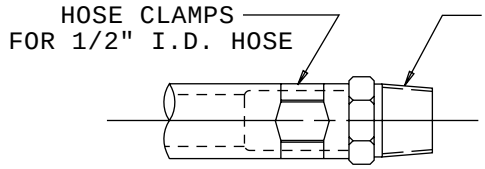


AIR HOSE WDX35-80-0503
CALL OUT WDX NUMBER

PURCHASE HOSE FROM SYNFLEX 3600-08,
GOODYEAR INSTA GRIP 1 927-3-08 OR
PARKER 821-FR-8 (BLUE HOSE)




HOSE ADAPTOR WDX35-80-0506
CALL OUT WDX NUMBER

PURCHASE ADAPTOR FROM
PARKER 0107-8-8 OR
SAE 8-8 140130

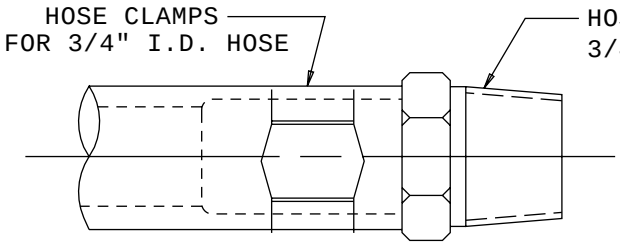

AIR HOSE WDX35-80-0507
CALL OUT WDX NUMBER

PURCHASE HOSE FROM SYNFLEX 3600-12,
GOODYEAR INSTA GRIP 1 927-3-12 OR
PARKER 821-FR-12 (BLUE HOSE)

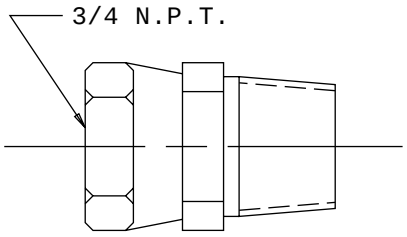

HOSE ADAPTOR WDX35-80-0508
CALL OUT WDX NUMBER


PURCHASE ADAPTOR FROM
PARKER 0107-12-12 OR
SAE 12-12 140130

NOTE: ORDER THESE ITEMS AS SHOWN OR EQUIVALENT.
LOW PRESSURE FITTINGS, BLACK MALLEABLE IRON, 150 PSI, WILL BE USED FOR ALL LIFTERS, KICKERS, DIAPPEARING GAGES, ETC.


NORTH AMERICA ONLY


AIR FITTINGS AND HOSE

USE ON FINGER ASSEMBLY FOR TRANSFER PRESSES

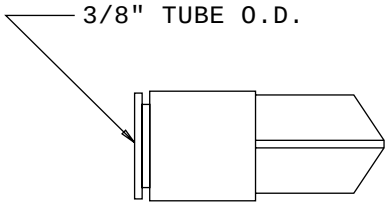


FOR APPLICATION
SEE W-DX9-50M
PAGE 6




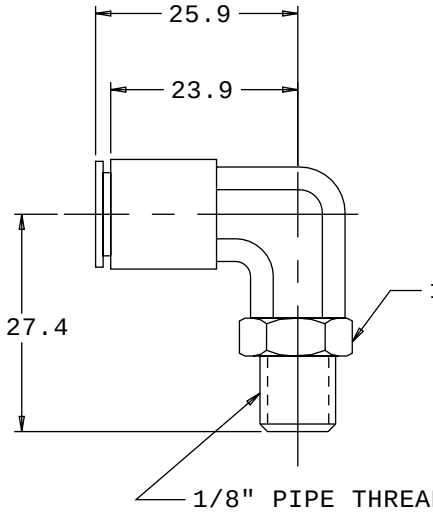

FORD PART NUMBER
WDX35-80-0662
SWIVEL MALE ELBOW
ALKON #AQ69-PS-6X2
OR EQUIVALENT
1/8" PIPE THREAD
3/8" TUBE O.D.

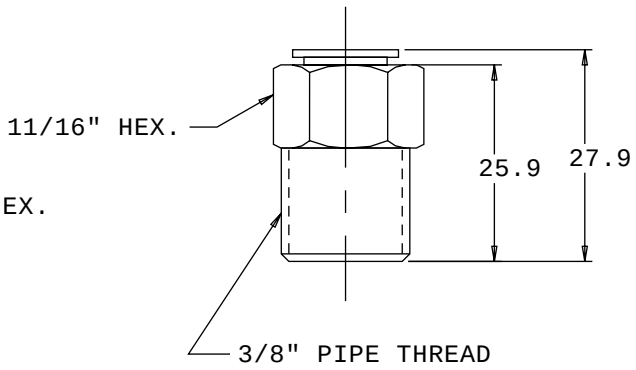

FORD PART NUMBER
WDX35-80-0666
MALE CONNECTOR
ALKON #AQ68-P-6X6
OR EQUIVALENT
3/8" PIPE THREAD
3/8" TUBE O.D.

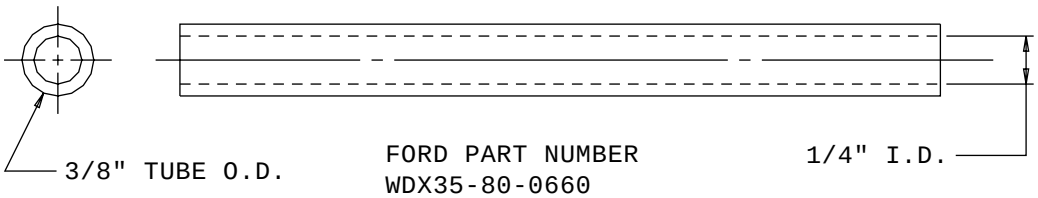


FORD PART NUMBER
WDX35-80-0660

AIR HOSE
POLYURETHANE
NYCOIL #63660
OR EQUIVALENT
3/8" O.D. WALL
0.062" THICK

NOTE:
MIN. BEND RADIUS 25
WORKING PSI @75° 125
BURST PSI @75° 400


NORTH AMERICA ONLY

SINGLE ACTION, SPRING RETURN AIR CYLINDERS WITH FLANGED CAP

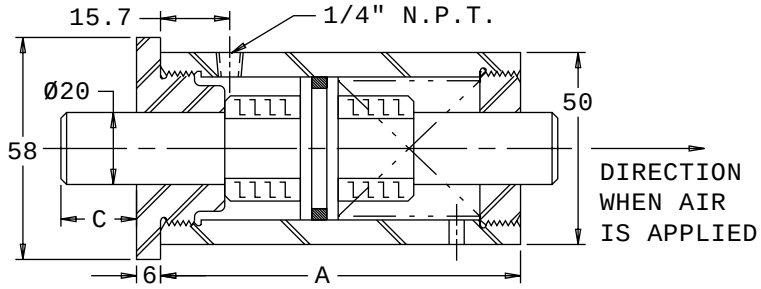


APPLICATION: GAGES

FORD NUMBER	STROKE	BORE	A	C	SHAFT LENGTH
WNC4-0202	20	38	95	20	127
WNC4-0204	32	38	108	32	152
WNC4-0205	50	38	133	50	197

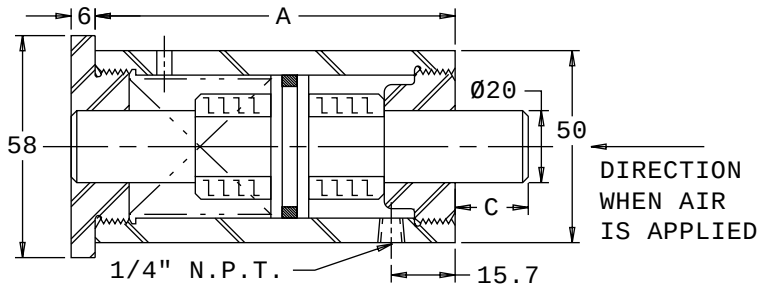


APPLICATION: LIFTERS & KICKERS

FORD NUMBER	STROKE	BORE	A	C	SHAFT LENGTH
WNC4-0212	20	38	95	20	127
WNC4-0214	32	38	108	32	152
WNC4-0215	50	38	133	50	197

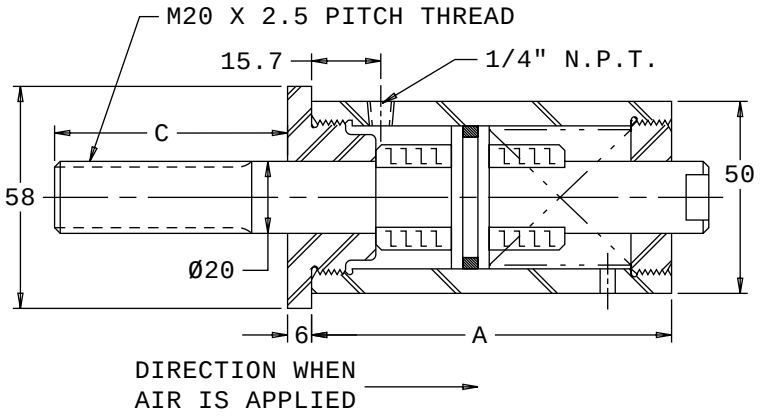

APPLICATION: GAGES


FORD NUMBER	STROKE	BORE	A	C	SHAFT LENGTH
WNC4-0237	20	38	95	60	171
WNC4-0239	32	38	108	73	197
WNC4-0240	50	38	133	92	241

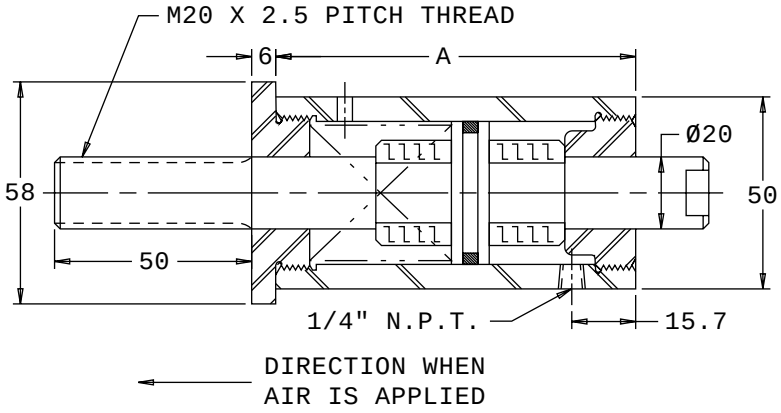

APPLICATION: LIFTERS & KICKERS


FORD NUMBER	STROKE	BORE	A	SHAFT LENGTH
WNC4-0241	20	38	95	171
WNC4-0242	32	38	108	197
WNC4-0243	50	38	133	241

SINGLE ACTION, SPRING RETURN AIR CYLINDERS WITHOUT FLANGED CAP

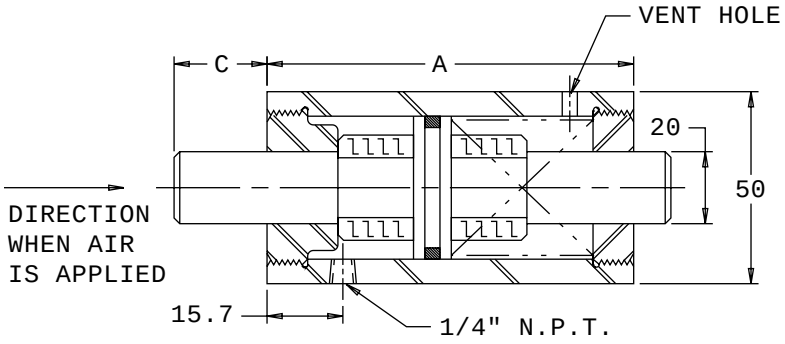


APPLICATION: GAGES

FORD NUMBER	STROKE	BORE	A	C
WNC4-0102	20	38	95	20
WNC4-0104	32	38	108	32
WNC4-0105	50	38	133	50

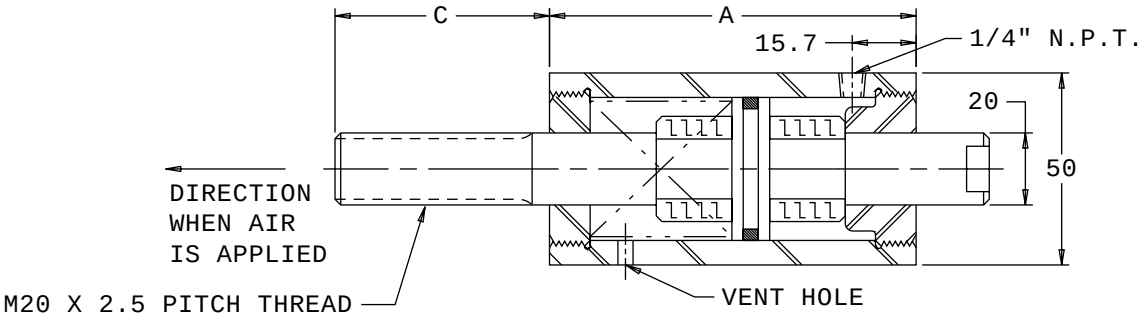

APPLICATION: LIFTERS & KICKERS

FORD NUMBER	STROKE	BORE	A	C
WNC4-0138	20	38	95	57
WNC4-0139	32	38	108	57
WNC4-0140	50	38	133	57

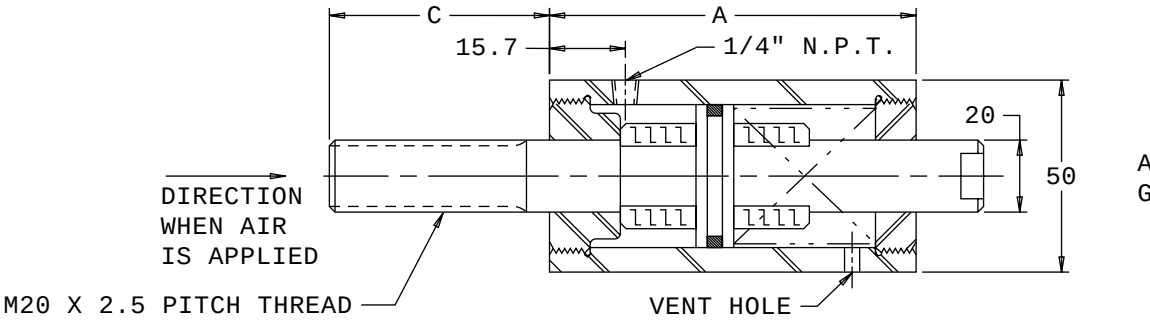


APPLICATION: GAGES

FORD NUMBER	STROKE	BORE	A	C
WNC4-0141	20	38	95	67
WNC4-0142	32	38	108	79
WNC4-0143	50	38	133	98

NORTH AMERICA ONLY


NITROGEN JUNCTION BLOCKS

USE WITH FORD ENGINEERING APPROVAL.

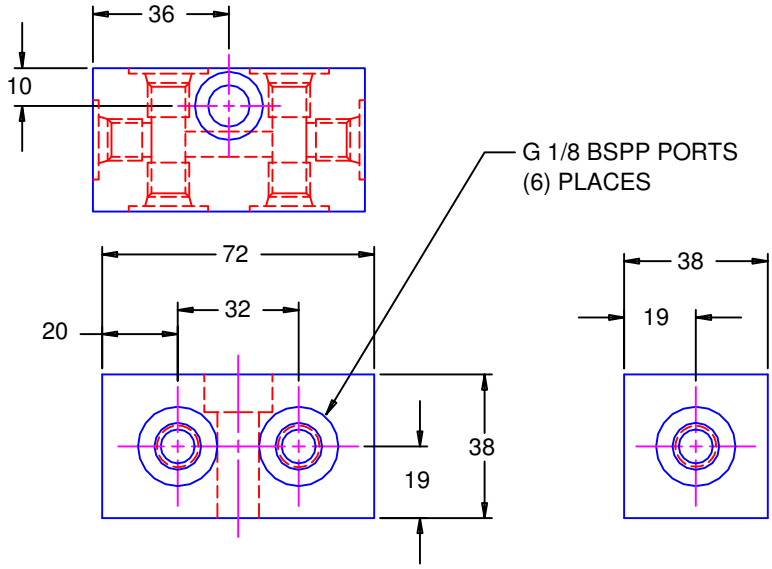

FORD PART NUMBER
WDX35-80-1701

FOR APPLICATION
SEE WDX35-50M
PAGE 29.

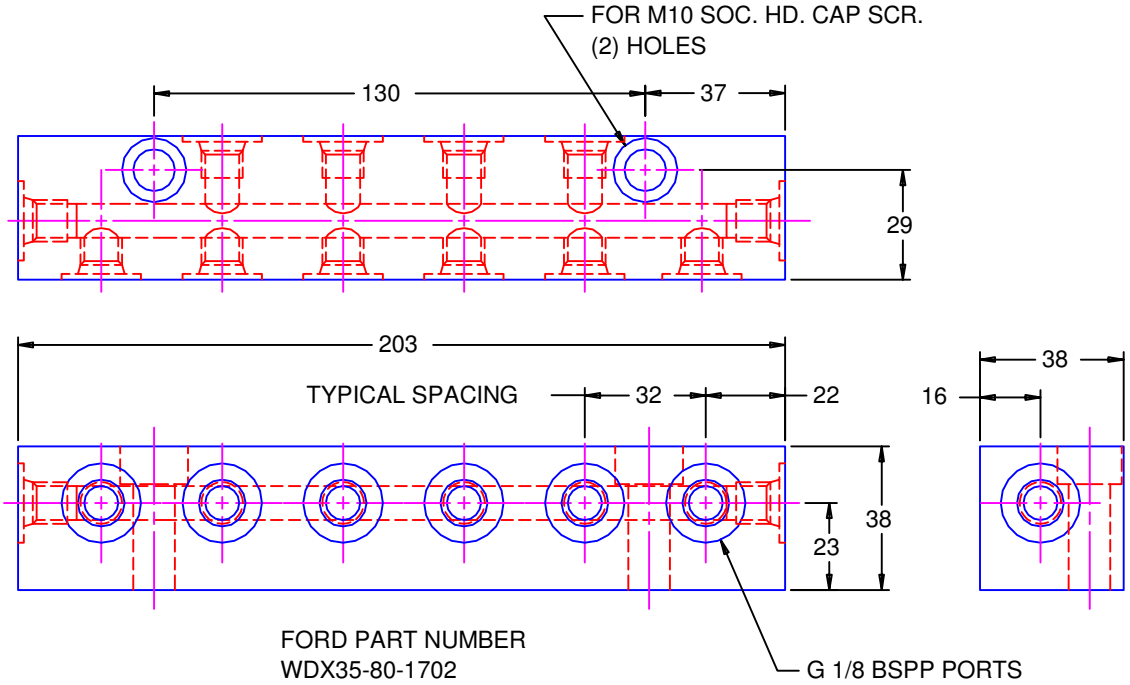


FORD PART NUMBER
WDX35-80-1702

MATERIAL:
ALUMINUM
SAE-6061-T6

EACH PART MUST BE PERMANENTLY MARKED WITH THE FULL ORDERING NUMBER AND MANUFACTURER'S BRAND.

NORTH AMERICA ONLY

M24 THREADED BODY NITROGEN GAS SPRING

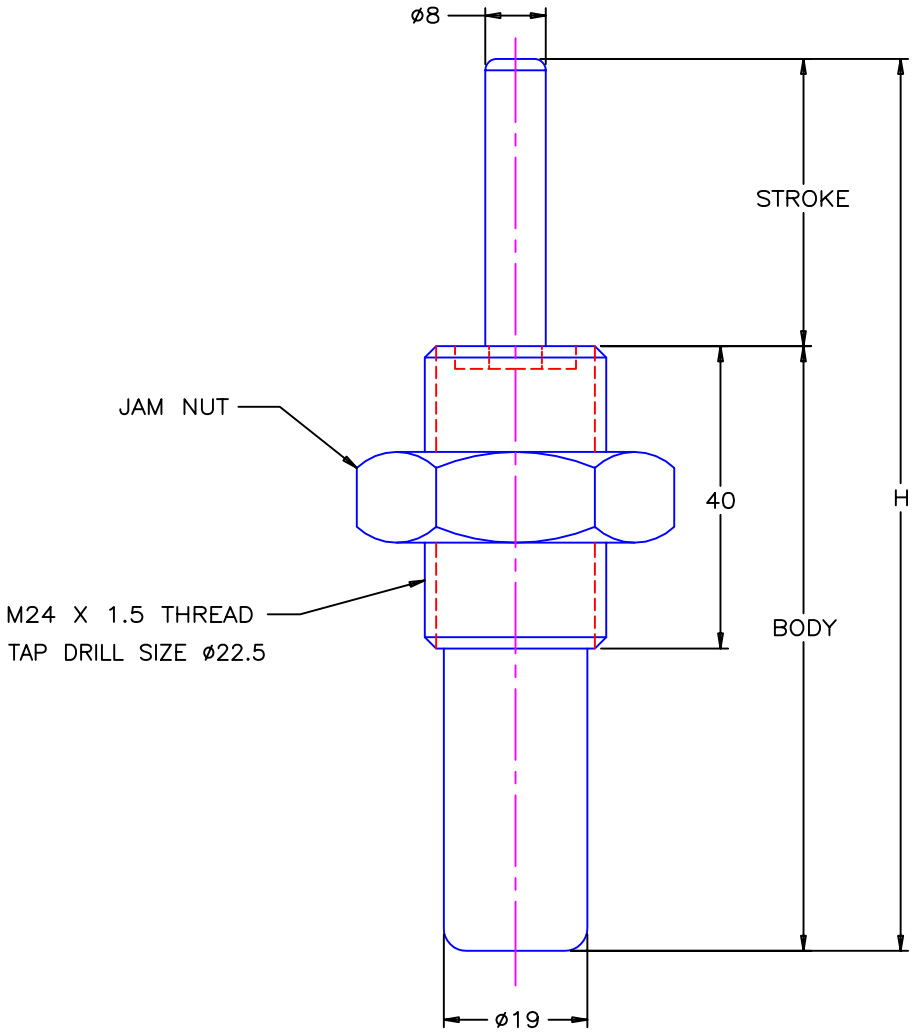

FORD NUMBER	STROKE	BODY	H
WDX35–80–1807	7	49	56
WDX35–80–1815	15	57	72
WDX35–80–1825	25	67	92
WDX35–80–1838	38	80	118
WDX35–80–1850	50	92	142
WDX35–80–1880	80	125	205

ORDERING EXAMPLE:


WDX35–80–1838–050–P

- ROD END: R = REGULAR, S = SPHERICAL, P = PLASTIC BUMPER
- CHARGING PRESSURE (40–200 LBS.)
- STROKE LENGTH

CHARGING PRESSURE	40 LBS.	50 LBS.	100 LBS.	150 LBS.	200 LBS.
FORCE	513 PSI	640 PSI	1280 PSI	1925 PSI	2600 PSI

NORTH AMERICA ONLY

MICRO NITROGEN GAS SPRING
M24 THREADED BODY

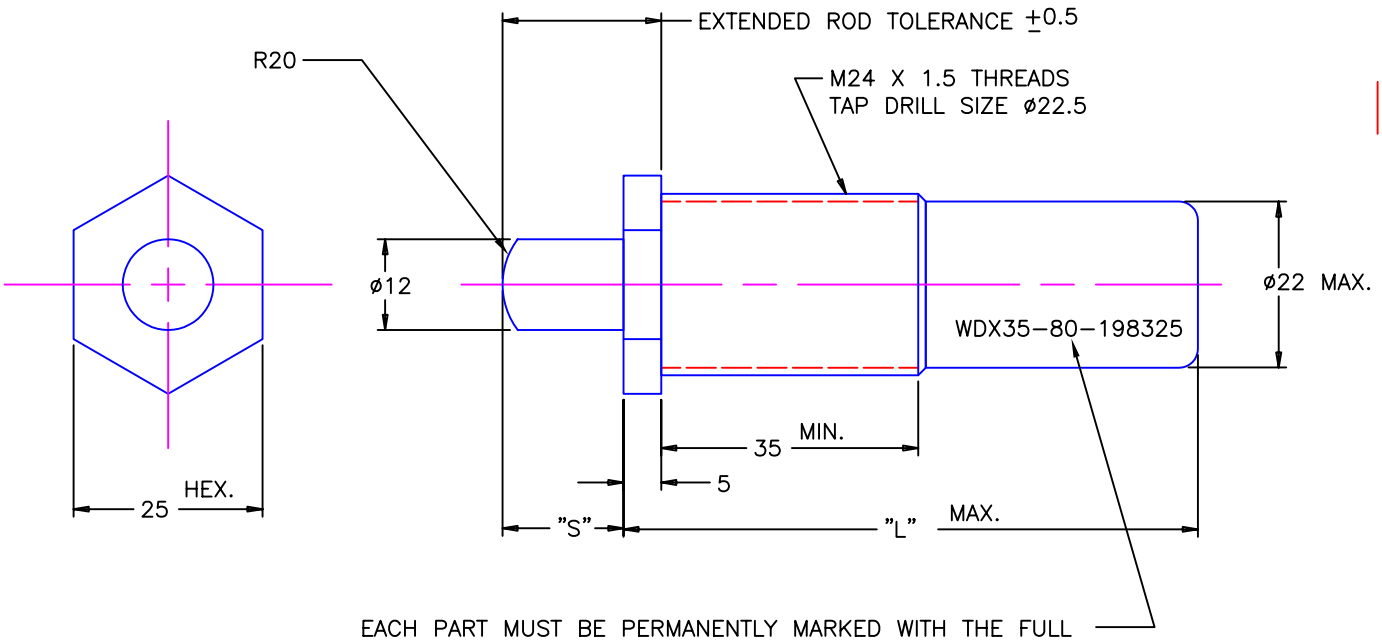

	CHARGING PRESSURE		INITIAL FORCE	
FORD PART NUMBER	BAR	PSI	N	LBS.
WDX35–80–1982––	6	87	68	15
WDX35–80–1983––	10	135	113	25
WDX35–80–1984––	25	363	282	63
WDX35–80–1985––	45	653	508	114
WDX35–80–1986––	60	870	677	152
WDX35–80–1987––	80	1160	903	203
WDX35–80–1988––	150	2175	1693	383

STROKE "S"	BODY "L"
10	70
16	76
25	85
38	98
50	110
80	140


ORDERING EXAMPLE:

WDX35–80–19 83 25

- 25mm STROKE
- FORCE CODE
- FORD WDX NUMBER

NORTH AMERICA ONLY

AIR HEADER BLOCK KIT FOR 2 STATION

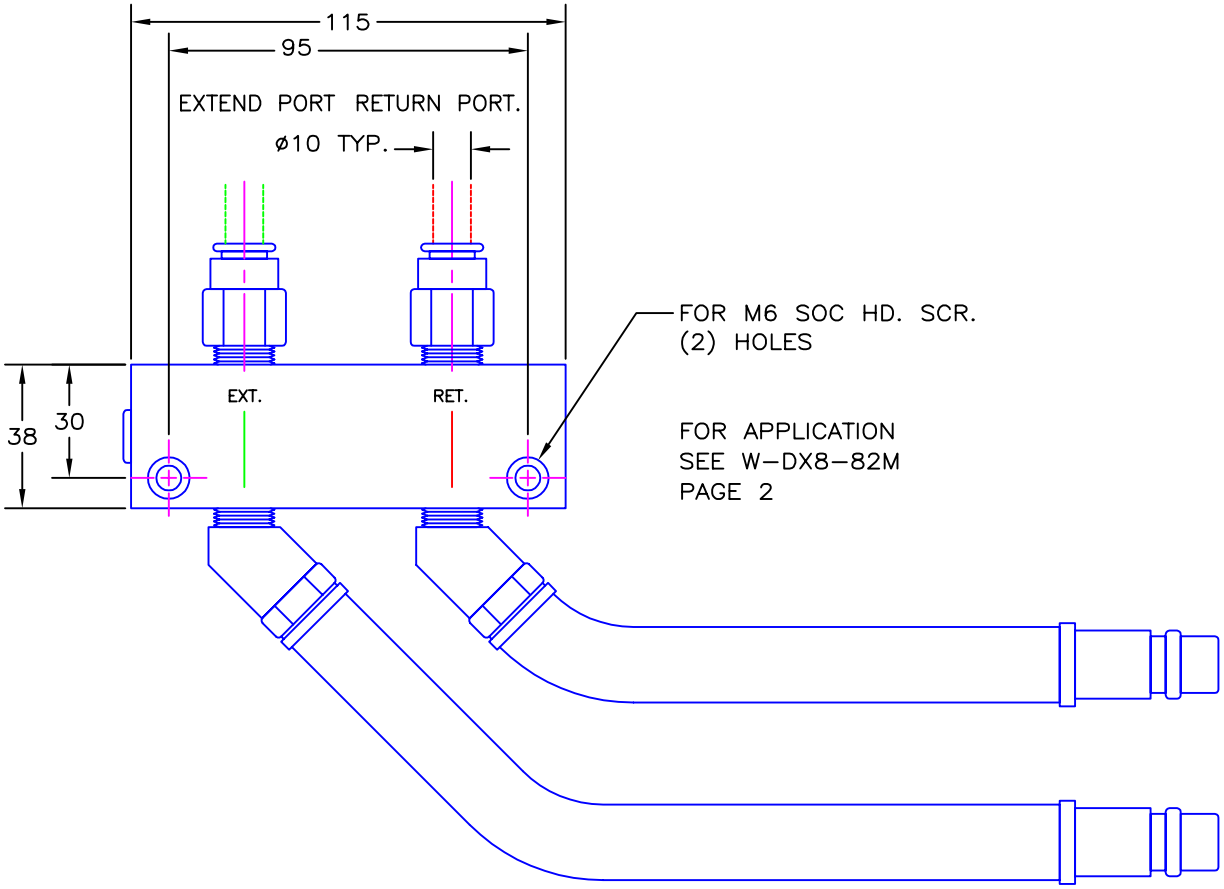


FORD PART NUMBER
WDX35-80-2102

THE ABOVE KIT PROVIDES EXTEND AND RETURN AIR CONNECTIONS FOR IN DIE AIR CYLINDER. PUSH IN FITTINGS ARE INCLUDED FOR USE WITH ø10 mm O.D. POLYURETHANE TUBING. USE GREEN TUBING (PT10G-020) FOR EXTEND FUNCTIONS AND RED TUBING (PT10R-020) FOR RETURN FUNCTIONS.

AMT.	PART NUMBER	DESCRIPTION JBL KIT NUMBER DF1AH10
1	AM2-6	AIR HEADER BLOCK, 2 STATION 3/8" NPT
2	CMS1038	CONNECTOR, MALE STRAIGHT 10mm OD X 3/8" NPT
2	2214P-6-6	45 DEGREE PIPE ELBOW ADAPTER, 3/8" X 3/8" NPT
2	DF1AS-3	HOSE ASSEMBLY, 1/2" ID YELLOW X 10 FEET
2	4440060050UB	SOCKET HEAD CAP SCR, M6-1 X 50
4	TC10	TUBE CLIP, 10mm X 1

NORTH AMERICA ONLY

FLOW CONTROL AIR HEADER KIT FOR 2 STATION

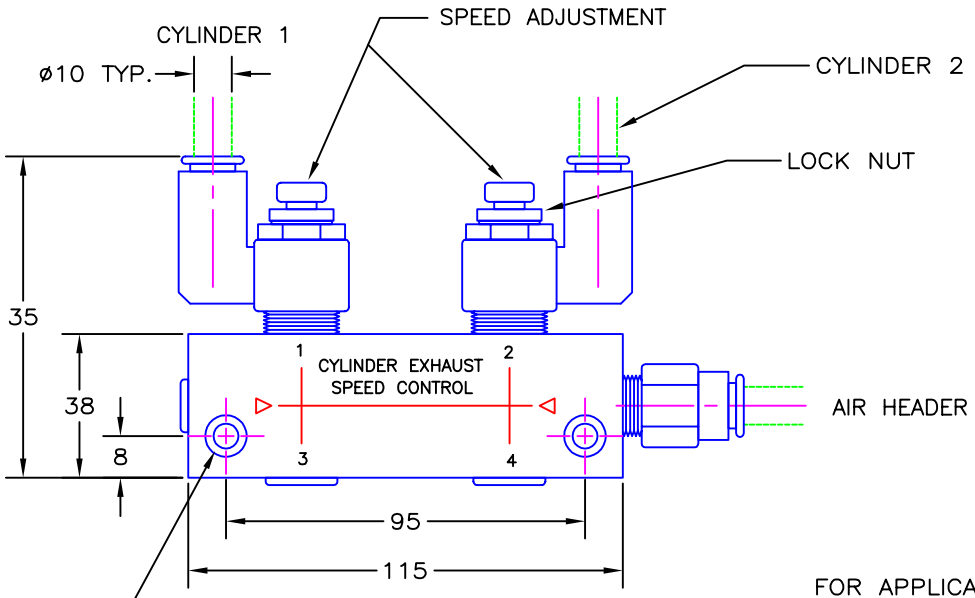

FORD PART NUMBER
WDX35-80-2202

FOR APPLICATION SEE W-DX8-82M PAGE 2

THE ABOVE KIT PROVIDES METER OUT CYLINDER SPEED CONTROL FOR TWO AIR CYLINDERS. TWO KITS ARE REQUIRED FOR EACH SET OF CYLINDERS, ONE FOR EXTEND AND ONE FOR RETURN FUNCTION. TO SET THE EXTEND SPEED, THE FLOW CONTROLS ON THE RETURN SIDE OF THE CYLINDER SHOULD BE ADJUSTED.
TO SET THE RETURN SPEED, THE FLOW CONTROLS ON THE EXTEND SIDE SHOULD BE ADJUSTED.


ORDER FROM;

JBL SYSTEMS, INC
51410 MILANO DRIVE
MACOMB, MI 48042

JBL KIT NUMBER DF1FM2-10

AMT.	PART NUMBER	DESCRIPTION
1	AM4-6	AIR MANIFOLD BLOCK, 4 STATION X 3/8" NPT
2	AS3311F-03-10S	FLOW CONTROL, 10mm OD X 3/8" NPT
3	053024000FU	PIPE PLUG, 3/8-18 NPT FLUSH
1	CMS1038	CONNECTOR, MALE ELBOW SWIVEL 10mm OD X 3/8" NPT
2	CME1028	CONNECTOR, MALE ELBOW SWIVEL 10mm OD X 1/4" NPT
2	440060050UB	SOCKET HEAD CAP SCR, M6-1 X 50
1	440060090UB	SOCKET HEAD CAP SCR, M6-1 X 90
8	TC10	TUBE CLIP, 10mm X 1
1	IDLFM2	FLOW CONTROL MANIFOLD INSTRUCTION LABEL

NON-ROTATING NITROGEN GAS LIFTER

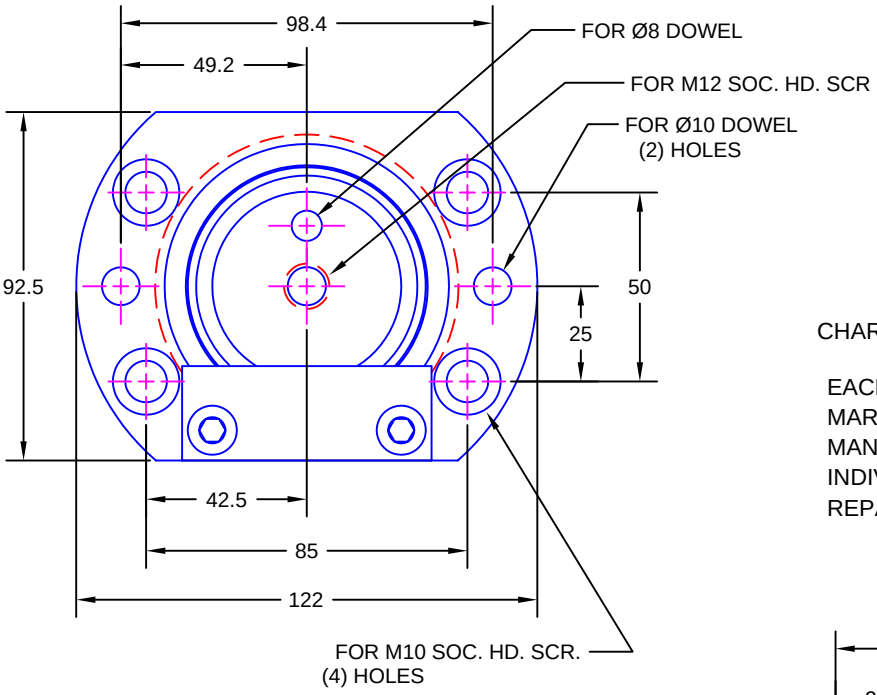



PART NUMBER	S	C	X	L
WDX35-80-2703050	50	101	95	196
WDX35-80-2703080	80	131	125	256
WDX35-80-2703100	100	151	145	296
WDX35-80-2703125	125	176	170	346
WDX35-80-2703150	150	201	195	396

CHARING PRESSURE IS 150 BAR/2175 psi. MAX.

EACH GAS SPRING MUST BE PERMANENTLY MARKED WITH FORD PART NUMBER, MANUFACTURER'S NAME OR LOGO, INDIVIDUAL SERIAL NUMBER AND REPAIR KIT NUMBER.


FOR APPLICATION SEE W-DX9-50M PAGE 8

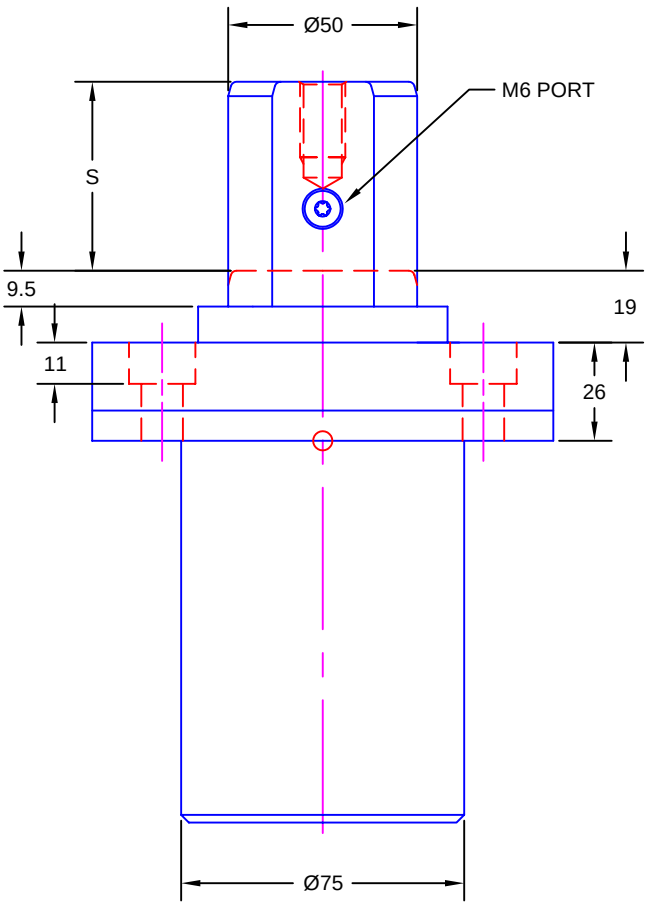

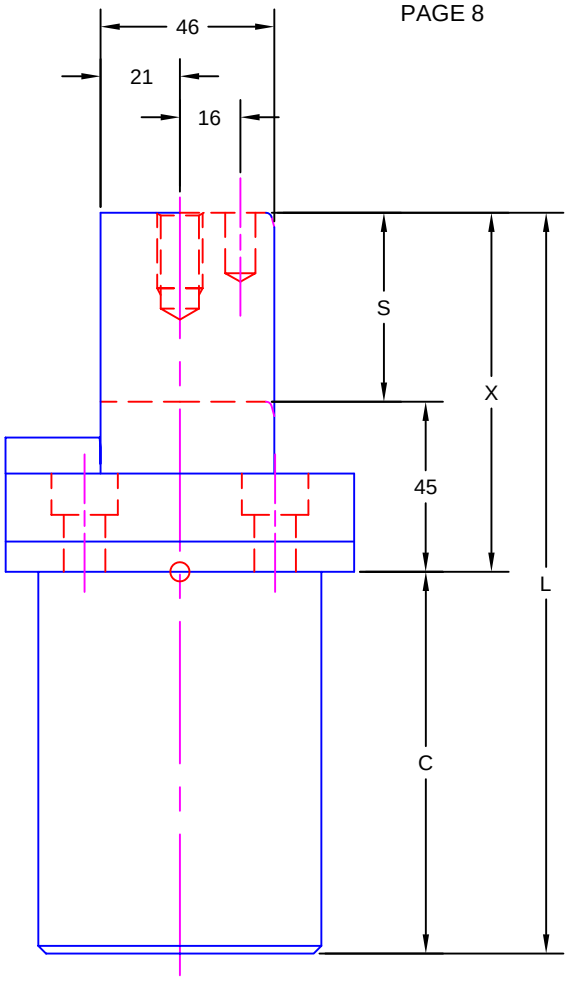

NORTH AMERICA ONLY

FITTINGS FOR ISO NO GROW NITROGEN GAS SPRINGS EXTENSION TUBING

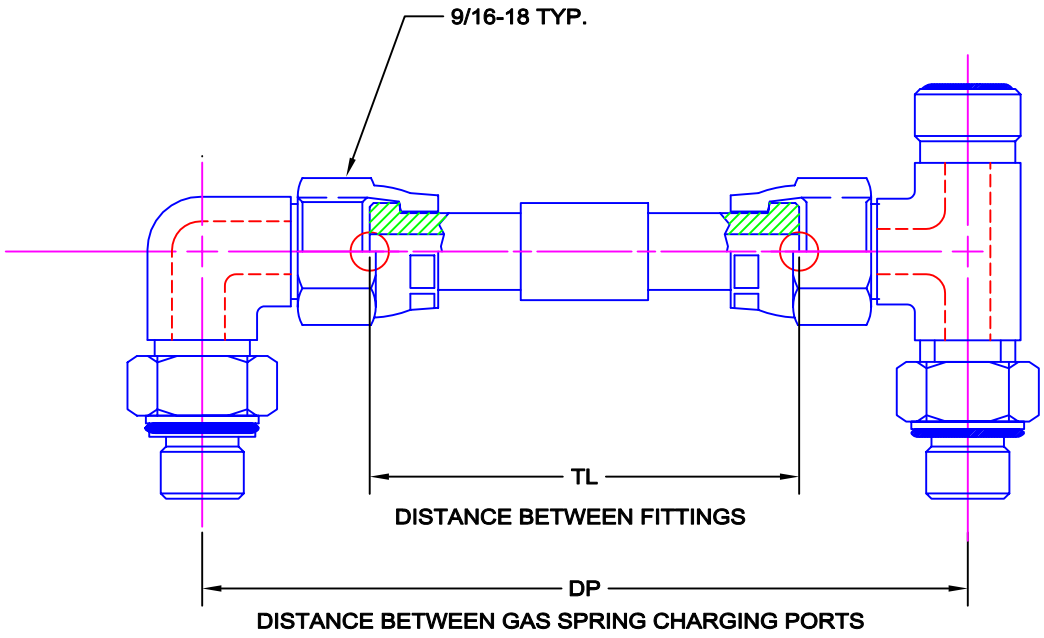


FORD NUMBER	DP	TL
WDX35-80-28075	75	31.8
WDX35-80-28100	100	56.8
WDX35-80-28120	120	76.8
WDX35-80-28125	125	81.8
WDX35-80-28130	130	86.8
WDX35-80-28140	140	96.8
WDX35-80-28150	150	106.8

NORTH AMERICA ONLY

NITROGEN CONTROL PANEL (3 PORTS)

CONTROL PANELS WILL BE SUPPLIED WITH ONE G 1/8 TO 9/16"-18 CONNECTOR.
FITTING TO HAVE PLASTIC CAP FOR SHIPPING.
PROVIDED SHEET METAL GUARD TO PROTECT GAGES AND VALVES.
GUARD TO BE PAINTED SAFETY GREEN COLOR MUNSELL NO. 7.5G4/8.
PROVIDED SAFETY STICKER ON TOP OF CONTROL PANEL. SEE WDX35-6M PAGE 5.

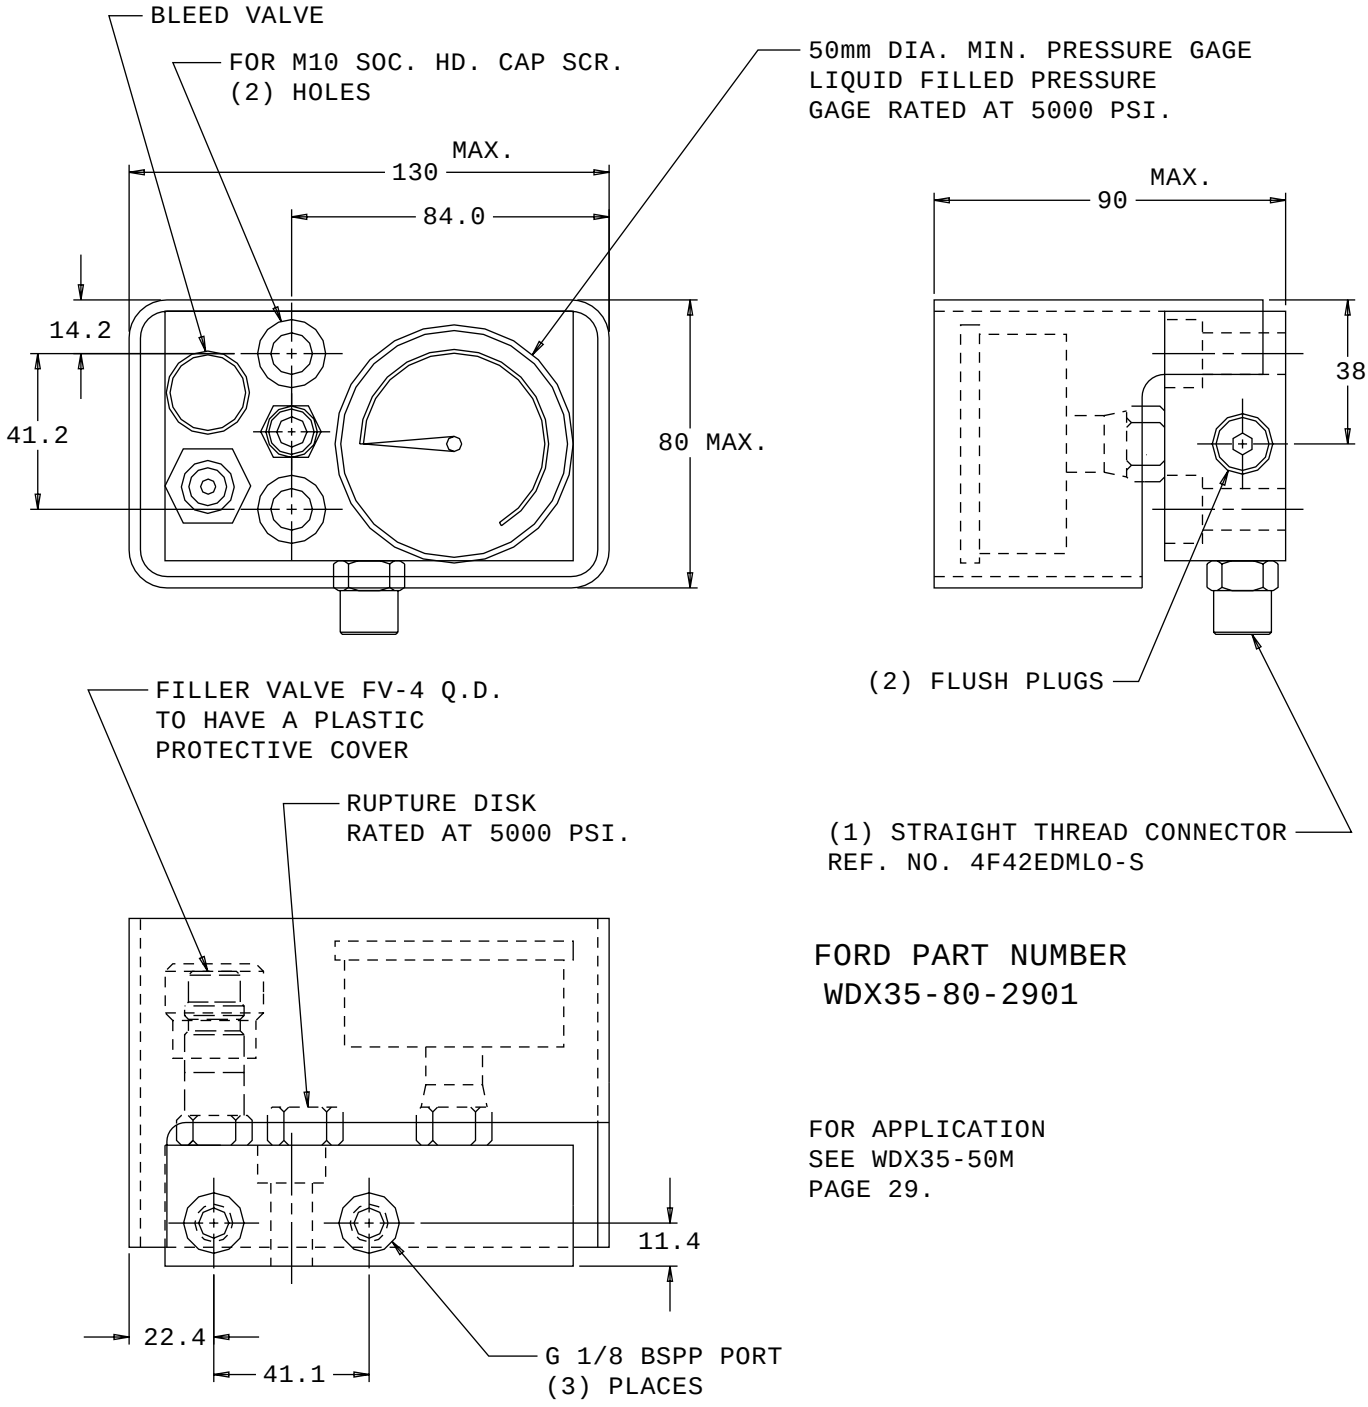


FORD PART NUMBER
WDX35-80-2901

FOR APPLICATION SEE WDX35-50M PAGE 29.

NORTH AMERICA ONLY

MULTIPLE NITROGEN CONTROL PANEL


EACH MODULE FEATURES A SIMPLE TWO POSITION VALVE FOR EASE OPERATION.
EACH MODULE HAS THREE PORT LOCATION FOR MAXIMUM PIPING FLEXIBILITY.
EACH MODULE IS SUPPLIED WITH A STRAIGHT SERVICE FITTING AND TUBE END CAP.
ALL UNUSED PORTS WILL BE SUPPLIED WITH A FLUSH PLUG.
A TOP GUARD BE SUPPLIED WITH EACH CONTROL PANEL (GUARD NOT SHOWN) .

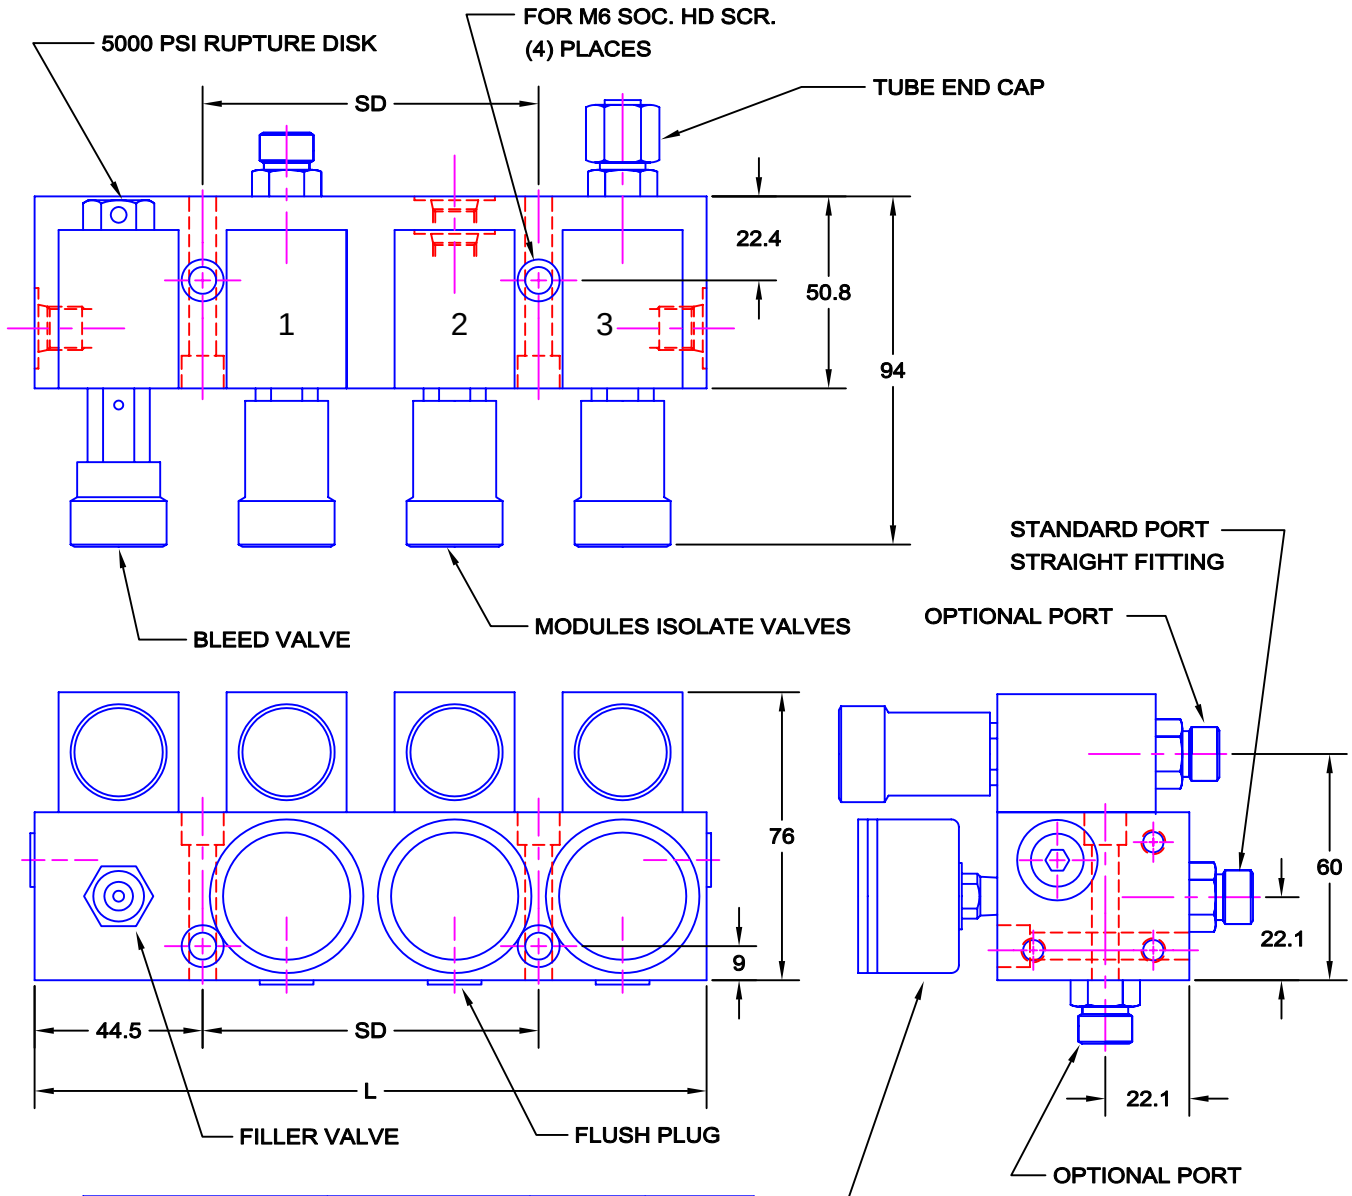

PART NUMBER	NO. MODULES	"L"	SD
WDX35-80-3002	2	133.5	44.5
WDX35-80-3003	3	178.0	89.0
WDX35-80-3004	4	222.5	133.5
WDX35-80-3005	5	267.0	178.0
WDX35-80-3006	6	311.5	222.5
WDX35-80-3008	8	400.5	311.5
WDX35-80-3010	10	489.5	400.5

NORTH AMERICA ONLY

M16 THREADED BODY NITROGEN GAS SPRING

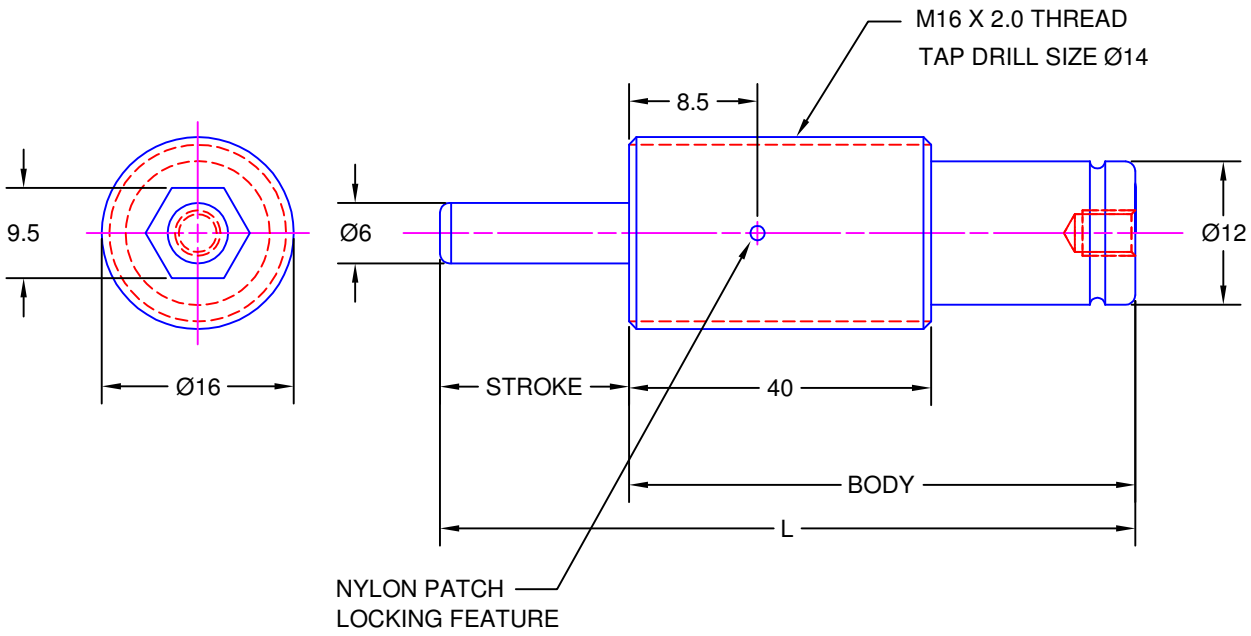

FORD PART NUMBER	STROKE	BODY	L
WDX35-80-3107__	07	49	56
WDX35-80-3115__	15	57	72
WDX35-80-3125__	25	67	92
WDX35-80-3138__	38	80	118
WDX35-80-3150__	50	92	142

FORCE CHART				
CODE	COLOR	INITIAL lb.	FINAL lb.	PRESSURE (psi.)
02	YELLOW	112	166	2560
03	RED	085	124	1920
04	BLUE	056	83	1280
05	GREEN	028	41	644
06	BLACK	SEE CHART BELOW		

ORDERING EXAMPLE:

WDX35-80-31 25 06- 500

- 500 — O6-BLACK ADJUSTABLE SPECIFY PRESSURE 0 - 2560 PSI
- 06- — FORCE CODE (02, 03, 04, 05 AND 06)
- 25 — STROKE LENGTH

FORCE 0N CONTACT ADJUSTABLE BLACK	
PRESSURE (psi.)	FORCE (lb.-f)
2560	177
2200	96
1750	88
1500	77
1000	44
500	22
260	11


P = F / .044 F = P X .044

NORTH AMERICA ONLY

ISO NO–GROW NITROGEN GAS SPRINGS
REMOVABLE SQUARE FLANGE MOUNT "RM"
PIPED SYSTEM CODE "P" OR SELF CONTAINED CODE "S"

SQUARE FLANGE MOUNT IS TO BE PROVIDED WITH A TAP HANDLING HOLE.

* NOTE ANGLE FOR CODE 07 SQUARE FLANGE MOUNT IS 28°

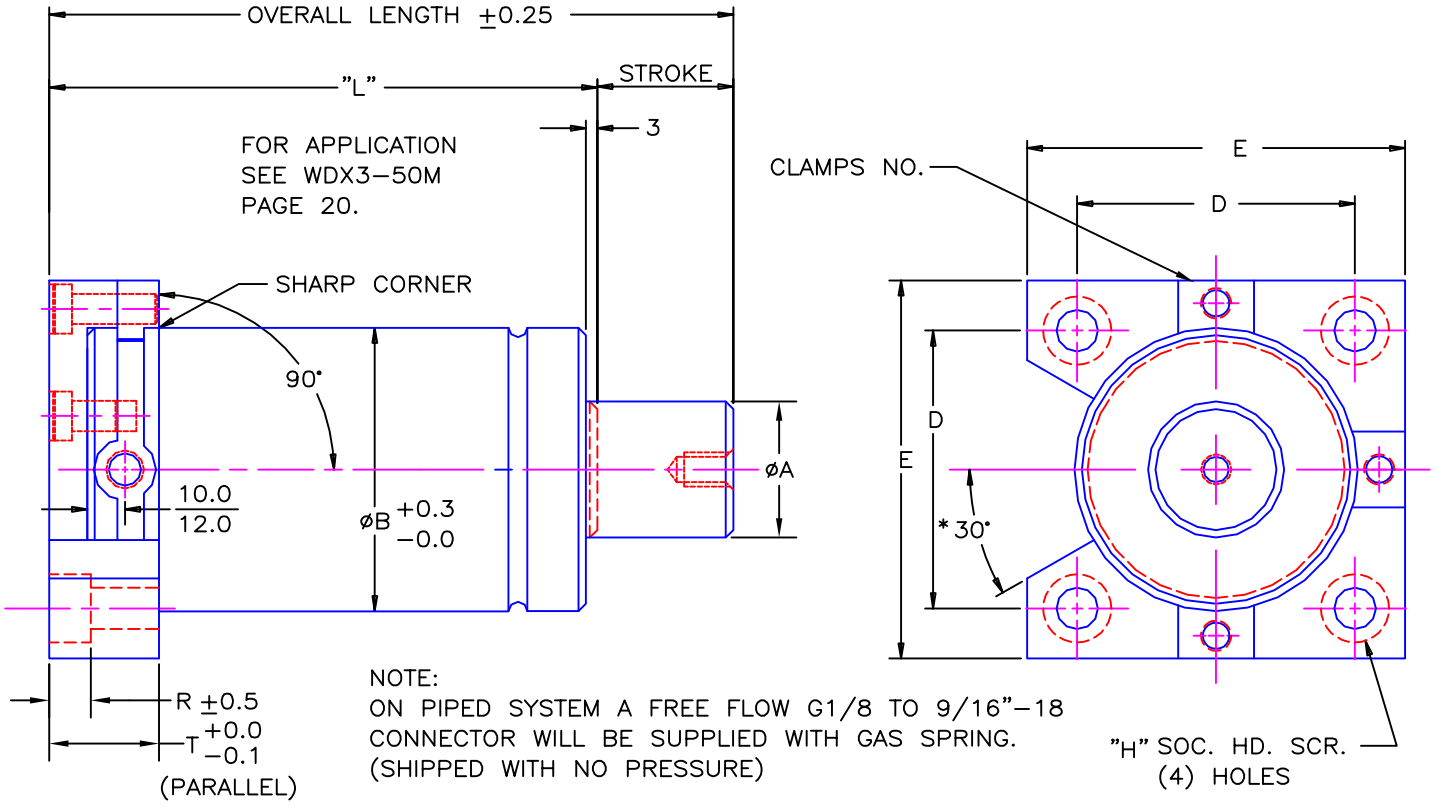

NOTE:
ON PIPED SYSTEM A FREE FLOW G1/8 TO 9/16"–18 CONNECTOR WILL BE SUPPLIED WITH GAS SPRING. (SHIPPED WITH NO PRESSURE)

PART NUMBER	A	B	D	E	H	R	T	"L"	CLAMPS
WDX358032–07––RM–	25	50	56.5	80	M10	11	30	105 + STROKE	3
WDX358032–15––RM–	36	75	73.5	100	M10	11	30	120 + STROKE	4
WDX358032–30––RM–	50	95	92.0	120	M12	13	30	130 + STROKE	4
WDX358032–50––RM–	65	120	109.5	140	M12	13	30	150 + STROKE	4
WDX358032–75––RM–	80	150	138.0	190	M16	17	30	165 + STROKE	4

SAFETY NOTE:
ON GAS SPRINGS WITH BENT, STUCK OR BROKEN PISTON RODS, QUALIFIED PERSONNEL MUST RELIEVE THE GAS PRESSURE BEFORE WORKING ON IT.

ORDERING EXAMPLE

WDX358032 50 05 RM P

- WDX358032 — FORD BASIC PART NUMBER
- 50 — CYLINDER SIZE
- 05 — CYLINDER STROKE
- RM — TYPE OF MOUNTING
- P — PIPED SYSTEM CODE (P) SELF CONTAINED CODE (S)

CODE	STROKE
02	25
05	50
08	80
10	100
12	125
16	160

CODE	CYL. SIZE
07	7,500 N
15	15,000 N
30	30,000 N
50	50,000 N
75	75,000 N

NORTH AMERICA ONLY


COMPACT NITROGEN GAS SPRINGS

REMOVABLE SQUARE FLANGE MOUNT "RM"

PIPED SYSTEM CODE "P" OR SELF CONTAINED CODE "S"

COMPACT SERIES IS TO BE USED ON APPROVAL ONLY WHEN DIE CONDITIONS PREVENT STANDARD GAS SPRING FROM BEING USED. COMPACT GAS SPRING HAS A SHORTER BEARING AND WILL NOT LAST AS LONG AS STANDARD GAS SPRING.

NOTE:
USAGE RESTRICTED TO LOWER PAD APPLICATIONS IN STRETCH DRAW AND FLANGE DIES ONLY.

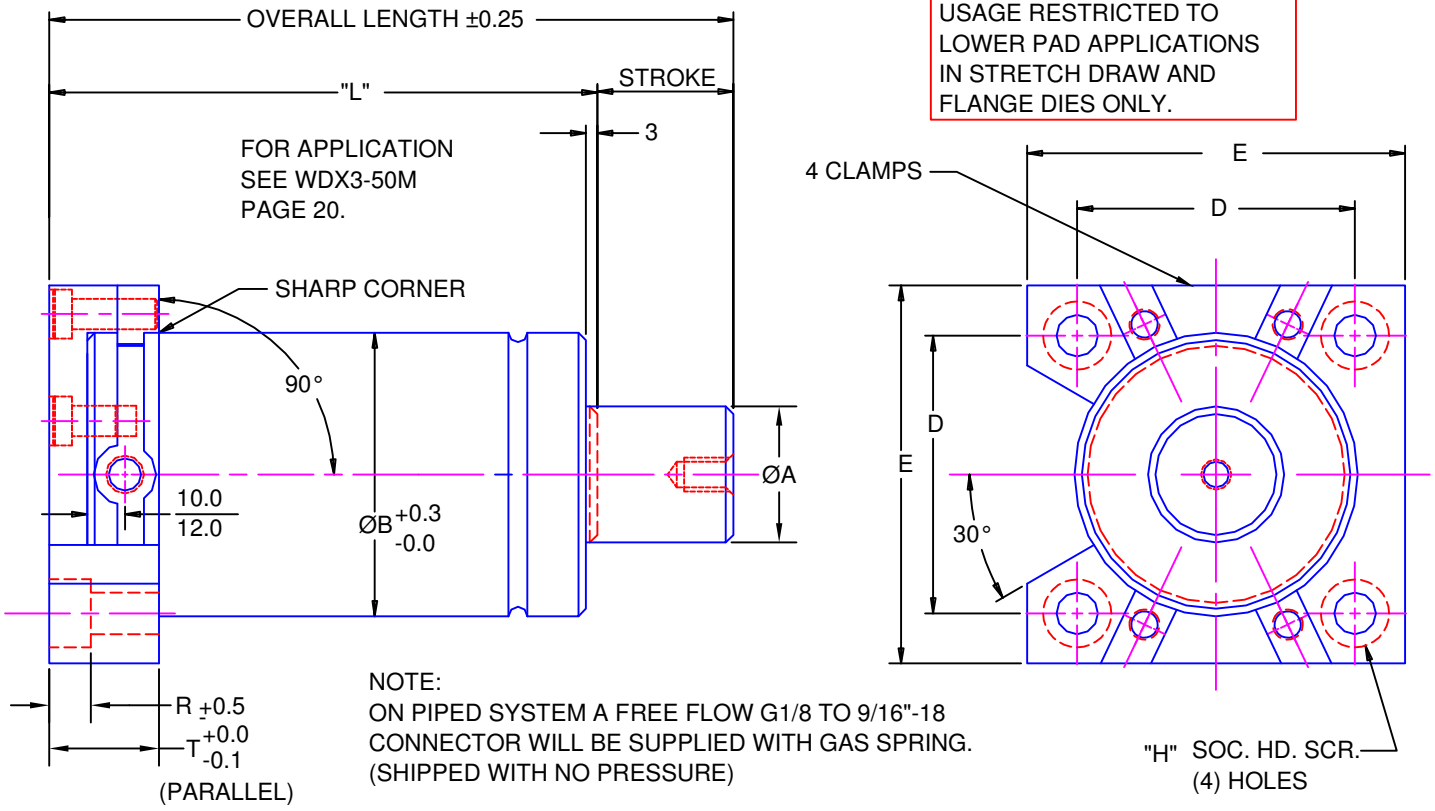

NOTE:
ON PIPED SYSTEM A FREE FLOW G1/8 TO 9/16"-18 CONNECTOR WILL BE SUPPLIED WITH GAS SPRING. (SHIPPED WITH NO PRESSURE)

PART NUMBER	A	B	D	E	H	R	T	"L"
WDX358033-30--RM-	50	95	92.0	120	M12	13	30	68 + STROKE
WDX358033-50--RM-	65	120	109.5	140	M12	13	30	78 + STROKE
WDX358033-75--RM-	80	150	138.0	190	M16	17	30	88 + STROKE

ORDERING EXAMPLE

WDX358033 50 05 RM P

- P — PIPED SYSTEM CODE (P) SELF CONTAINED CODE (S)
- RM — TYPE OF MOUNTING
- 05 — CYLINDER STROKE
- 50 — CYLINDER SIZE
- WDX358033 — FORD BASIC PART NUMBER


CODE	STROKE
02	25
05	50
08	80
10	100
12	125


CODE	CYL. SIZE
30	30,000 N
50	50,000 N
75	75,000 N

SAFETY NOTE:
ON GAS SPRINGS WITH BENT, STUCK OR BROKEN PISTON RODS, QUALIFIED PERSONAL MUST RELIEVE THE GAS PRESSURE BEFORE WORKING ON IT.

NORTH AMERICA ONLY

SPACER PLATE
FOR STEPPING NITROGEN GAS SPRINGS.

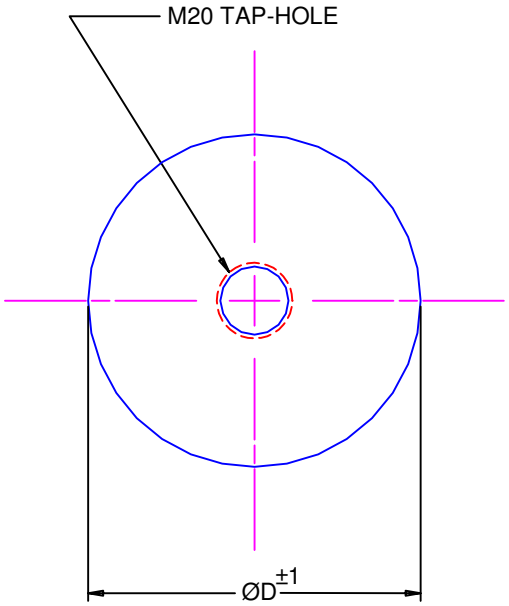

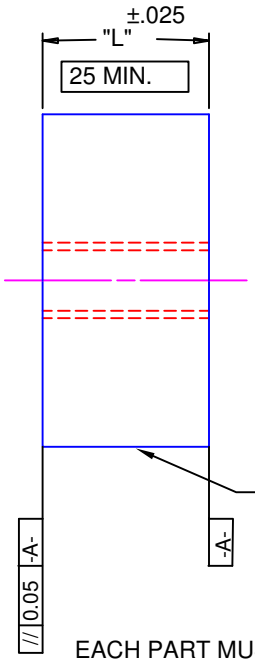


SIZE	"D"	FORD PART NUMBER
5 TON	120	WDX35-80-3450
8 TON	150	WDX35-80-3475

EACH PART MUST BE PERMANENTLY MARKED WITH THE FULL ORDERING NUMBER MANUFACTURER'S BRAND AND BLOCK THICKNESS.


ORDERING EXAMPLE:
WDX35-80-3450 - L43

SPECIFY "L" DIMENSION WHEN ORDERING. ORDER "L" DIMENSION IN 3mm INCREMENTS.

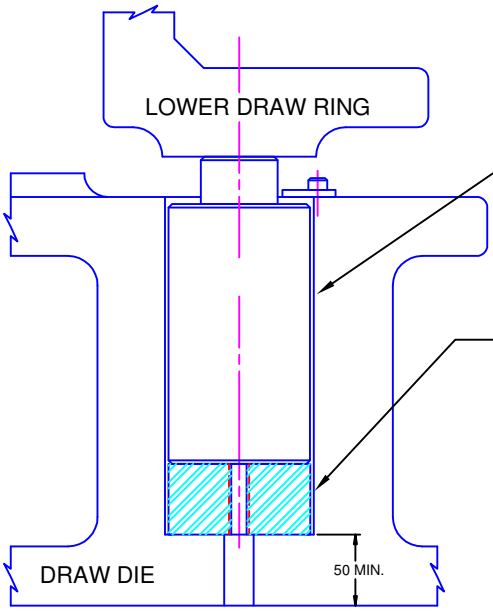

STRIKER PLATE

FOR STEPPING NITROGEN GAS SPRINGS

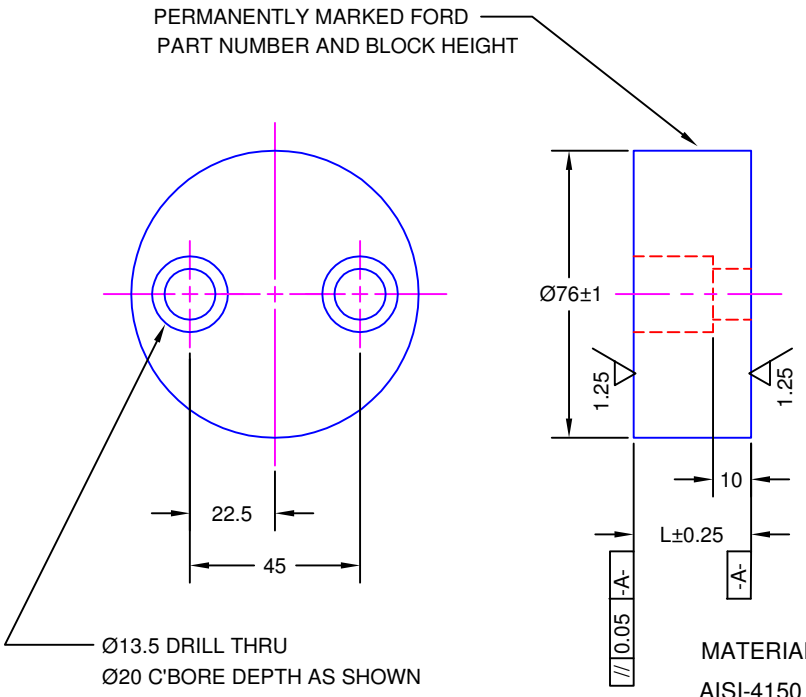

MATERIAL SPECIFICATIONS:

AISI-4150 OR 6150, SURFACE HARDEN
Rc 48-55, CASE DEPTH 0.8 MIN.


EACH PART MUST BE PERMANENTLY MARKED WITH THE FULL ORDERING NUMBER AND MANUFACTURER'S BRAND.

TOLERANCE BETWEEN SCREW HOLES ± 0.12

ALL DIMENSIONS ARE ± 0.25 UNLESS OTHERWISE NOTED.


BREAK ALL SHARP EDGES 0.5 X 45°

PART NUMBER	"L"
WDX35-80-357625	25.00
WDX35-80-357628	28.00
WDX35-80-357631	31.00
WDX35-80-357634	34.00
WDX35-80-357637	37.00
WDX35-80-357640	40.00

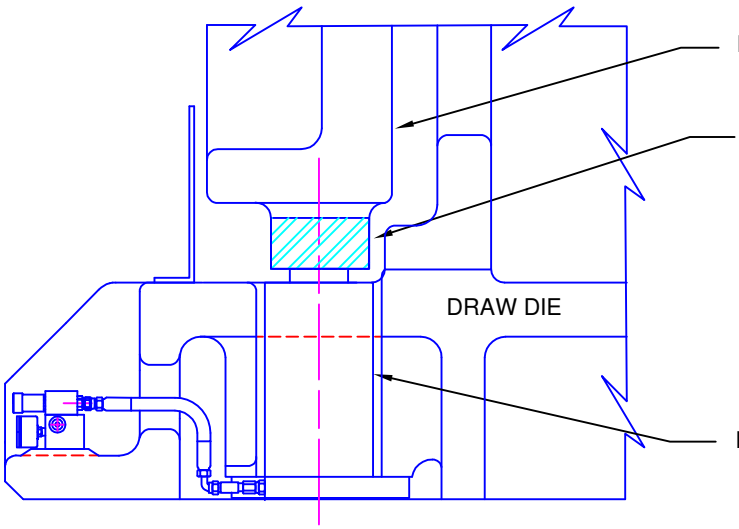

NORTH AMERICA ONLY

MIRCO 90 NARROW FLANGE MOUNT NITROGEN GAS SPRING

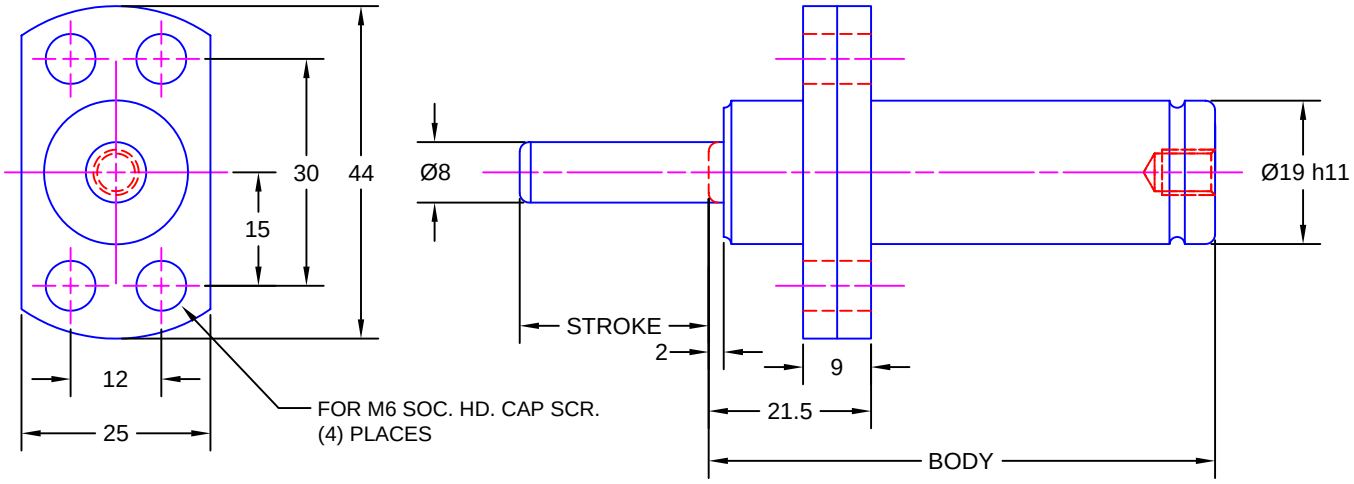

FORD PART NUMBER	STROKE	BODY	H
WDX35-80-3607__	07	49	56
WDX35-80-3615__	15	57	72
WDX35-80-3625__	25	67	92
WDX35-80-3638__	38	80	118
WDX35-80-3650__	50	92	142

FORCE CHART				
CODE	COLOR	INITIAL lb.	FINAL lb.	PRESSURE (psi.)
02	YELLOW	200	256	2560
03	RED	150	192	1920
04	BLUE	100	128	1280
05	GREEN	050	64	640
06	BLACK	SEE CHART BELOW		

ORDERING EXAMPLE:
WDX35-80-36 38 06 - 1500

- 06 - 1500 → O6-BLACK ADJUSTABLE SPECIFY PRESSURE 0 - 2560 PSI
- 06 → FORCE CODE (02, 03, 04, 05 AND 06)
- 38 → STROKE LENGTH


FORCE 0N CONTACT ADJUSTABLE BLACK	
PRESSURE (psi.)	FORCE (lb.-f)
2560	200
2200	172
2000	156
1750	137
1500	117
1000	78
500	39


P = F / .078 F = P X .078

NORTH AMERICA ONLY

LOW IMPACT NITROGEN GAS SPRINGS
REMOVABLE SQUARE FLANGE MOUNT "RM"
PIPED SYSTEM CODE "P" OR SELF CONTAINED CODE "S"

NOTE:
USAGE RESTRICTED TO LOWER PAD APPLICATIONS IN STRETCH DRAW AND FLANGE DIES ONLY.

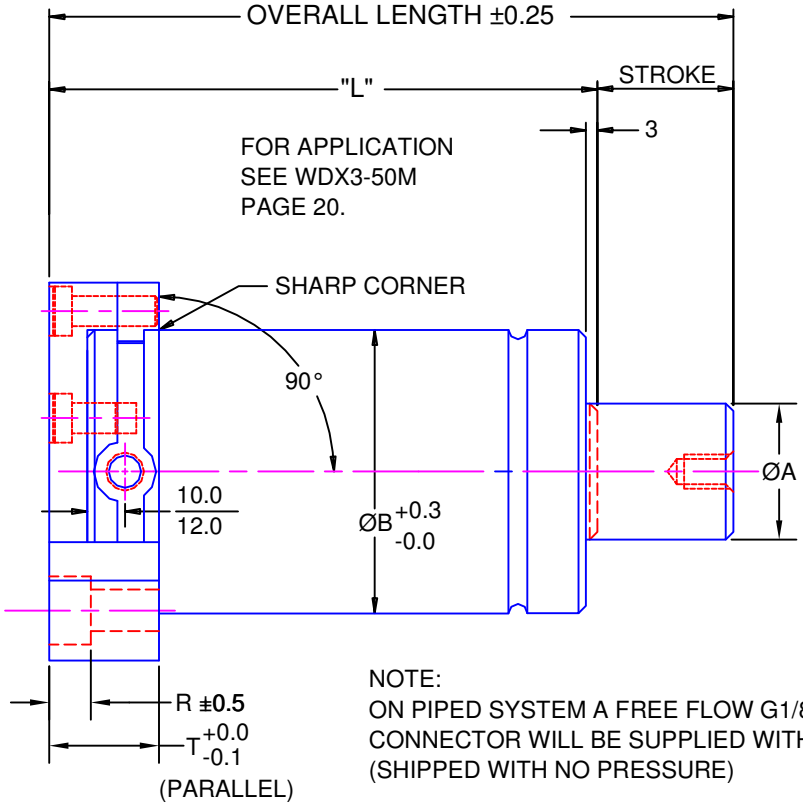

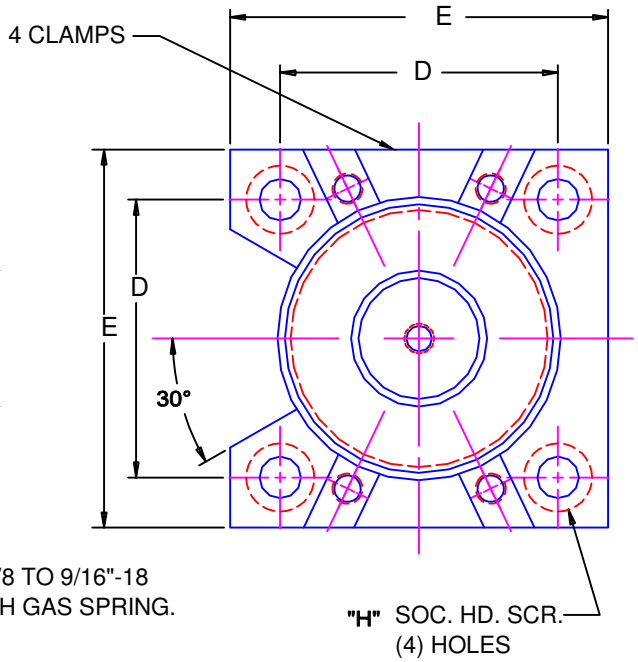

NOTE:
ON PIPED SYSTEM A FREE FLOW G1/8 TO 9/16"-18 CONNECTOR WILL BE SUPPLIED WITH GAS SPRING. (SHIPPED WITH NO PRESSURE)

PART NUMBER	A	B	D	E	H	R	T	"L"
WDX358038-30--RM-	50	95	92.0	120	M12	13	30	130 + STROKE
WDX358038-50--RM-	65	120	109.5	140	M12	13	30	150 + STROKE
WDX358038-75--RM-	80	150	138.0	190	M16	17	30	165 + STROKE

ORDERING EXAMPLE

WDX358038 50 05 RM P

- WDX358038 — FORD BASIC PART NUMBER
- 50 — CYLINDER SIZE
- 05 — CYLINDER STROKE
- RM — TYPE OF MOUNTING
- P — PIPED SYSTEM CODE (P) SELF CONTAINED CODE (S)

CODE	STROKE
02	25
05	50
08	80
10	100
12	125
16	160


CODE	CYL. SIZE
07	7,500 N
15	15,000 N
30	30,000 N
50	50,000 N
75	75,000 N

SAFETY NOTE:
ON GAS SPRINGS WITH BENT, STUCK OR BROKEN PISTON RODS, QUALIFIED PERSONNEL MUST RELIEVE THE GAS PRESSURE BEFORE WORKING ON IT.

NORTH AMERICA ONLY

HORIZONTAL FOOT MOUNT MICRO 250

FOR APPLICATION
SEE W-DX7-56M
PAGE 9

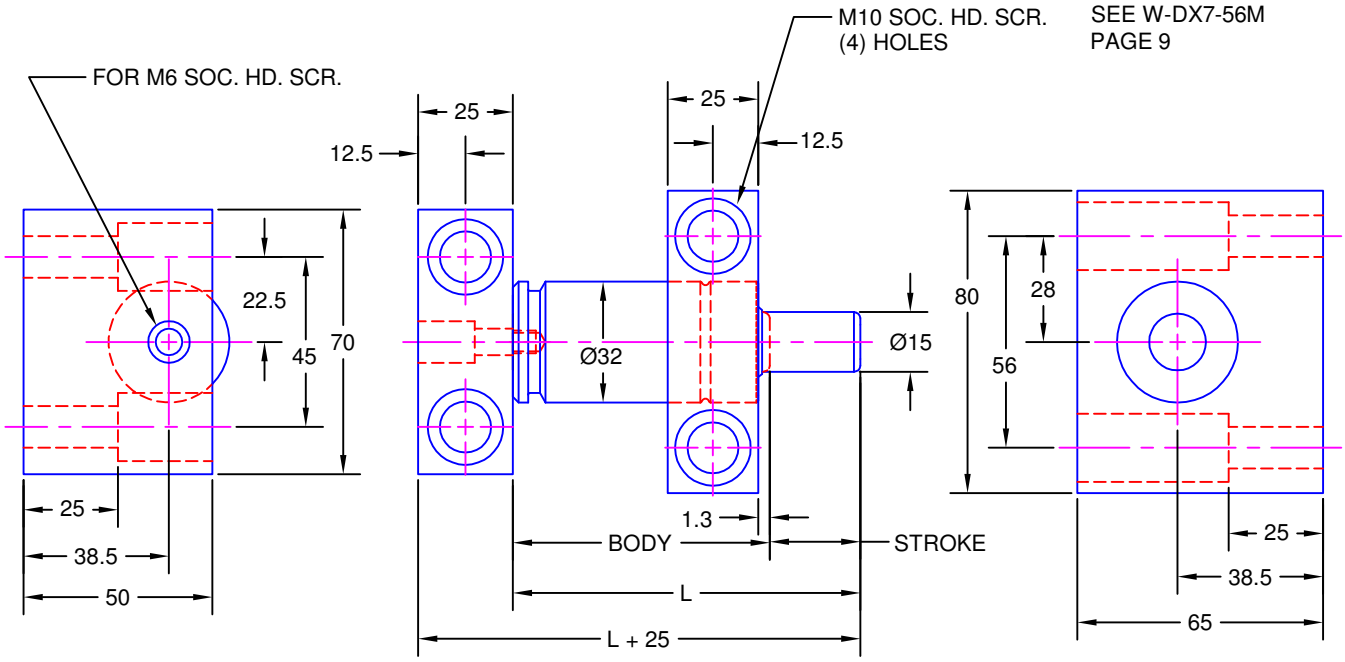

FORD PART NUMBER	STROKE	BODY	L
WDX35-80-4007__	07	49	56
WDX35-80-4015__	15	57	72
WDX35-80-4025__	25	67	92
WDX35-80-4038__	38	80	118
WDX35-80-4050__	50	92	142

FORCE CHART				
CODE	COLOR	INITIAL lb.	FINAL lb.	PRESSURE (psi.)
02	YELLOW	701	940	2560
03	RED	526	705	1920
04	BLUE	351	470	1280
05	GREEN	175	235	640
06	BLACK	SEE CHART BELOW		

ORDERING EXAMPLE:

WDX35-80-40 25 06- 500


- 500 — O6-BLACK ADJUSTABLE SPECIFY PRESSURE 0 - 2560 PSI
- 06- — FORCE CODE (02, 03, 04, 05 AND 06)
- 25 — STROKE LENGTH

EACH GAS SPRING MUST BE PERMANENTLY MARKED WITH FORD PART NUMBER, MANUFACTURER'S NAME OR LOGO, INDIVIDUAL SERIAL NUMBER AND REPAIR KIT NUMBER.

FORCE 0N CONTACT ADJUSTABLE BLACK	
PRESSURE (psi.)	FORCE (lb.-f)
2560	701
2200	603
2000	548
1750	479
1500	411
1000	274
500	137

P = F / .044 F = P X .044

PIPING FOR NITROGEN SYSTEM

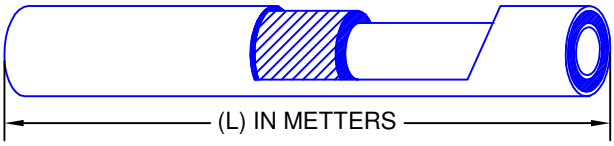

HIGH PRESSURE HOSE

FORD PART NUMBER
WDX35-80-500613-

SPECIFY HOSE (L) LENGTH IN METERS

MEETS OR EXCEEDS SAE 100R8 SPECIFICATIONS


HOSE I.D.	6.35 (1/4 IN.)
HOSE O.D.	12.95 (.51 IN.)
MAXIMUM WORKING PRESSURE (PSI)	5000
MINIMUM BURST PRESSURE (PSI)	20000
MINIMUM BEND RADIUS	51 (2.0 IN.)
WEIGHT (LBS./100FT.)	6.5
TEMPERATE RANGE (F)	-40F TO +200F (-40C TO +93C)
USE PERMANENT SWAGE FITTINGS	55 SERIES
FOR REPLACEMENT ONLY 51 REUSABLE FITTINGS	51 SERIES

REFERENCE SAE 100R8 1/4 W.P. 5000 PSI, PARKER 520N-4, DADCO 90.400 OR EQUIVALENT

NOTE:

FOR CRIMP INSTALLATION USE DIE NUMBER 80C-P04 CRIMP DIAMETER (.560/.580 IN.)

WHEN ORDERING HOSING, ORDER EXTRA 15 mm TO ALLOW FOR HOSE MOVEMENT DURING PRESSURE CYCLING. MINIMUM HOSE LENGTH BETWEEN CRIMPED FITTINGS SHOULD BE 20 mm MINIMUM.

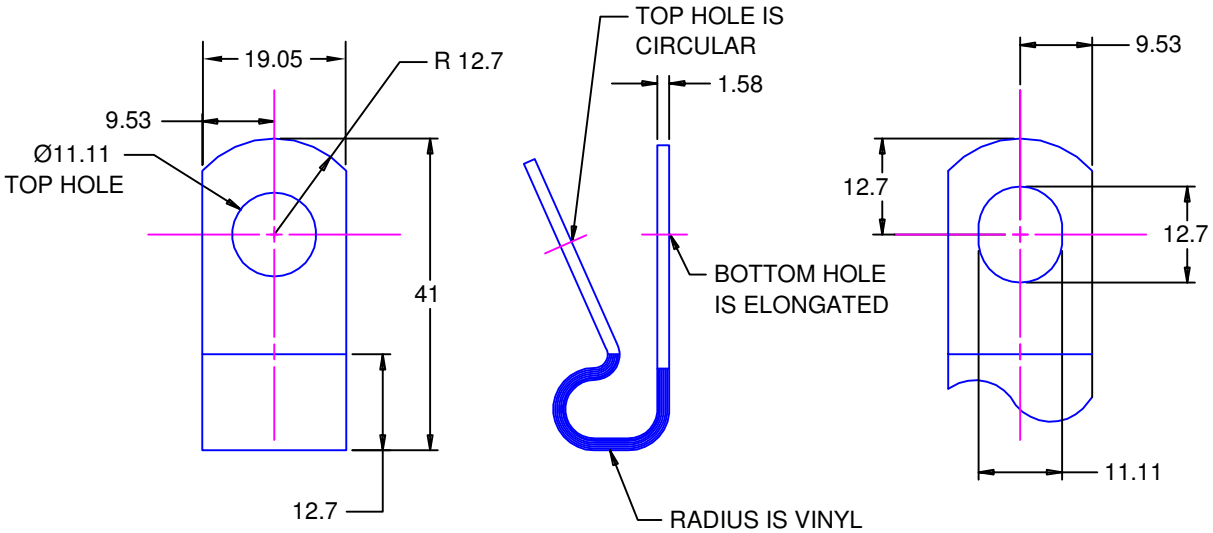

HOSE CLAMP

FORD PART NUMBER
WDX35-80-501941


REFERENCE NAAMS CODE N910000, PARKER NO. CL-9, DADCO 90.504.250 OR EQUIVALENT

FOR APPLICATION SEE W-DX35-50M PAGES 33 THRU 35

NOTE: USE FORD WDX PART NUMBER ON ESP REPORT

NORTH AMERICA ONLY


PIPING FOR NITROGEN SYSTEM

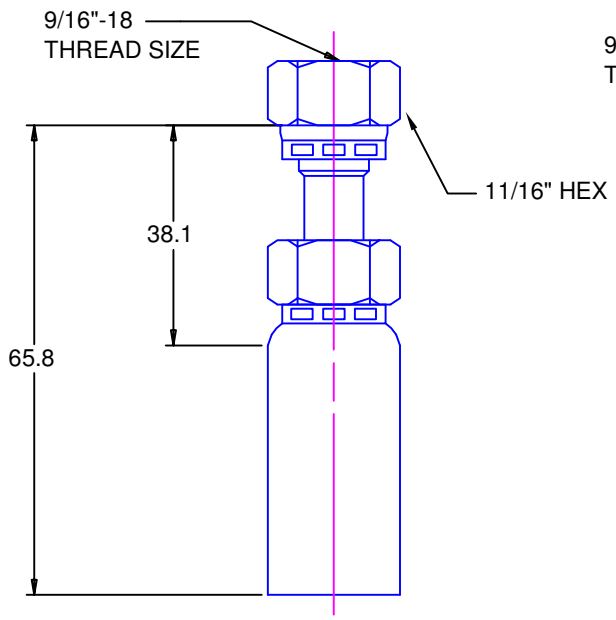

SEAL-LOK STRAIGHT

FORD PART NUMBER
WDX35-80-51001466


REFERENCE
NAAMS CODE N514400,
PARKER NO. 1JS5544S
OR EQUIVALENT

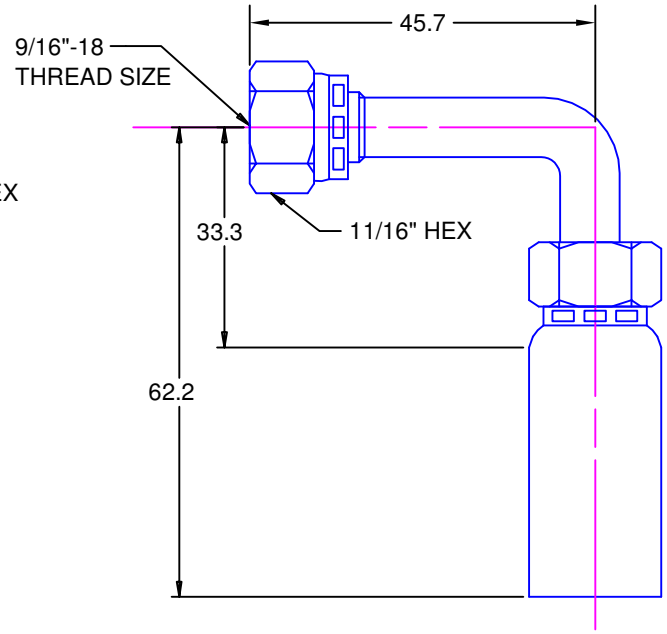

SEAL-LOK 90° ELBOW (LONG)

FORD PART NUMBER
WDX35-80-51901462

REFERENCE
NAAMS CODE N514490,
PARKER NO. 1J15544S
OR EQUIVALENT

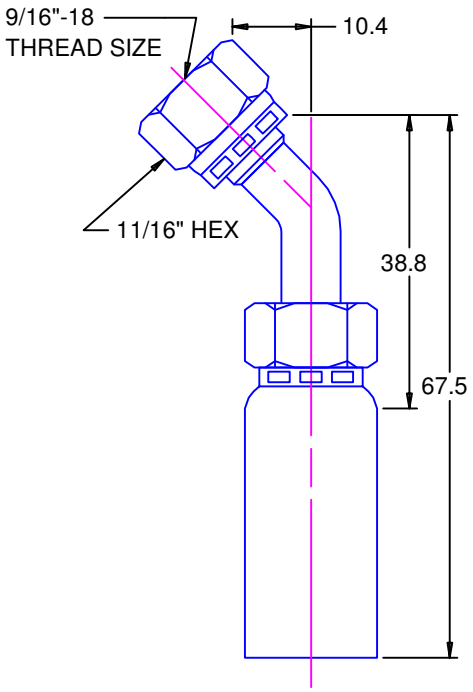


SEAL-LOK 45° ELBOW

FORD PART NUMBER
WDX35-80-51451468

REFERENCE
PARKER NO. 1J75544S
DADCO 90.504.754
OR EQUIVALENT

FOR APPLICATION
SEE W-DX35-50M
PAGES 33 THRU 35

MATERIAL STEEL FITTINGS
USE FORD WDX PART NUMBER
IN THE ESP REPORT.

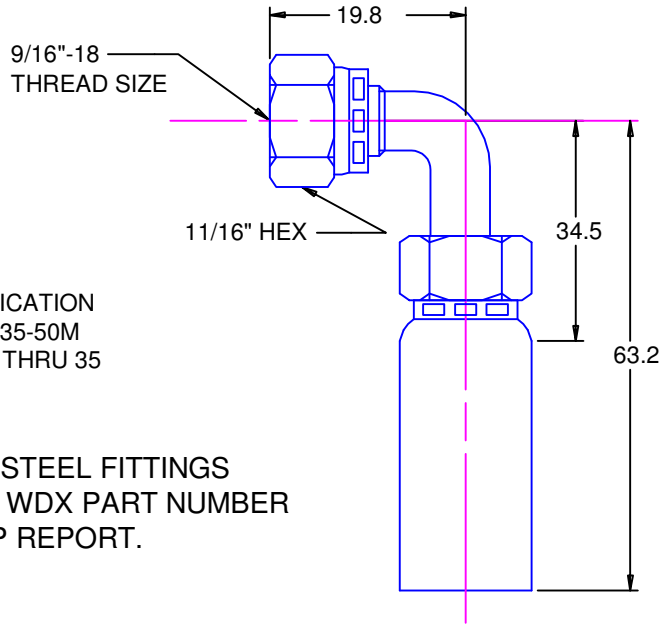


SEAL-LOK 90° ELBOW

FORD PART NUMBER
WDX35-80-51901463

REFERENCE
NAAMS CODE N514390,
PARKER NO. 1J95544S
OR EQUIVALENT

NORTH AMERICA ONLY


PIPING FOR NITROGEN SYSTEM

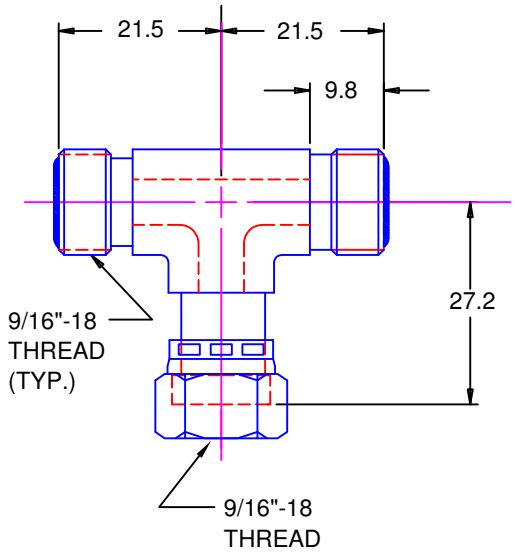

SWIVEL NUT BRANCH TEE

FORD PART NUMBER
WDX35-80-52001432


REFERENCE
NAAMS CODE N520433,
SAE NO. 4-4-520433-S
OR EQUIVALENT

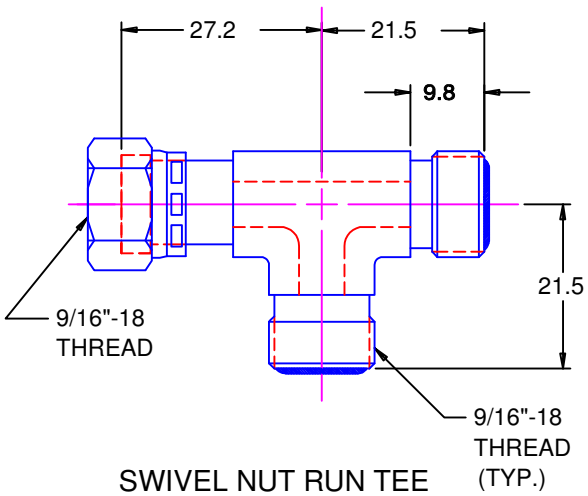

SWIVEL NUT RUN TEE

FORD PART NUMBER
WDX35-80-52001433

REFERENCE
NAAMS CODE N520432,
SAE NO. 4-4-520432-S
OR EQUIVALENT

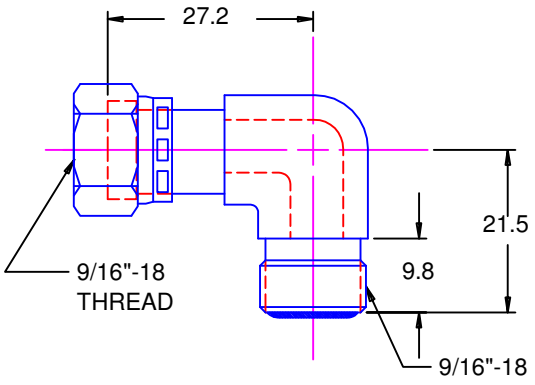

SWIVEL NUT ELBOW (TYP.) THREAD


FORD PART NUMBER
WDX35-80-52001421

REFERENCE
NAAMS CODE N520221,
SAE NO. 4-4-520221-S
OR EQUIVALENT

FOR APPLICATION
SEE W-DX35-50M
PAGES 33 THRU 35

MATERIAL STEEL FITTINGS
USE FORD WDX PART NUMBER
IN THE ESP REPORT.


PIPING FOR NITROGEN SYSTEM

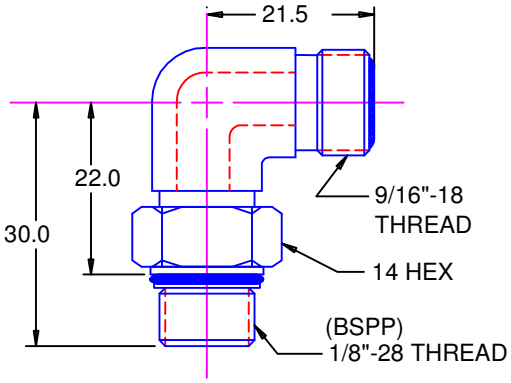

90° STRAIGHT THREAD ELBOW

FORD PART NUMBER
WDX35-80-53901430

REFERENCE
PARKER NO. 4C40MLOS,
DADCO 90.506.230
OR EQUIVALENT

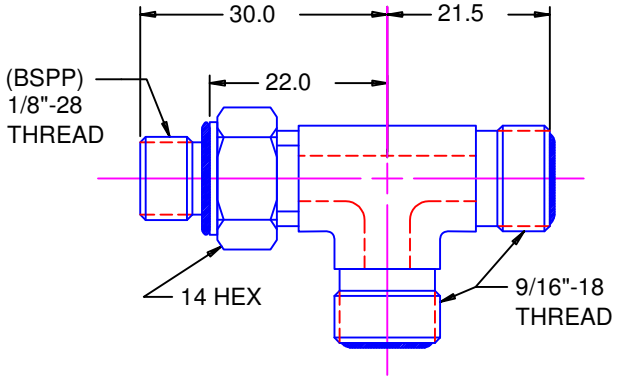


STRAIGHT THREAD RUN TEE

FORD PART NUMBER
WDX35-80-53001452

REFERENCE
PARKER NO. 4R40MLOS,
DADCO 90.505.438
OR EQUIVALENT

FOR APPLICATION
SEE W-DX35-50M
PAGES 33 THRU 35


MATERIAL STEEL FITTINGS
USE FORD WDX PART NUMBER
IN THE ESP REPORT.

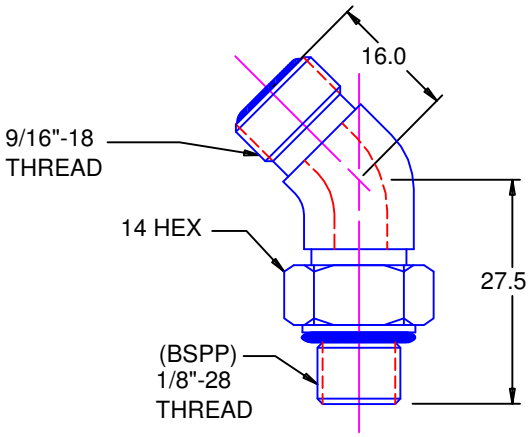

45° STRAIGHT THREAD ELBOW

FORD PART NUMBER
WDX35-80-53451430

REFERENCE
PARKER NO. 4V40MLOSS,
DADCO 90.505.330
OR EQUIVALENT

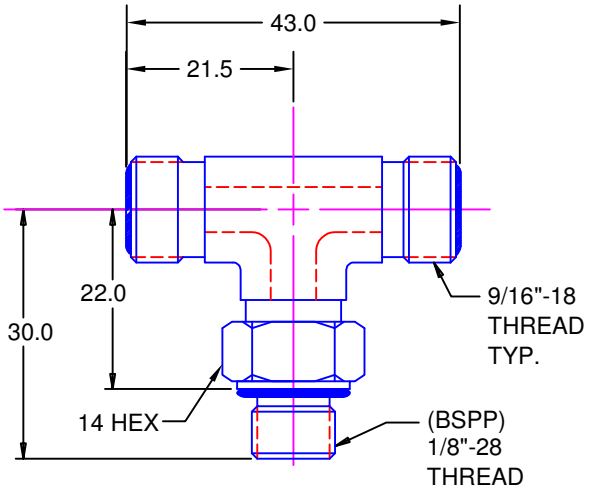


STRAIGHT THREAD BRANCH TEE

FORD PART NUMBER
WDX35-80-53001443

REFERENCE
PARKER NO. 4S40MLOS,
DADCO 90.506.439
OR EQUIVALENT


PIPING FOR NITROGEN SYSTEM

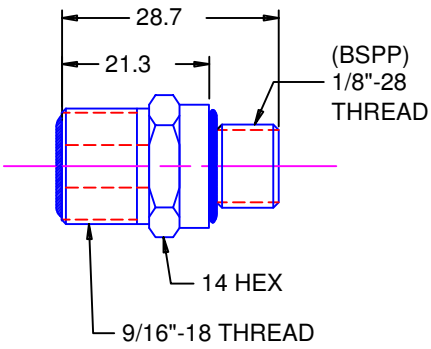

SHORT STRAIGHT CONNECTOR

FORD PART NUMBER
WDX35-80-54001429

REFERENCE
NAAMS CODE N520121,
DADCO 90.505.115
OR EQUIVALENT

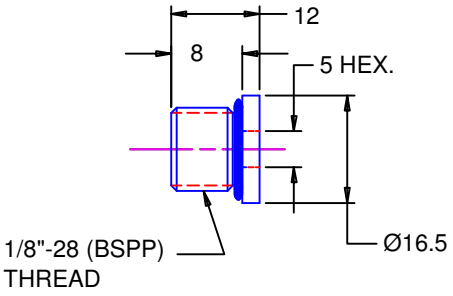


HEX FLUSH PLUG

FORD PART NUMBER
WDX35-80-54000312

REFERENCE
PARKER NO. VSTI1/8EDAC3S,
DADCO 90.505.110
OR EQUIVALENT

FOR APPLICATION
SEE W-DX35-50M
PAGES 33 THRU 35


MATERIAL STEEL FITTINGS
USE FORD WDX PART NUMBER
IN THE ESP REPORT.

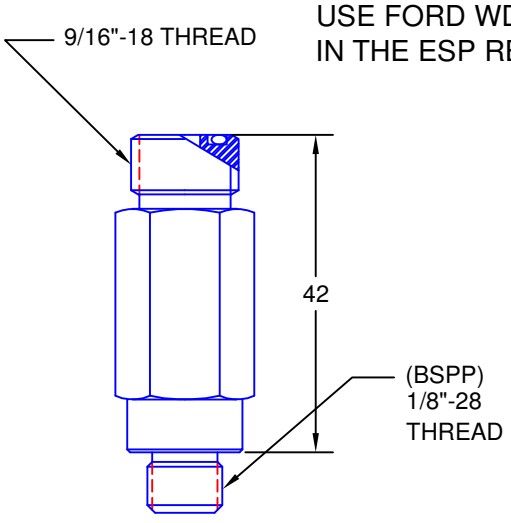

EXTENDED STRAIGHT CONNECTOR

FORD PART NUMBER
WDX35-80-54001442

REFERENCE
NAAMS CODE N520122,
DADCO 90.505.117
OR EQUIVALENT

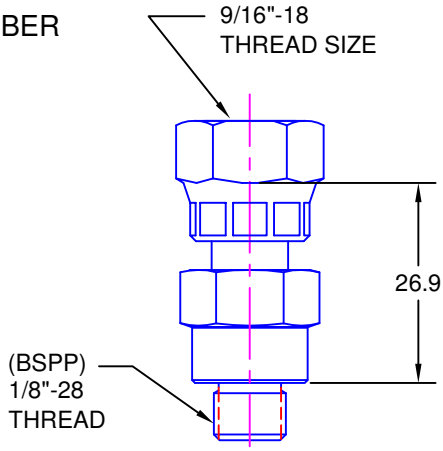


SWIVEL STRAIGHT CONNECTOR

FORD PART NUMBER
WDX35-80-54000327

REFERENCE
DADCO 90.505.121
OR EQUIVALENT

PIPING FOR NITROGEN SYSTEM

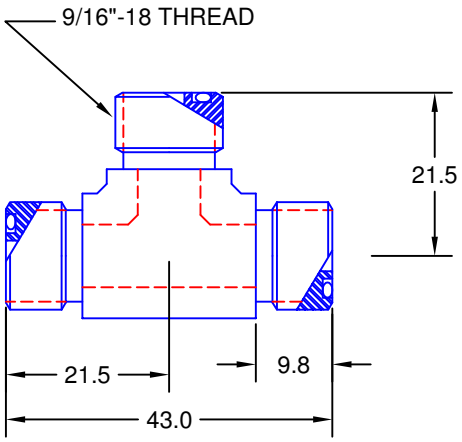


UNION TEE

FORD PART NUMBER
WDX35-80-55001443

REFERENCE
NAAMS CODE N520401,
DADCO 90.506.401
OR EQUIVALENT

FOR APPLICATION
SEE W-DX35-50M
PAGES 33 THRU 35

MATERIAL STEEL FITTINGS
USE FORD WDX PART NUMBER
IN THE ESP REPORT.

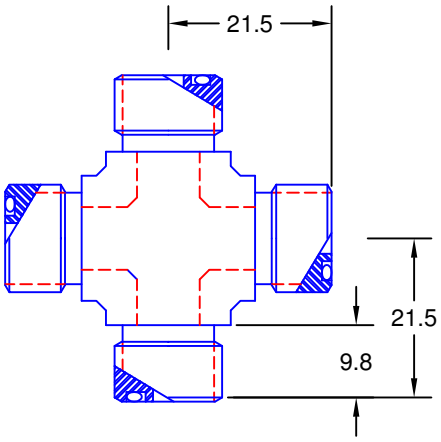

CROSS TEE

FORD PART NUMBER
WDX35-80-55901443

REFERENCE
NAAMS CODE N520501,
DADCO 90.506.501
OR EQUIVALENT