


NEST GUIDES (WITH MOUNTING PLATES, CONFIGURABLE SHAPE)
—ECONOMY TYPE—

RoHS



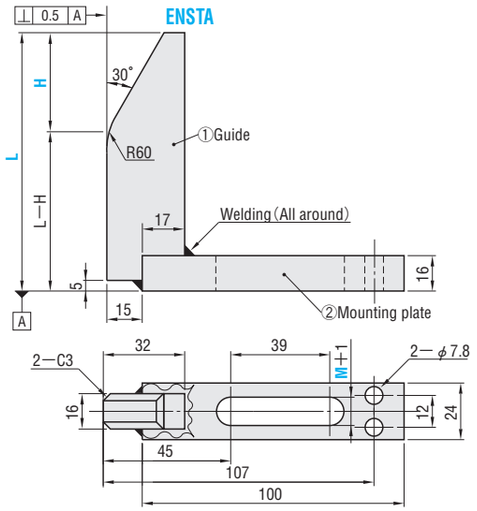

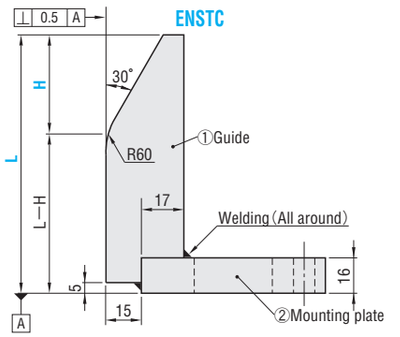

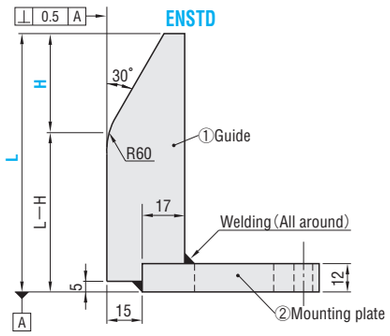

H is the dimension prior to R60 and GRC machining.

■Mounting bolts and other accessories

M	A
M10	CB10—35 (2 pcs.) Spring washer for M10 (2 pcs.)
M12	CB12—35 (2 pcs.) Spring washer for M12 (2 pcs.)

M ①②SS400

Catalog No.	L 5mm increments	H 5mm increments	Mounting bolt hole M	Base unit price 1～9 pieces
ENSTA ENSTC ENSTD	65～100 105～150 155～200	20～40	M10 (M12)	Quotation

M12 can be used for ENSTA only.
The guide ① and the mounting plate ② are fastened by welding only.

Order


Catalog No.	—	L	—	H	—	M
ENSTA	—	185	—	40	—	M10

Days to Ship: Quotation

Price: Quotation


Alterations


Catalog No.	—	L	—	H	—	M	—	(GRC)
ENSTA	—	185	—	40	—	M10	—	GRC20

Alteration	Code	Spec.	$/Code
	GRC	The corner R (R60) of the guide is reduced. R10 ～ 30 10mm increments	Quotation

NEST GUIDES (WITH MOUNTING PLATES, CONFIGURABLE LENGTH)
—REINFORCED TYPE / ECONOMY TYPE—

RoHS



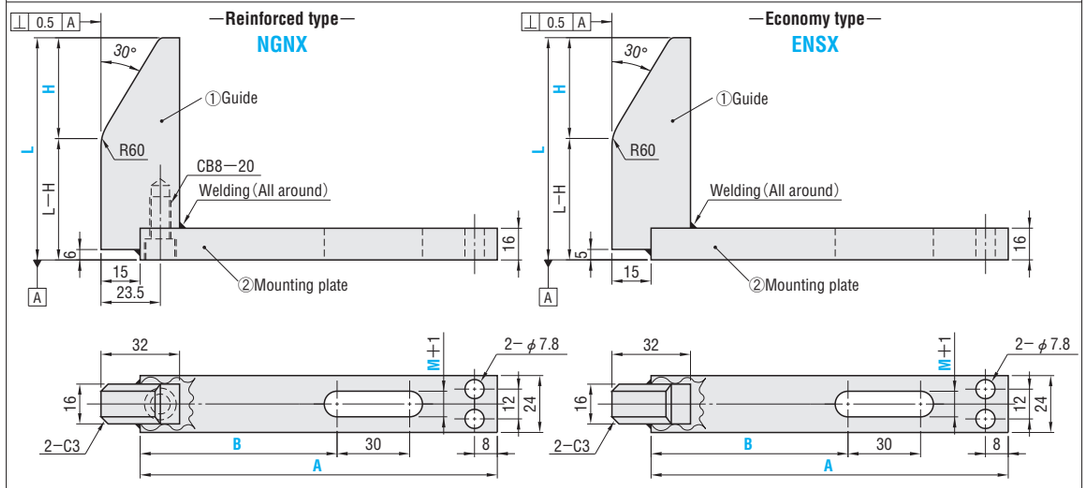

H is the dimension before R60 and GRC machining.

Type	Catalog No.	M
Reinforced type	NGNX	①1045 ②SS400
Economy type	ENSX	①SS400 ②SS400

■Mounting bolts and other accessories

M	A
M10	CB10—35 (2 pcs.) Spring washer for M10 (2 pcs.)
M12	CB12—35 (2 pcs.) Spring washer for M12 (2 pcs.)

Catalog No.		L 5mm increments	H 5mm increments	A 10mm increments	B 5mm increments	Mounting bolt hole M
Reinforced type	NGNX	65～100 105～150 155～200	20～40	100～200	35≦B≦A—50	M10 M12
Economy type	ENSX					

Reinforced type **NGNX**: The guide ① and the mounting plate ② are fastened by welding and bolting. As the guide ① is made of 1045, it can be hardened by flame hardening or alteration HTC.

Economy type **ENSX**: The guide ① and the mounting plate ② are fastened by welding only.

Order



Catalog No.	—	L	—	H	—	A	—	B	—	M
NGNX	—	150	—	40	—	A150	—	B80	—	M12

Days to Ship: Quotation

Price: Quotation

Alterations

Catalog No.	—	L	—	H	—	A	—	B	—	M	—	(HTC·GRC·WSS)
NGNX		—150		—40		—A150		—B80		—M12	—	HTC

Alteration	Code	Spec.	$/Code
	HTC	①The guide is hardened. ～ 45HRC Can be used for reinforced type only.	Quotation
	GRC	The corner R (R60) of the guide is reduced. R10 ～ 30 10mm increments	
	WSS	Provided spring washers are changed to washers for oblong holes WSS (2 pcs.).	

L \ A	Base unit price 1～9 pieces			
	NGNX		ENSX	
	A100～150	A160～200	A100～150	A160～200
65～100				
105～150			Quotation	
155～200				