Demountable Self-Lubricating Bushings

GS100-15G

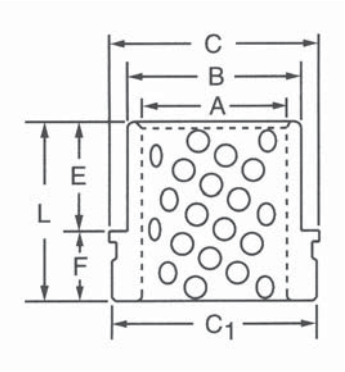

Product Features

These demountable self-lubricating bushings are available in standard and short profiles and are ideally suited for running with commercial and precision posts. They are manufactured from cast aluminum bronze material and are prefitted to the same diameter guide posts to ensure that the bushings and guide posts of the same diameter are interchangeable.

Self-lubricating bushings contain graphite plugs which are impregnated with oil. When the bushings reach 80-90°F as a result of friction between the bushing and guide post, oil is drawn from the plug thus lubricating the wear surface. A dark smear pattern is created on the wear surface as the oil and graphite are imbedded into the bronze or steel grain. This provides the lubrication necessary for continuous performance of the tool.

Demountable bushings are tap fit into location and seat flush with the ground face of the punch holder. The bushings are held in place with toe clamps and screws which provide perfect alignment of the bushing with the bore perpendicular to the ground surface of the punch holder. The clamp and screws provide four times the holding power compared to pressed-in bushings, yet they can be easily removed and assembled thus simplifying die building and maintenance.

	Post Diameter A (in)	Bushing Diameters			Press Fit Length E (in)	Shoulder Length F (in)	Overall Length L (in)	Self-Lubricating Part Number
		B (in)	C (in)	C1 (in)				
SHORT SHOULDER	1	1 1/2	1 3/4	1 9/16	1 3/8	1/2	1 7/8	GS100-15G
					2 3/8		2 7/8	GS100-23G
	1 1/4	1 3/4	2 1/8	1 15/16	1 7/8	1/2	2 3/8	GS125-19G
					2 7/8		3 3/8	GS125-27G
	1 1/2	2	2 3/8	2 3/16	1 7/8	1/2	2 3/8	GS150-19G
					2 7/8		3 3/8	GS150-27G
	1 3/4	2 1/4	2 5/8	2 7/16	2 3/8	1/2	2 7/8	GS175-23G
					3 3/8		3 7/8	GS175-31G
	2	2 1/2	2 15/16	2 3/4	2 3/8	1/2	2 7/8	GS200-23G
					3 3/8		3 7/8	GS200-31G
	2 1/2	3	3 3/8	1 3/16	2 5/8	3/8	3	GS250-24G
					3 5/8		4	GS250-32G
					4 5/8		5	GS250-40G
	3	3 1/2	3 7/8	3 11/16	2 5/8	3/8	3	GS300-24G
					3 5/8		4	GS300-32G
					4 5/8		5	GS300-40G
					5 5/8		6	GS300-48G
	3 3/4	4 1/2	4 11/16	4 7/8	6 5/8	3/8	7	GS375-56G
	4 1/2	5 1/2	5 7/8	5 11/16	4 5/8	3/8	8	GS450-40G
					7 5/8			GS450-64G