Bushings – Inch – Wring Fit Style

BRONZE with SELF-LUBRICATING GRAPHITE PLUGS

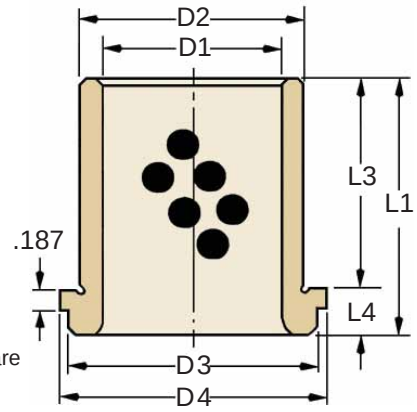

D-Clamps & Screws are included with wring fit style bushings.

*See page 3 for details.
See pages 16 & 17 for toe clamp placement instructions.

SHORT SHOULDER BUSHINGS – SELF-LUBRICATING									
PART NUMBER Class 3 only*		D1	D2		D3	D4	L1	L3	L4
		Nom Pin	Wring Fit Diameter		Head	Shoulder	Overall	Wring Fit	Head
GROUND	UNGROUND	Diam.	GROUND	UNGROUND	OD	OD	Length	Length	Length
GSCB-750-S	SCB-750-S	3/4	1.1250	1.1410	1.125	1.313	1.563	1.063	0.500
GSCB-750-L	SCB-750-L						2.313	1.813	
GSCB-875-S	SCB-875-S	7/8	1.3750	1.3910	1.375	1.563	1.563	1.063	0.500
GSCB-875-L	SCB-875-L						2.313	1.813	
GSCB-100-S	SCB-100-S	1	1.5000	1.5160	1.563	1.750	1.875	1.375	0.500
GSCB-100-L	SCB-100-L						2.875	2.375	
GSCB-125-S	SCB-125-S	1-1/4	1.7500	1.7600	1.938	2.125	2.375	1.875	0.500
GSCB-125-L	SCB-125-L						3.375	2.875	
GSCB-150-S	SCB-150-S	1-1/2	2.0000	2.0160	2.188	2.375	2.375	1.875	0.500
GSCB-150-L	SCB-150-L						3.375	2.875	
GSCB-175-S	SCB-175-S	1-3/4	2.2500	2.2660	2.438	2.625	2.875	2.375	0.500
GSCB-175-L	SCB-175-L						3.875	3.375	
GSCB-200-S	SCB-200-S	2	2.5000	2.5160	2.750	2.938	2.875	2.375	0.500
GSCB-200-L	SCB-200-L						3.875	3.375	
GSCB-250-S	SCB-250-S	2-1/2	3.0000	3.0160	3.188	3.375	3.000	2.625	0.375
GSCB-250-M	SCB-250-M						4.000	3.625	
GSCB-250-L	SCB-250-L						5.000	4.625	
GSCB-300-X	SCB-300-X	3	3.5000	3.5160	3.688	3.875	3.000	2.625	0.375
GSCB-300-S	SCB-300-S						4.000	3.625	
GSCB-300-M	SCB-300-M						5.000	4.625	
GSCB-300-L	SCB-300-L						6.000	5.625	
GSCB-375-S	SCB-375-S	3-3/4	4.5000	4.5160	4.688	4.875	7.000	6.625	0.375
GSCB-450-S	SCB-450-S	4-1/2	5.5000	5.5160	5.688	5.875	8.000	7.625	0.375

Self-lubricating bronze with graphite bushings require initial lubrication with light oil. Periodic lubrication will extend the life of self-lubricating bushings. **Do not use grease.**