Automotive Demountable Self-Lubricating Guide Post Bushings

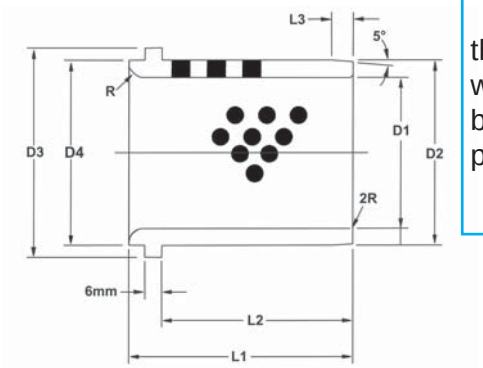

Product Features

Demountable NAAMS bushings are self-lubricating and are available in guide post and pad styles. These bushings fully conform to the NAAMS, GM, Chrysler and Ford standards.

Self-lubricating bushings contain graphite plugs which are impregnated with oil. When the bushings reach 80-90°F as a result of friction between the bushing and guide post, oil is drawn from the plug, thus lubricating the wear surface. A dark smear pattern is created on the wear surface as the oil and graphite are imbedded into the bronze or steel grain. This provides the lubrication necessary for continuous performance of the tool.

Demountable bushings are tap fit into location and seat flush with the ground face of the punch holder. The bushings are held in place with toe clamps and screws which provide perfect alignment of the bushing with the bore perpendicular to the ground surface of the punch holder. Multipe standard clamps are available.

D1 mm	D2 mm	D3 mm	D4 mm	L1 mm	L2 mm	L3 mm	R mm	Part Number	NAAMS Bushing Number	GM Part Number	Chrysler Part Number	Ford Part Number
25	32	40	32	40	30	4	3	NM25	G612540	90.20.55-25	19-029-1010	WDX13-60-08025
32	40	50	40	50	40	4	3	NM32	G613250	90.20.55-32	19-029-1011	WDX13-60-08032
40	50	63	50	63	50	4	3	NM40	G614063	90.20.55-40	19-029-1012	WDX13-60-08040
50	63	71	63	71	56	5	5	NM50	G615071	90.20.55-50	19-029-1013	WDX13-60-08050
63	80	90	80	80	63	6	6	NM63	G616380	90.20.55-63	19-029-1014	WDX13-60-08063
80	100	112	100	100	80	8	8	NM80	G618010	90.20.55-80	19-029-1015	WDX13-60-08080
100	125	140	125	125	106	10	10	NM100	G611012	90.20.55-100	19-029-1016	WDX13-60-08100
100	125	140	125	77	58	12	12	NM100S	—	90.20.55-100S	—	—
115	140	155	140	140	120	12	10	NM115	G611114	—	19-029-1017	—
125	160	180	160	160	132	12	12	NM125	G611216	90.20.55-125	19-029-1018	WDX13-60-08125

CLAMP NOTES:

- See pages 10–12 for clamp part numbers and dimensional information.
- **OUR** bushings will be supplied with (3) M8 toe clamps and screws (#6-99-1).
- **NAAMS** bushings will be supplied with (3) M8 toe clamps and screws (#6-99-1).
- **GM** bushings are supplied with NO clamps and screws. Order separately: for 25-50mm, order (1) 90.20.60A clamp per bushing; for 63-125mm, order (2) 90.20.60B clamps per bushing.
- **CHRYSLER** guide post bushings are supplied with NO clamps or screws. Order STOP/BUSHING CLAMP COMBINATION BLOCK separately. See Table 1 for sizes and part numbers.
- **Ford** bushings: 32-50mm are supplied with (1) toe clamp (#MMC0219); 63mm-100mm are supplied with (2) toe clamps (#MMC0219).

TABLE 1
STOP BLOCK/BUSHING CLAMPS

Chrysler Part Number	Bushing ID mm
19-010-1105	50mm
19-010-1106	63mm
19-010-1108	80mm
19-010-1110	100mm