

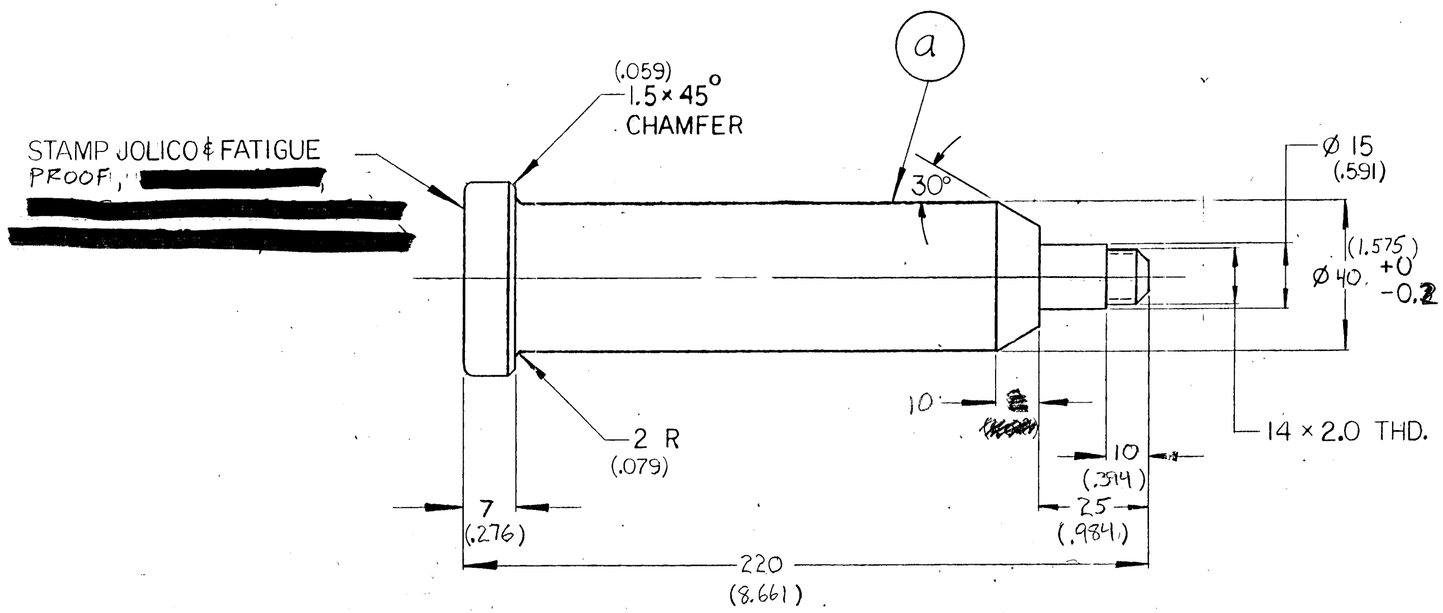


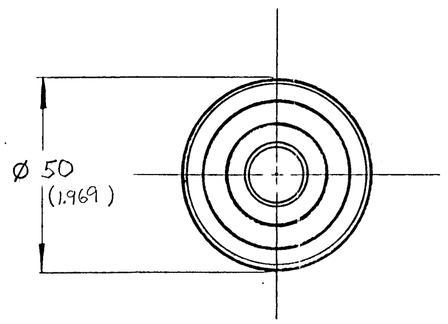


(A)

.015" BREAK MAX.

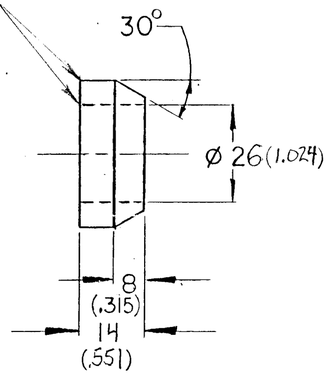


2 RETAINER RING
ONE REQ'D
MAT'L ~ FATIGUE PROOF
STK ~ DIA. X LNG.

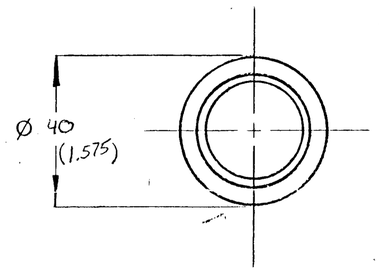



1 DIE LIFT PIN
ONE REQ'D
MAT'L ~ WELDMENT

a PIN BODY
ONE REQ'D
MAT'L ~ FATIGUE PROOF
STK ~ DIA X LNG.


b RING LOCK
ONE REQ'D
MAT'L ~ FATIGUE PROOF
STK ~ $\frac{1}{16}$ DIA. X LNG.

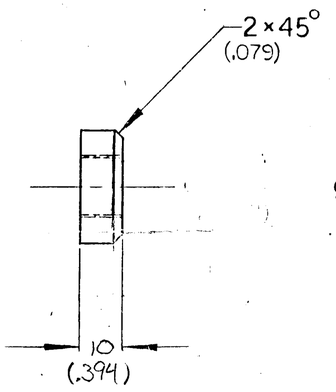



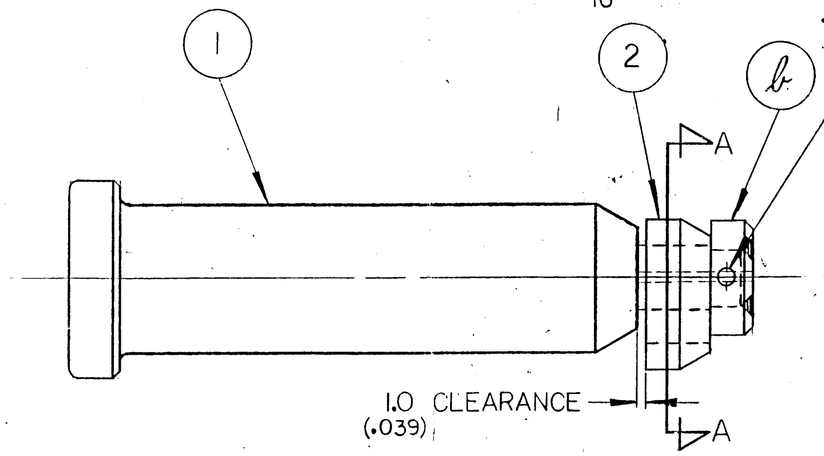

Ø 4mm SPRING PIN X 26
TO LOCATE AT ASSEMBLY

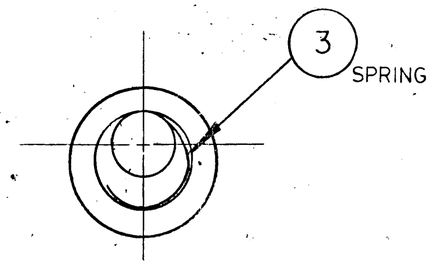

SECTION A-A

ASSEMBLY

NOTE: ALL DIMENSIONS TO BE ±0.2
UNLESS OTHERWISE SPECIFIED

NOTE: DO NOT SUBSTITUTE MATERIAL

TREAT WITH RUST INHIBITOR
OIL FOR SHIPMENT

REVISIONS				
REV.	DATE	DESCRIPTION	BY	CHD
A	3-14-06	ADDED [illegible]	[illegible]	[illegible]

JOLICO INDUSTRIES

PART NAME: TYPE "A" DIE LIFT PIN

DR. MES | CHK. Rel 1-26-89 | DATE 1-26-89

REF. NO. | 881.426 | DWG. NO. 90.15.00-40B