

REVISIONS				
REV	DATE	DESCRIPTION	BY	CHD
A	3-14-89	[redacted]	[redacted]	[redacted]

CHANGES


STAMP JOLICO & FATIGUE PROOF, [redacted]

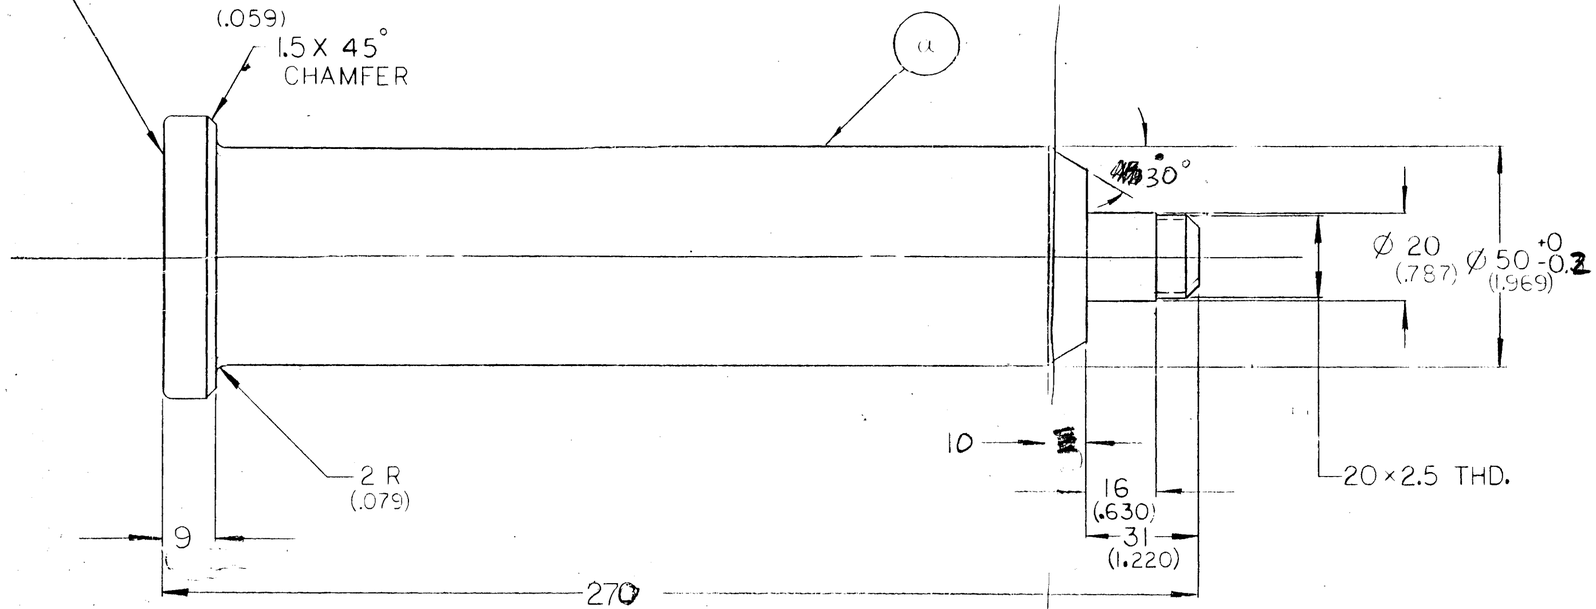


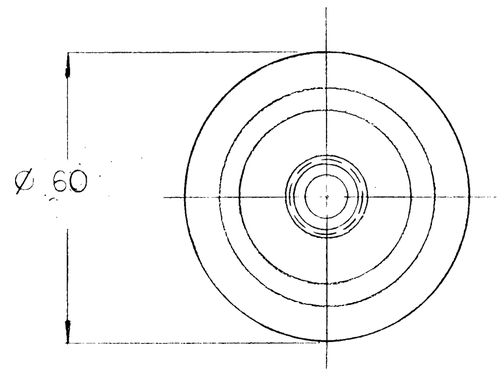

(A) .015" BREAK MAX.

(2) RETAINER RING
MAT'L-FATIGUE PROOF
STK 2. DIA. × 11/16

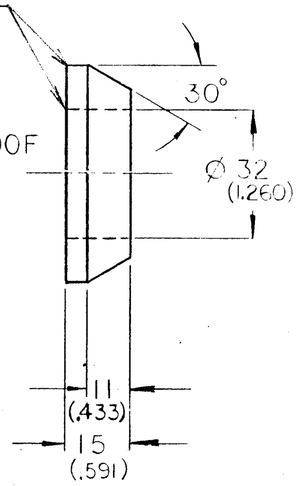


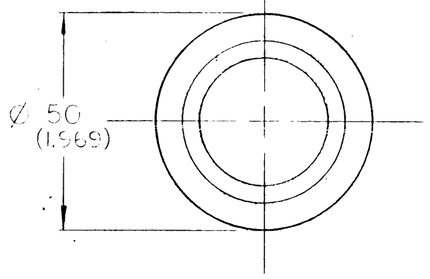



(1) DIE LIFT PIN
ONE REQ'D
MATL-WELDMNT

(a) ONE REQ'D-PIN BODY
MAT'L-FATIGUE PROOF
STK- 2 1/2 DIA. × 10 11/16


(b) ONE REQ'D-RING LOCK
MAT'L-FATIGUE PROOF
STK- 1 1/2 DIA. × 5/8 LNG.

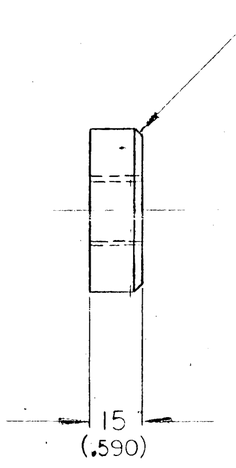

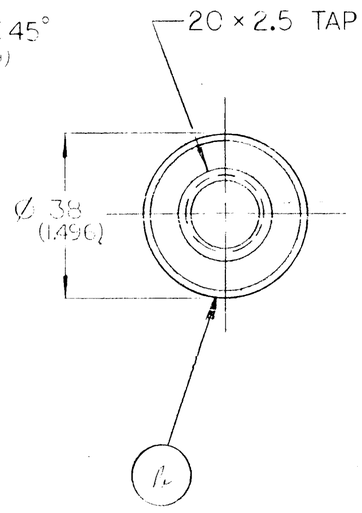

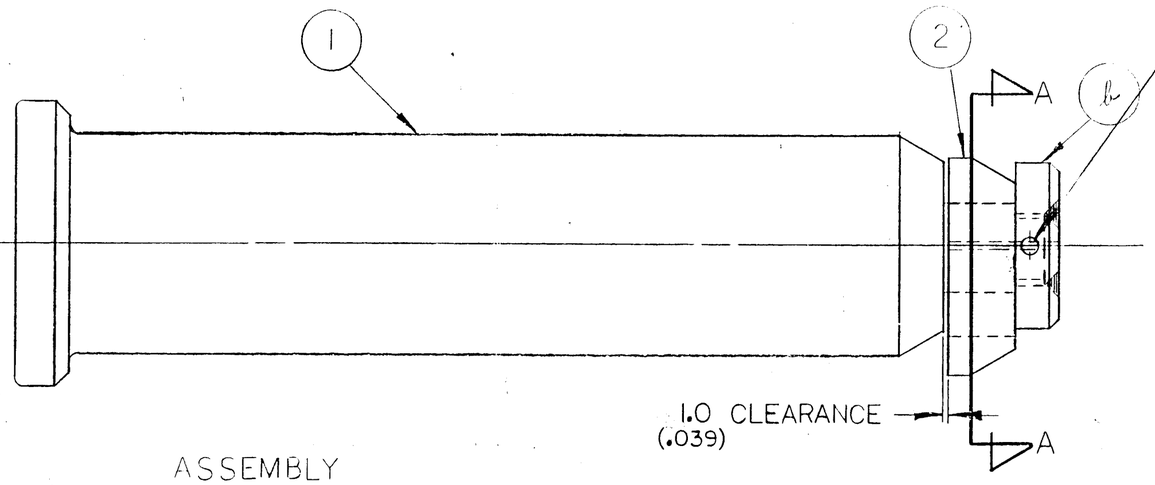

ASSEMBLY

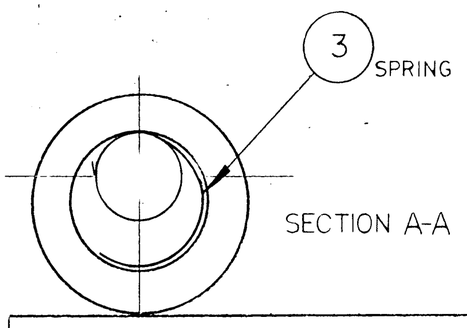

NOTE: ALL DIMENSIONS TO BE ± 0.2 UNLESS OTHERWISE SPECIFIED.

NOTE: DO NOT SUBSTITUTE MATERIAL.

TREAT WITH RUST INHIBITOR OIL FOR SHIPMENT

JOLICO INDUSTRIES

TYPE A DIE LIFT PIN

DR	CHK	DATE
MES	Rev 12-19-88	~~12-19-88~~

90.15.00-50

REV NO [redacted]

DWG 881427

SHT 1 OF 1 SCALE: