12,884

REV.	DATE	DESCRIPTION	BY	CHD
H	3-14-05	ADDED .015" BREAK MAX	JG	[illegible]

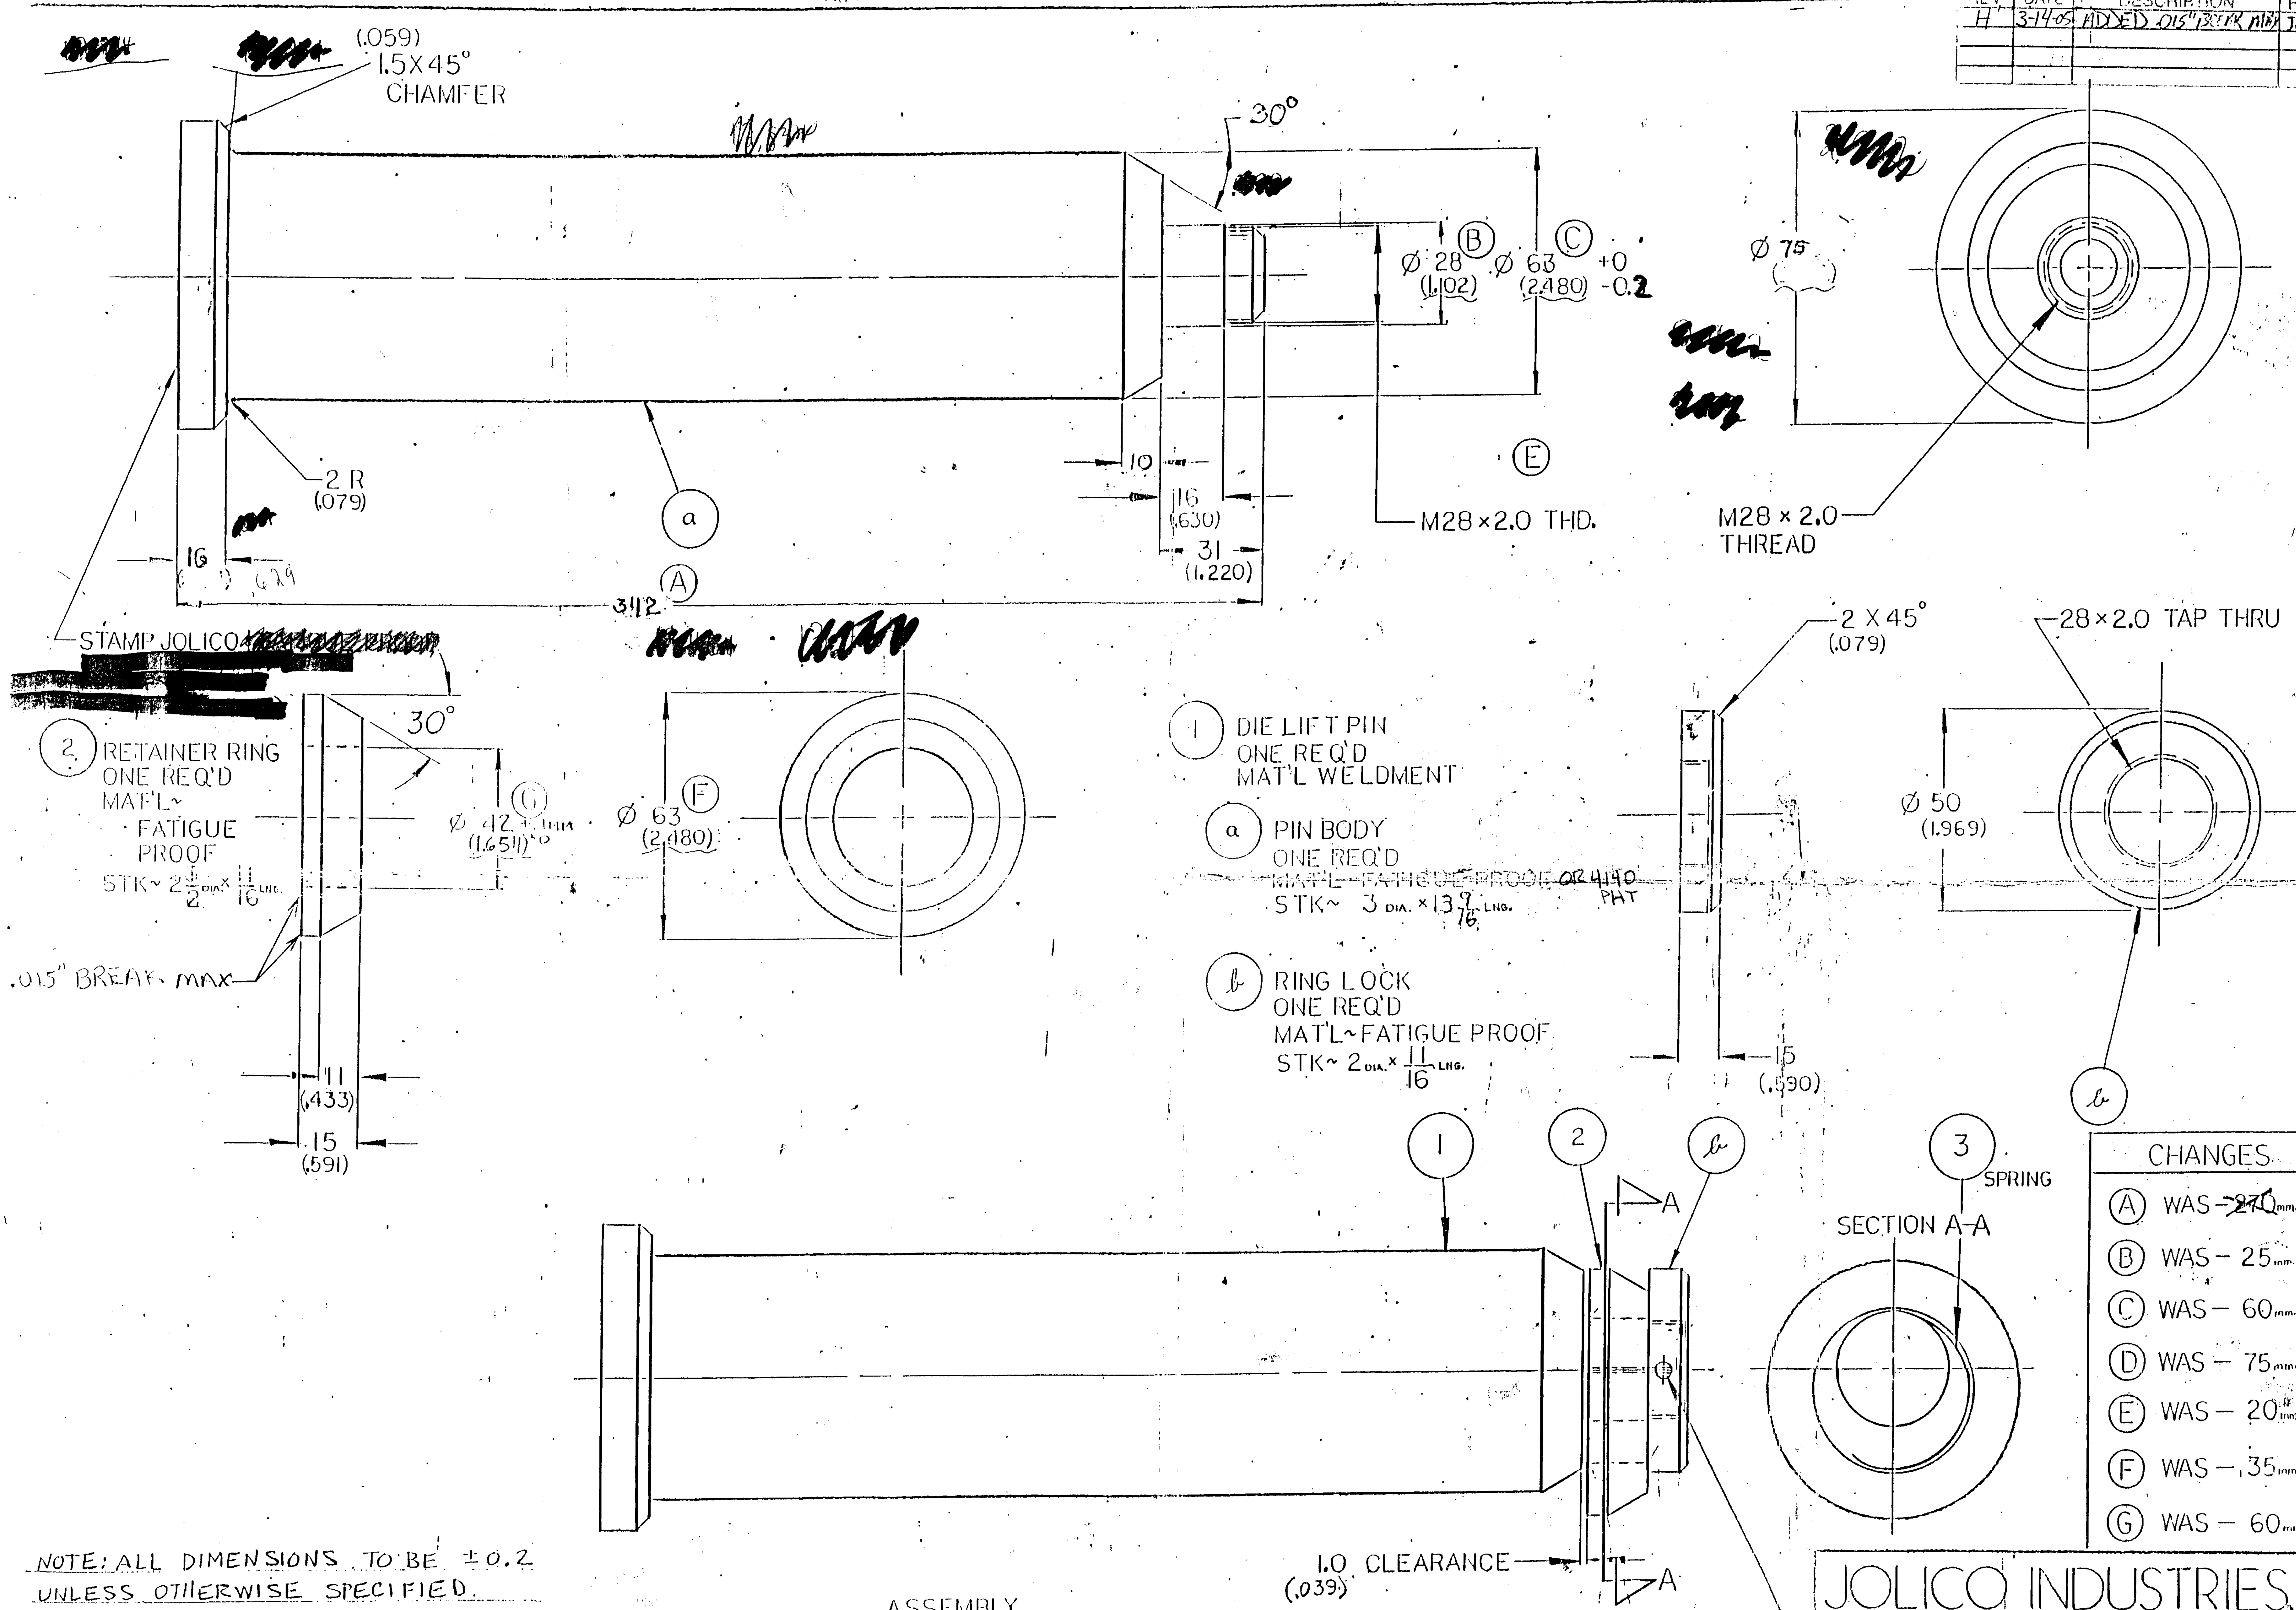

② RETAINER RING
ONE REQ'D
MAT'L~
FATIGUE
PROOF
STK~ $2\frac{1}{2}$ DIA. × $\frac{11}{16}$ LNG.

① DIE LIFT PIN
ONE REQ'D
MAT'L WELDMENT

ⓐ PIN BODY
ONE REQ'D
~~MAT'L~FATIGUE PROOF~~ OR 4140 PHT
STK~ 3 DIA. × $13\frac{9}{16}$ LNG.

ⓑ RING LOCK
ONE REQ'D
MAT'L~FATIGUE PROOF
STK~ 2 DIA. × $\frac{11}{16}$ LNG.

CHANGES

Ⓐ WAS – ~~270~~ mm.
Ⓑ WAS – 25 mm.
Ⓒ WAS – 60 mm.
Ⓓ WAS – 75 mm.
Ⓔ WAS – 20 mm.
Ⓕ WAS – 35 mm.
Ⓖ WAS – 60 mm.

NOTE: ALL DIMENSIONS TO BE ±0.2 UNLESS OTHERWISE SPECIFIED.

NOTE: DO NOT SUBSTITUTE MATERIAL.

TREAT WITH RUST INHIBITOR
OIL FOR SHIPMENT

④ 4mm X 45 SPRING PIN TO LOCATE AT ASSEMBLY

JOLICO INDUSTRIES

PART NAME
TYPE 'A' DIE LIFT PIN

DR MES
CHK PEL [illegible]
DATE 12-22-88
REF. NO. [illegible]
DWG NO J-881428