
AJACS

Urethane Nitrogen Lock

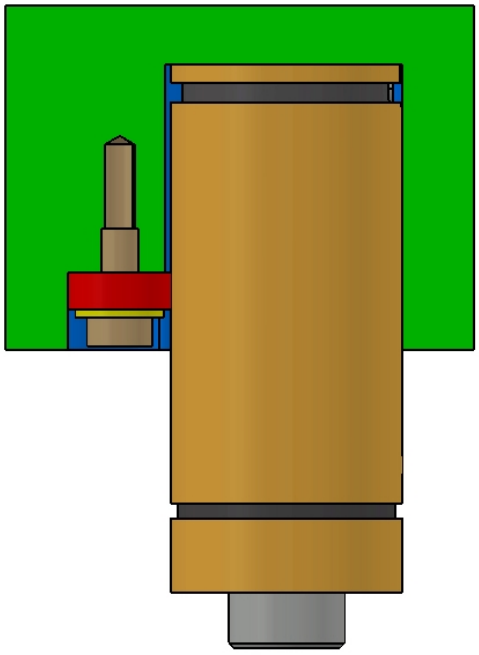

The Urethane Nitrogen Lock Advantage

- No Studs or Screws required to hold Gas Spring
- Eliminates need to counter bore punch holder
- Simple In-Press removal of Gas Springs
- Reduces machining time and cost
- Compatible with ALL Brands
- Reduced footprint provides numerous design advantages

Installation and Design Recommendations


Put quadrant of Nitro to the quadrant of clearance pocket opposite side put quadrant of 7/8 urethane to quadrant of nitro

Clearance dia. For urethane .880 +.005/.010 min. depth .375

Connecting radius .062

Tighten shoulder bolt till it bottoms out causing urethane to press against nitro gas spring

Designer responsible for choosing appropriate spring can length to accommodate failure of gas spring and nitrogen lock to prevent spring from falling out of pocket

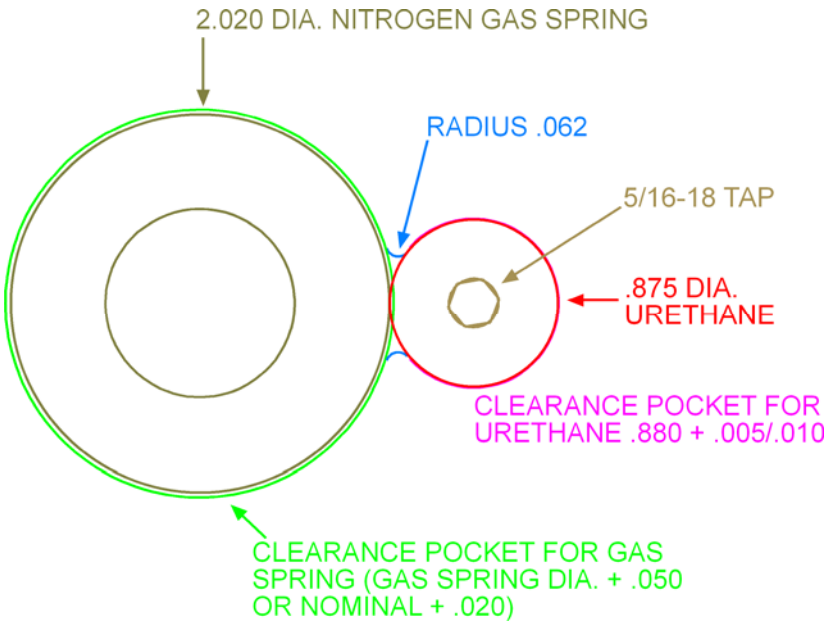

Part Number: UNL-87

Pricing Per Assembly: $5.25

Cad data available for download at:
http://www.ajacs.com/mediafile/unl87.zip
DWG file (dwg) STEP(stp) IGES (igs)

800.968.6868
616.452.1469
Fax 616.452.1386
sales@ajacs.com