Press Fit
Positive Pick-Up Pilots

Steel	HRC
M2	60-63

Heads Drawn to HRC 40-55 Through D25


Order any length from 65 through 142MM.

Type


APA Regular

SPA Center Dowel



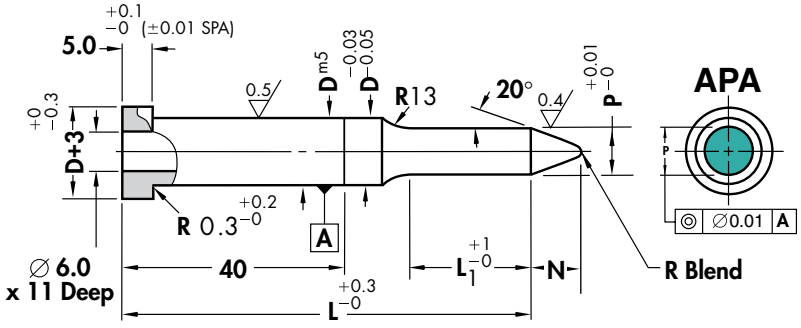

When P = D shank tolerance applies to full length.

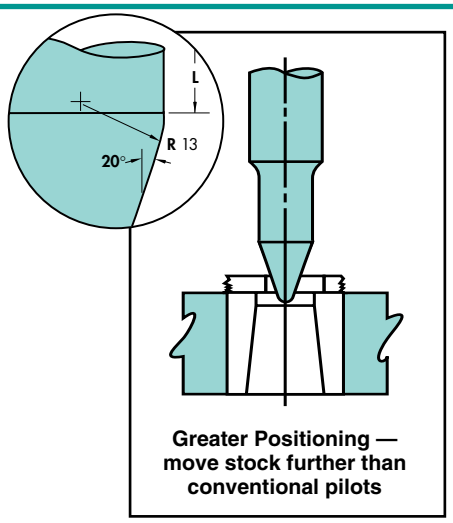

Greater Positioning — move stock further than conventional pilots


Shank D	Point Length L_1 Std.	Point Length L_1 Alt.	Type & D APA/SPA	Range P	Nose Lgth. N	L 65	72	73	82	92	102	112	127	142
10	21	27	APA/SPA 10	4.85–10.00	8	•	•	•	•	•	•	•		
13	21	27	APA/SPA 13	6.30–13.00	10	•	•	•	•	•	•	•	•	
16	21	27	APA/SPA 16	9.95–16.00	15		•	•	•	•	•	•	•	•
20	21	27	APA/SPA 20	13.60–20.00	20		•	•	•	•	•	•	•	•
25	21	27	APA/SPA 25	17.25–25.00	25		•	•	•	•	•	•	•	•
32	27	32	APA/SPA 32	20.85–32.00	30			•	•	•	•	•	•	•

Tapped Dowel ∅6 x 25 included for SPA

Standard Alterations for APA, SPA, APT Pilots

Standard alterations are the ranges beyond those sizes listed in the catalog which can be manufactured for a slight additional charge.

XBR Point Length Longer than Standard




XBB and X3B adds 3 days to delivery


L_1 Max / APA/SPA APT	XBR 15	21	27	32	37	XBB 42	X3B 50	60	70
D	Minimum P								
04	1.55	1.55	1.85	2.45	—	—	—	—	—
05	1.55	1.55	1.85	2.45	—	—	—	—	—
06	1.55	1.55	1.95	2.45	2.95	—	—	—	—
08	1.55	1.55	2.35	2.45	3.15	5.95	—	—	—
10	1.55	1.55	2.45	3.15	3.15	5.95	5.95	5.95	7.95
13	3.15	3.15	3.15	3.15	3.95	5.95	5.95	5.95	7.95
16	5.95	5.95	5.95	5.95	5.95	5.95	5.95	5.95	7.95
20	5.95	5.95	5.95	7.55	7.55	7.55	7.55	7.55	7.95
25	7.95	7.95	7.95	9.95	9.95	9.95	9.95	9.95	9.95
32	9.95	9.95	9.95	9.95	9.95	9.95	9.95	9.95	9.95

Shaded Area for APA/SPA-Only

XP P Smaller than Standard



XD m5



Reduced Shank Diameter
Head Diameter does not change with body diameter.

Shank Dia.	5	6	8	10	13	16	20	25	32
Min. XD	3.5	4.5	6.5	8.5*	11.5	14.5	18.5	23.5	30.5

*Not available on SPA