
Steel:	HRC
M2, PS4	60-63

Heavy Duty
Positive Pick-up Pilots

Order any length from 80 through 150mm


Type
BPA




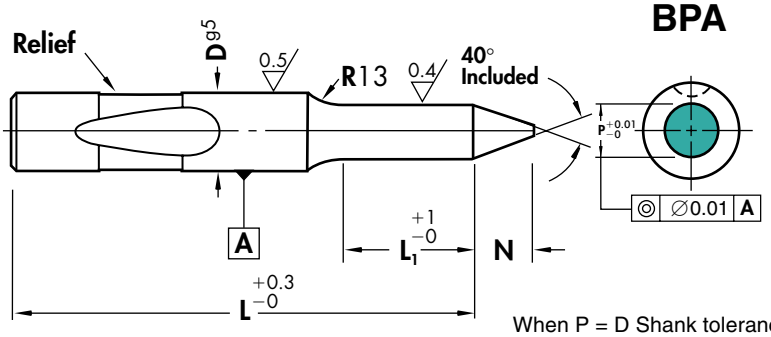

When P = D Shank tolerance applies to full length

Geometry provides smoother pick-up without the risk of distorting the hole.



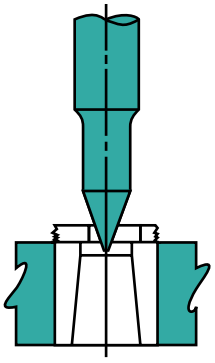


Greater Positioning moves the stock further than conventional pilots.

D	Point Length L_1 Std.	Alt.	Alt.	Type & D	Round Range P	N	L 80	90	100	110	125	140	150
10	19	32		**BPA10**	5.00-10.00	8	•	•	•	•			
13	19	32		**BPA13**	9.00-13.00	10	•	•	•	•	•	•	
16	25	38	**L**	**BPA16**	12.00-16.00	15	•	•	•	•	•	•	•
20	25	38	Minus	**BPA20**	15.00-20.00	20	•	•	•	•	•	•	•
25	25	38	48	**BPA25**	19.00-25.00	25	•	•	•	•	•	•	•
32	25	38		**BPA32**	24.00-32.00	30	•	•	•	•	•	•	•
40	30	45		**BPA40**	30.00-40.00	40	•	•	•	•	•	•	•

Max L_1 32 — Max L_1 42

BPA Pilots conform to *NAAMS*™ standard for Ball Lock Pilot Punches

XL **Overall Length Shortened**
Stock removal from point end. Standard or Alternate L_1 length is maintained on BPA only.

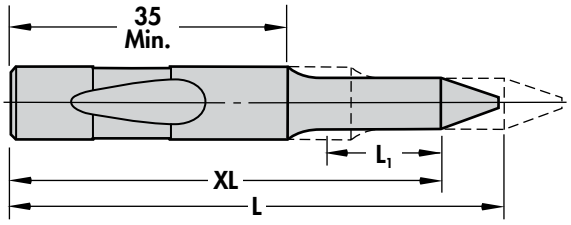

XLB **Overall Length Shortened**
L_1 length maintained.
(BPT only)
(Min. shank length 35)

See page 33 for coatings/treatments.

How to Order:

Specify: Quantity
Type
Shank & Length Codes
P Dimensions
Standard Alterations

