STANDARD LIFTERS, LLC


SL18 SPECIFICATIONS

For internal lifter bar applications

3 base sizes are available (7.0”, 12.0”, 18.0”)
Standard or self-lube bushings are available
Top Plates can be ordered in three styles (A, B, or C)
Top Plate material is machinable 4140
Lifters come standard with Standfast cylinders (Ch125, red)
Lifter heights are available from 2.375” to 7.125”
Lifter heights are ordered in .125” increments
Maximum travel = lifter height less 2.25”


***All Top Plate styles (A, B & C) are 1.5” wide**


FOOTPRINT OF BASE

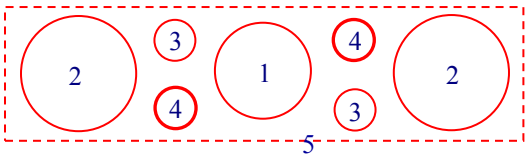


1. Drill 1.625” diameter to clear for cylinder cage
2. Drill 1.875” diameter to clear for guide pins
3. Ream 1” deep for ½” dowel pins
4. Tap 1” deep for ½” – 13 cap screw
5. Leave .05” between lifter and adjacent blocks


3 BASE SIZES

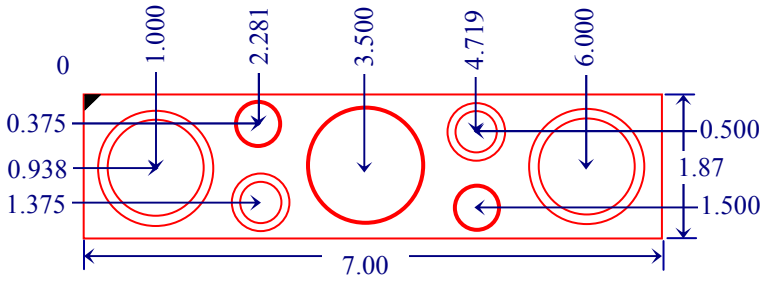

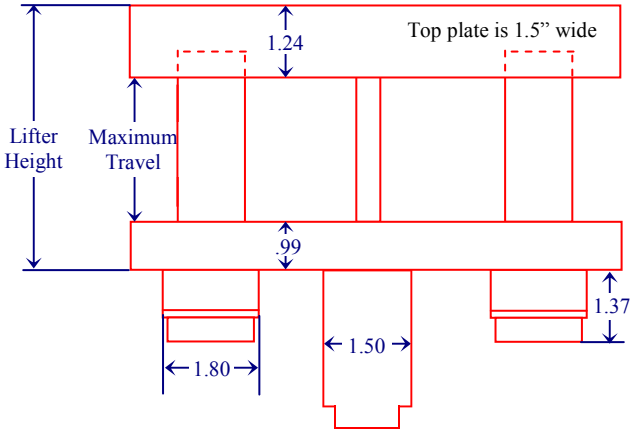

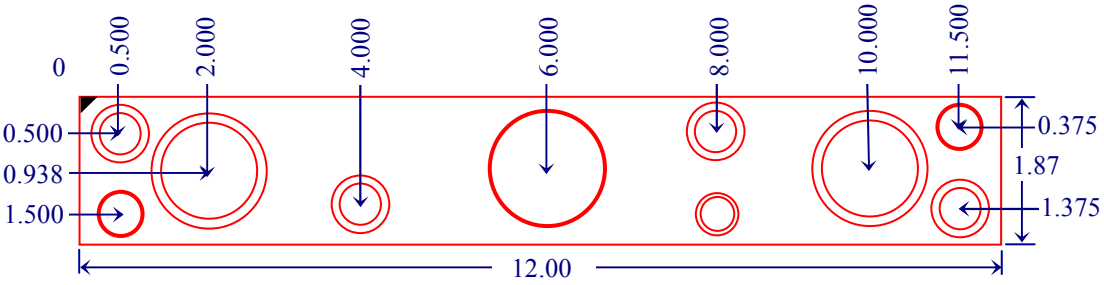

U.S. and Foreign Patents Pending

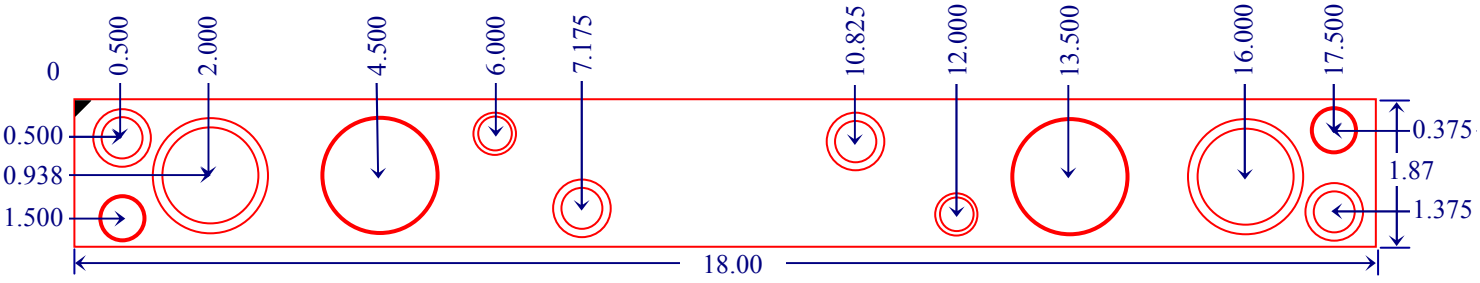

Specifications are the property of Standard Lifters, LLC. Unauthorized use is prohibited.