# OIL-FREE SLIDE PLATES
## —COPPER ALLOY 10mm TYPE·2 BOLT HOLES / 4 BOLT HOLES—

—2 bolt holes— RoHS


**STW** W= 28～ 75
**STWT** W=100～150



—4 bolt holes— RoHS


**STW** W=100～150



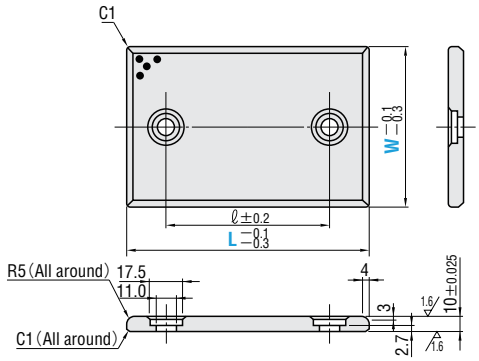



※For W=28 or 38, the R in the longer direction is R2.

- Slide direction
  For W=28 or 38, slide direction is the longer direction (L) only.
- The use of initial break-in greasing will make the product more effective.

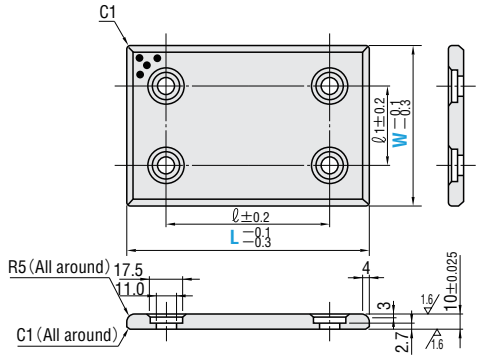


- **Provided mounting bolts**




M Copper alloy
Special solid lubricant (embedded)
A Special low head bolts

| ℓ | Catalog No. | W | L |
|---|---|---|---|
| 45 | — 2 bolt holes — STW | 28 | 75 |
| 50 | | | 100 |
| 75 | | | 125 |
| 100 | | | 150 |
| 45 | | 38 | 75 |
| 50 | | | 100 |
| 75 | | | 125 |
| 100 | | | 150 |
| 45 | | 48 | 75 |
| 50 | | | 100 |
| 75 | | | 125 |
| 100 | | | 150 |
| 150 | | | 200 |
| 45 | | 58 | 75 |
| 50 | | | 100 |
| 100 | | | 150 |
| 25 | | 75 | 75 |
| 50 | | | 100 |
| 75 | | | 125 |
| 100 | | | 150 |
| 150 | | | 200 |
| 50 | — 2 bolt holes — STWT | 100 | 100 |
| 75 | | | 125 |
| 100 | | | 150 |
| 150 | | | 200 |
| 200 | | | 250 |
| 100 | | 125 | 150 |
| 150 | | | 200 |
| 200 | | | 250 |
| 100 | | 150 | 150 |
| 150 | | | 200 |

| ℓ | ℓ1 | Catalog No. | W | L |
|---|---|---|---|---|
| 50 | 50 | — 4 bolt holes — STW | 100 | 100 |
| 75 | | | | 125 |
| 100 | | | | 150 |
| 150 | | | | 200 |
| 200 | | | | 250 |
| 100 | 50 | | 125 | 150 |
| 150 | | | | 200 |
| 200 | | | | 250 |
| 100 | 100 | | 150 | 150 |
| 150 | | | | 200 |

Order

| Catalog No. | W | — | L |
|---|---|---|---|
| STW | 75 | — | 100 |
| STWT | 100 | — | 200 |

Days to Ship **Quotation**

Price **Quotation**

■Shims for oil-free slide plates P.1142