
40" Wearstrips

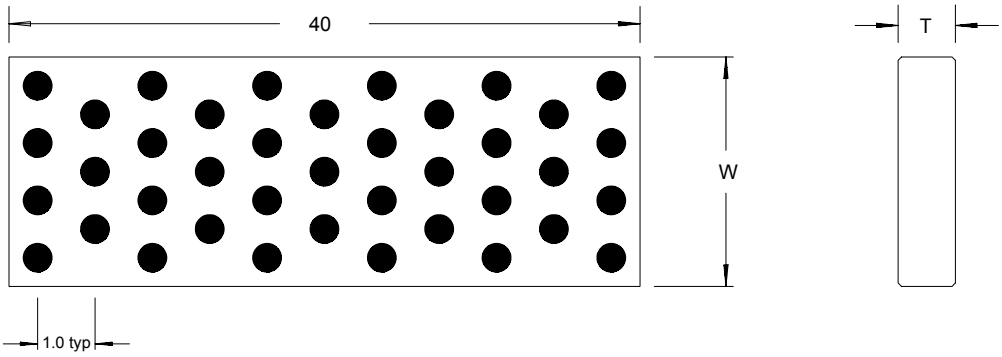

Material: Aluminum Bronze **Tolerances:** T +/- .001; W: +/- .010

With Self-Lubricating Graphite Plugs

	Width (W)								Mounting Screw
T	1.5	2	2.5	3	4	5	6	8	
1/4	212-320NG*	216-320NG	220-320NG*	224-320NG*	232-320NG				
3/8	312-320NG	316-320NG	320-320NG	324-320NG	332-320NG	340-320NG*	348-320NG*		1/4 SHCS
1/2	412-320NG	416-320NG	420-320NG	424-320NG	432-320NG	440-320NG	448-320NG*	464-320NG*	3/8 SHCS
5/8	512-320NG*	516-320NG	520-320NG*	524-320NG	532-320NG	540-320NG*	548-320NG*	564-320NG*	3/8 SHCS
3/4	612-320NG*	616-320NG	620-320NG*	624-320NG*	632-320NG	640-320NG	648-320NG*	664-320NG*	1/2 SHCS

Application Note: For standard sizes, graphite plugs are on one inch centers to facilitate cutting. Drill mounting holes either between or through graphite plugs. When going through a plug, first break out the graphite with a center punch and you'll have a pre-spotted hole.

Without Graphite Plugs (solid bronze)

T	Width (W)								
	1	1.5	2	2.5	3	4	5	6	8
1/4	28-320N	212-320N	216-320N	220-320N	224-320N	232-320N	240-320N	248-320N	
3/8	38-320N	312-320N	316-320N	320-320N	324-320N	332-320N	340-320N	348-320N	364-320N
1/2	48-320N	412-320N	416-320N	420-320N	424-320N	432-320N	440-320N		
5/8		512-320N*	516-320N*	520-320N*	524-320N*	532-320N*	540-320N*	548-320N*	564-320N*
3/4	68-320N*	612-320N*	616-320N						

* Special order only


Custom Sizes

If you need something special, we can make pretty much any size subject to certain size limitations. See pages 2.3.


© SelfLube, Inc. Coopersville, MI (USA) ISO 9002 registered *voice*: 616.837.9721 *fax*: 616.837.6573 *email*: info@selflube.com


SELFLUBE™
Die & Mold Components with or without Self-Lubricating Graphite
www.selflube.com

Inch Wearstrips

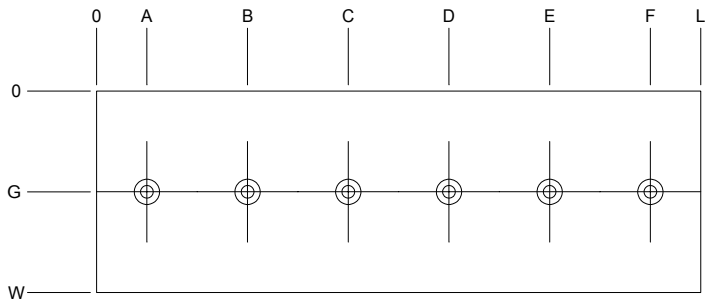


"A" PATTERN



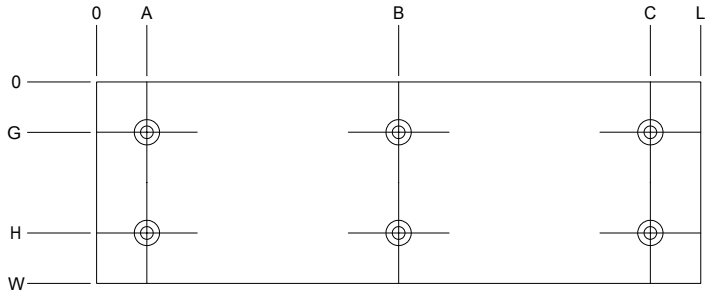

"B" PATTERN

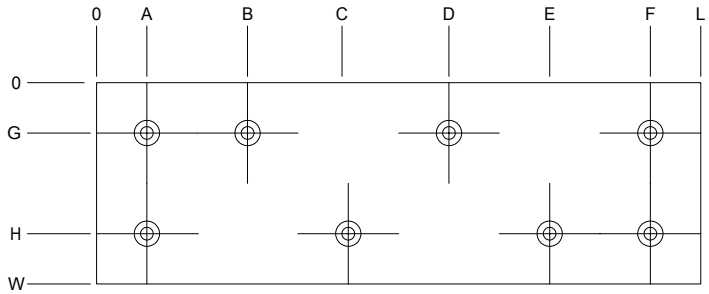

"C" PATTERN

Made of solid Aluminum Bronze with or without mounting holes and with or without self-lubricating graphite plugs in a variety of standard thickness, widths and lengths. **Custom sizes** are also available.

Material: Aluminum Bronze with and without Graphite plugs

Tolerances: Thickness: +/- .001; Hole Locations: +/-.005;
All Other: +/-.010

Thickness	Mounting Screw
1/4	1/4 FHS
3/8	1/4 SHCS
1/2	5/16 SHCS
5/8	5/16 SHCS

© SelfLube, Inc. Coopersville, MI (USA) ISO 9002 registered *voice*: 616.837.9721 *fax*: 616.837.6573 *email*: info@selflube.com

Inch Wearstrips - standard and custom

Ordering Note: Order by Catalog Number structured this way. See note for custom sizes.

Minimum **T** = 1/4; Maximum **W** = 8; Maximum **L** = 40

5 16 - 48 N G

- 5 — Thickness in 8ths
- 16 — Width in 8ths
- 48 — Length in 8ths
- N — N = No Holes; Blank = with Holes
- G — G = Graphited; Blank = No Graphite


Custom Sizes: Custom sizes are pretty routine for us. Order by catalog number if part T, W and L are in even multiples of 1/8 inch. Otherwise order by exact dimensions. A print is required for special hole patterns, special hole sizes or special graphite coverage (i.e., graphite needs to avoid a certain area).

Thk T	Width W	Length L	Screw Holes		Hole Location							
			Amt	Pattern	A	B	C	D	E	F	G	H
	1.00	4.00	2	A	1.00	3.00	-	-	-	-	.50	-
	1.00	5.00	3	A	.50	2.50	4.50	-	-	-	.50	-
1/4"	1.00	6.00	3	A	1.00	3.00	5.00	-	-	-	.50	-
	1.00	8.00	4	A	1.00	3.00	5.00	7.00	-	-	.50	-
3/8"	1.00	10.00	5	A	1.00	3.00	5.00	7.00	9.00	-	.50	-
	1.00	12.00	6	A	1.00	3.00	5.00	7.00	9.00	11.00	.50	-
	1.50	4.00	2	A	1.00	3.00	-	-	-	-	.75	-
	1.50	5.00	3	A	.50	2.50	4.50	-	-	-	.75	-
	1.50	6.00	3	A	1.00	3.00	5.00	-	-	-	.75	-
	1.50	8.00	4	A	1.00	3.00	5.00	7.00	-	-	.75	-
	1.50	10.00	5	A	1.00	3.00	5.00	7.00	9.00	-	.75	-
	1.50	12.00	6	A	1.00	3.00	5.00	7.00	9.00	11.00	.75	-
	2.00	4.00	2	A	1.00	3.00	-	-	-	-	1.00	-
	2.00	5.00	3	A	.50	2.50	4.50	-	-	-	1.00	-
	2.00	6.00	3	A	1.00	3.00	5.00	-	-	-	1.00	-
	2.00	8.00	4	A	1.00	3.00	5.00	7.00	-	-	1.00	-
	2.00	10.00	5	A	1.00	3.00	5.00	7.00	9.00	-	1.00	-
	2.00	12.00	6	A	1.00	3.00	5.00	7.00	9.00	11.00	1.00	-
1/4"	2.50	4.00	2	A	1.00	3.00	-	-	-	-	1.25	-
	2.50	5.00	3	A	.50	2.50	4.50	-	-	-	1.25	-
3/8"	2.50	6.00	3	A	1.00	3.00	5.00	-	-	-	1.25	-
	2.50	8.00	4	A	1.00	3.00	5.00	7.00	-	-	1.25	-
1/2"	2.50	10.00	5	A	1.00	3.00	5.00	7.00	9.00	-	1.25	-
5/8"	2.50	12.00	6	A	1.00	3.00	5.00	7.00	9.00	11.00	1.25	-
	3.00	4.00	4	B	1.00	3.00	-	-	-	-	.50	2.50
	3.00	5.00	4	B	.50	4.50	-	-	-	-	.50	2.50
	3.00	6.00	4	B	1.00	5.00	-	-	-	-	.50	2.50
	3.00	8.00	6	C	1.00	3.00	5.00	-	-	7.00	.50	2.50
	3.00	10.00	6	B	1.00	5.00	9.00	-	-	-	.50	2.50
	3.00	12.00	8	C	1.00	3.00	5.00	7.00	9.00	11.00	.50	2.50
	4.00	4.00	4	B	1.00	3.00	-	-	-	-	1.00	3.00
	4.00	5.00	4	B	.50	4.50	-	-	-	-	1.00	3.00
	4.00	6.00	4	B	1.00	5.00	-	-	-	-	1.00	3.00
	4.00	8.00	6	C	1.00	3.00	5.00	-	-	7.00	1.00	3.00
	4.00	10.00	6	B	1.00	5.00	9.00	-	-	-	1.00	3.00
	4.00	12.00	8	C	1.00	3.00	5.00	7.00	9.00	11.00	1.00	3.00

© SelfLube, Inc. Coopersville, MI (USA) ISO 9002 registered *voice*: 616.837.9721 *fax*: 616.837.6573 *email*: info@selflube.com

SELFLUBE™
Die & Mold Components with or without Self-Lubricating Graphite
www.selflube.com

NAAMS Wearstrips

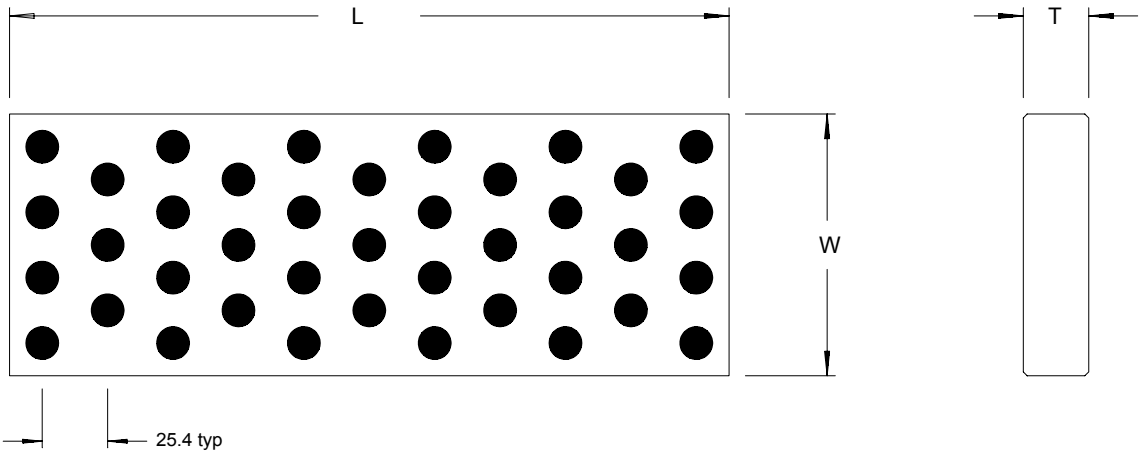

NAAMS Suffix	W	T	Screw Size
1025	25	10	M6
1040	40		
1050	50		
1063	63		
1075	75		
1010	100		
1012	125		
1015	150		
1225	25	12	M10
1240	40		
1250	50		
1263	63		
1275	75		
1210	100		
1212	125		
1215	150		
1525	25	15	M10
1540	40		
1550	50		
1563	63		
1575	75		
1510	100		
1512	125		
1515	150		
2025	25	20	M10
2040	40		
2050	50		
2063	63		
2075	75		
2010	100		
2012	125		
2015	150		

Material: Aluminum Bronze

Tolerances: T: +/-.025; W: +/-.25


Order by NAAMS Code structured as follows:


W5 3 1210

- 1210 — NAAMS Suffix
- 3 — Length (in mm)
  - 1 - 150
  - 3 - 300
  - 5 - 600
  - 7 - 1000


© SelfLube, Inc. Coopersville, MI (USA) ISO 9002 registered *voice*: 616.837.9721 *fax*: 616.837.6573 *email*: info@selflube.com

Metric Self Lubricating Wearstrips

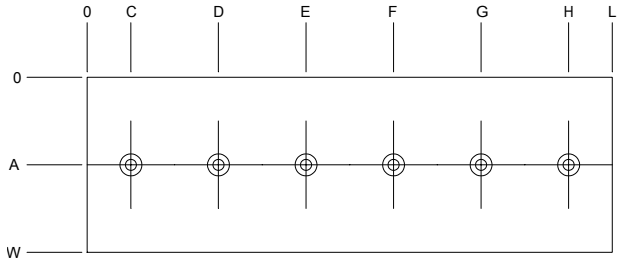




"A" PATTERN

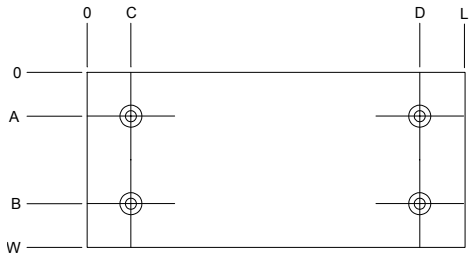

"B" PATTERN

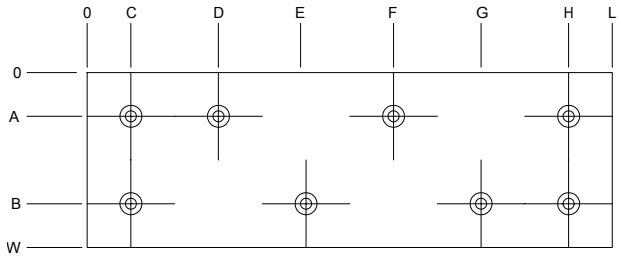

"C" PATTERN

TOLERANCES

Thickness: +/-.025
Hole Loc: +/-.13
All Other: +/-.25

Material: Aluminum Bronze
Graphite plugs cover 20-30% of self-lubricated surface

Catalog No.	Chrysler Code	Pat	M	T	W	A	B	C	D	E	F	G	H	L
NW10-50-150G	19-296-1203	A	M6	10	50	25			75	125				
NW10-75-150G	19-296-1205	B	M6	10	75	15	60		125					
NW12-50-150G	19-296-1223	A	M8	12	50	25			75	125				150
NW12-75-150G	19-296-1225	B	M8	12	75	15	60		125					
NW15-50-150G	19-296-1253	A	M10	15	50	25			75	125				
NW15-75-150G	19-296-1255	B	M10	15	75	15	60	25	125					
NW10-50-300G	19-296-1403	A	M6	10	50	25								
NW10-75-300G	19-296-1405	C	M6	10	75	15	60							
NW12-50-300G	19-296-1423	A	M8	12	50	25								
NW12-75-300G	19-296-1425	C	M8	12	75	15	60		75	125	175	225	275	300
NW15-50-300G	19-296-1453	A	M10	15	50	25								
NW15-75-300G	19-296-1455	C	M10	15	75	15	60							

© SelfLube, Inc. Coopersville, MI (USA) ISO 9002 registered *voice*: 616.837.9721 *fax*: 616.837.6573 *email*: info@selflube.com