

Drive for better vision




WiseEye2 I3C Slave Reg. Access

June, 2024


Himax Technologies, Inc.
奇景光電股份有限公司

MIPI I3C Basic Specification (ver 1.1.1, released on June 9, 2021)

- Annex A I3C Communication Format Details
 - ❖ A.2 I3C private write transfers (p.414)

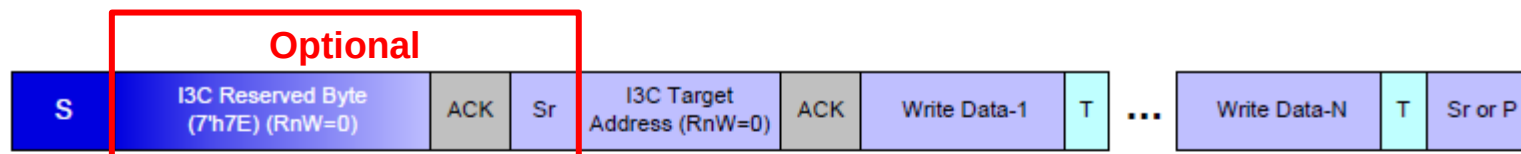

I3C Private Write Transfer Initiated with START Condition




I3C Private Write Transfer Initiated with Repeated START Condition


ACK = Acknowledge (SDA Low)
NACK = Not Acknowledge (NACK)
S = START Condition
Sr = Repeated START Condition
P = STOP Condition
T = Transition Bit alternative to ACK/NACK

I3C Private Write Transfers – Himax WE2 I3C Slave

- WE2 I3C register write in application

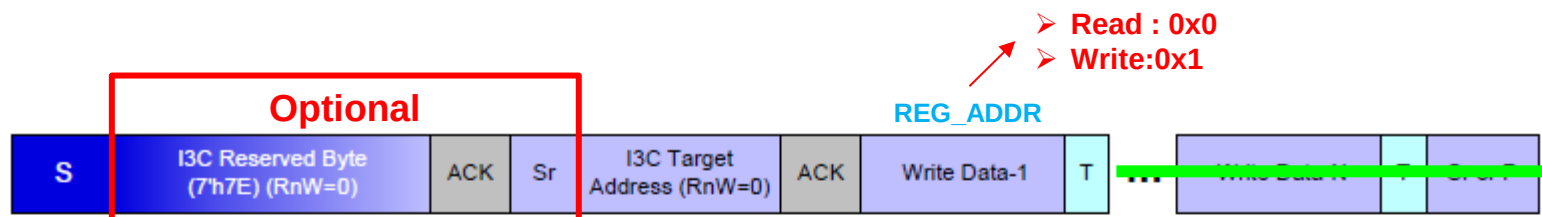

I3C Private Write Transfer Initiated with START Condition

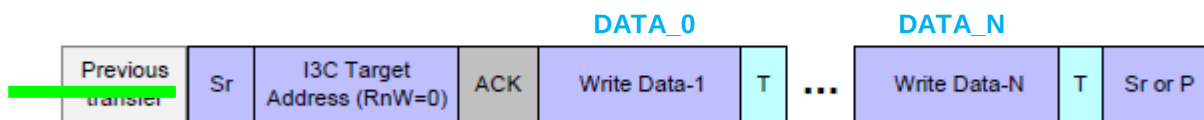


I3C Private Write Transfer Initiated with Repeated START Condition

ACK = Acknowledge (SDA Low)
NACK = Not Acknowledge (NACK)
S = START Condition
Sr = Repeated START Condition
P = STOP Condition
T = Transition Bit alternative to ACK/NACK

Example

- Write command to WE2
- slave addr = 0x08, Data is 0xA1,0xB2,0xC3,0xC4

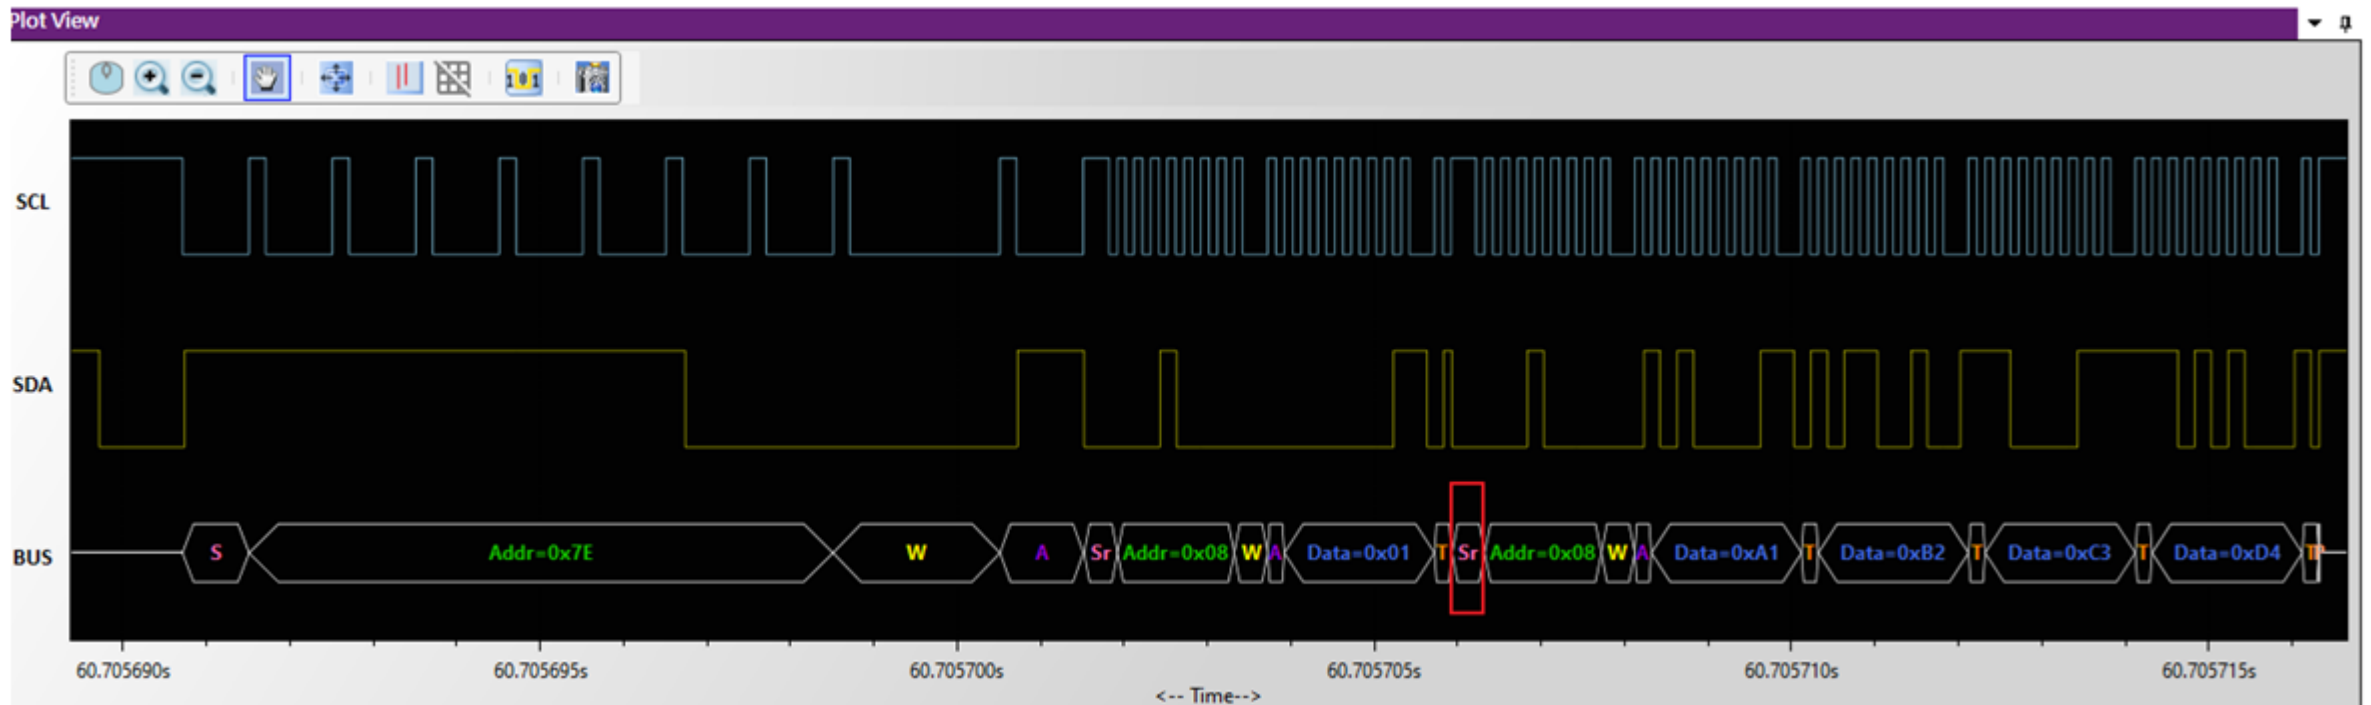



Drive for better vision