



(11) **EP 1 597 794 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**20.08.2008 Bulletin 2008/34**

(21) Application number: **03815944.8**

(22) Date of filing: **19.02.2003**

(51) Int Cl.:  
**H01Q 1/36 (2006.01)**

(86) International application number:  
**PCT/EP2003/001695**

(87) International publication number:  
**WO 2004/075342 (02.09.2004 Gazette 2004/36)**

(54) **MINIATURE ANTENNA HAVING A VOLUMETRIC STRUCTURE**

MINIATURANTENNE MIT VOLUMETRISCHER STRUKTUR

ANTENNE MINIATURE A STRUCTURE VOLUMETRIQUE

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
HU IE IT LI LU MC NL PT SE SI SK TR**

(43) Date of publication of application:  
**23.11.2005 Bulletin 2005/47**

(60) Divisional application:  
**08000506.9 / 1 912 280**

(73) Proprietor: **Fractus S.A.**  
**08190 Barcelona (ES)**

(72) Inventors:  
• **PUENTE-BALIARDA, Carles**  
**E-08172 Sant Cugat del Valles (ES)**  
• **SOLER-CASTANY, Jordi**  
**E-08302 Barcelona (ES)**  
• **ORTIGOSA-VALLEJO, Juan Ignacio**  
**E-08024 Barcelona (ES)**

• **ANGUERA-PROS, Jaume**  
**E-12500 Castellon (ES)**

(74) Representative: **Grünecker, Kinkeldey,  
Stockmair & Schwanhäusser**  
**Anwaltssozietät**  
**Leopoldstrasse 4**  
**80802 München (DE)**

(56) References cited:  
**WO-A-01/54225 WO-A-02/063714**  
**WO-A1-01/39321 WO-A1-20/04025778**  
**US-A1- 2003 001 794 US-B1- 6 211 889**  
**US-B1- 6 445 352 US-B1- 6 452 553**

• **PATENT ABSTRACTS OF JAPAN vol. 2003, no.**  
**05, 12 May 2003 (2003-05-12) & JP 2003 032022 A**  
**(NISSHIN DENKI KK), 31 January 2003**  
**(2003-01-31)**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 1 597 794 B1**

## Description

### FIELD

**[0001]** The technology described in this patent application relates generally to the field of antennas. More particularly, the application describes a miniature antenna having a volumetric structure. The technology described in this patent is especially well suited for long wavelength applications, such as high power radio broadcast antennas, long distance high-frequency (HF) communication antennas, medium frequency (MF) communication antennas, low-frequency (LF) communication antennas, very low-frequency (VLF) communication antennas, VHF antennas, and UHF antennas, but may also have utility in other antenna applications.

### BACKGROUND

**[0002]** Miniature antenna structures are known in this field. For example, a miniature antenna structure utilizing a geometry referred to as a space-filling curve is described in the co-owned International PCT Application WO 01/54225, entitled "Space-Filling Miniature Antennas." Fig. 1 shows one example of a space-filling curve 10. A space-filling curve 10 is formed from a line that includes at least ten segments, with each segment forming an angle with an adjacent segment. In addition, when used in an antenna, each segment in the space-filling curve 10 should be shorter than one-tenth of the free-space operating wavelength of the antenna.

**[0003]** It should be understood that a miniature antenna as used within this application refers to an antenna structure with physical dimensions that are small relative to the operational wavelength of the antenna. The actual physical dimensions of the miniature antenna will, therefore, vary depending upon the particular application. For instance, one exemplary application for a miniature antenna is a long wavelength HF communication antenna. Such antennas are often located onboard ships for which a small dimensioned antenna structure may be desirable. A typical long wavelength HF antenna onboard a ship that operates in the 2-30 MHz range may, for example, be ten (10) to fifty (50) meters in height, and can be significantly reduced in size using a miniature antenna structure, as described herein. In comparison, if a miniature antenna structure, as describe herein, is used as the antenna in a cellular telephone, then the overall physical dimensions of the miniature antenna will be significantly smaller. For this document a grid dimension curve may have a grid dimension greater than 1.2, 15, 1.65 or 1.9. A built in antenna is known from JP2003 03022. A capacitively loaded antenna and an antenna assembly is known from WO 01/39321. A miniature broad band ring-like microstrip patch as trans is known from WO/02/06371411 WO 2004/025778A1, which forms prior art according Art. 54(3) EPC, shows coupled multi band antennas.

## SUMMARY

**[0004]** A miniature antenna according to the invention is given by claim 1. Preferred embodiments are disclosed in the dependent claim 5.

## BRIEF DESCRIPTION OF THE DRAWINGS

### [0005]

Fig. 1 shows one example of a space-filling curve; Figs. 2-5 illustrate an exemplary two-dimensional antenna geometry forming a grid dimension curve; Fig. 6 shows a three-dimensional view of an exemplary miniature antenna having an extruded volumetric structure;

Fig. 7 is a three-dimensional view of another exemplary miniature antenna having an extruded volumetric structure;

Fig. 8 is a three-dimensional view of an additional exemplary miniature antenna having an extruded volumetric structure;

Fig. 9 is a three-dimensional view of a further exemplary miniature antenna having an extruded volumetric structure;

Fig. 10 is a three-dimensional view of an exemplary miniature antenna having extruded portions;

Figs. 11A-11C show an exemplary miniature antenna with a parasitic slotted grid dimension curve;

Fig. 12 is a three-dimensional view of an exemplary miniature antenna with four parallel-fed radiating arms arranged in a volumetric structure;

Fig. 13 shows one alternative example of the exemplary miniature antenna of Fig. 12 that includes a top-loading portion.

Fig. 14 is a three-dimensional view of an exemplary miniature antenna with two parallel-fed vertically stacked radiating arms;

Fig. 15 shows one alternative example of the exemplary miniature antenna of Fig. 14 that includes three or more parallel-fed vertically stacked radiating arms;

Fig. 16 is a three-dimensional view of an exemplary miniature folded monopole antenna;

Fig. 17 shows one alternative example of the exemplary miniature antenna of Fig. 16 that includes two or more folded portions;

Figs. 18A-18C show an exemplary miniature antenna having an active radiating arm and a plurality of parasitic radiating arms.

Figs. 18D and 18E show two alternative configurations for the miniature antenna of Figs. 18A-18C.

Figs. 19A and 19B show an exemplary miniature antenna with a plurality of half-wavelength resonant radiating arms;

Figs. 20A and 20B show one alternative example of the miniature antenna of Figs. 19A and 19B;

Figs. 21A and 21B show an alternative example of

the miniature antenna of Figs. 20A and 20B having a quarter wavelength center-feed radiating arm; Figs. 22A and 22B show another alternative example of the miniature antenna of Figs. 21A and 21B; Figs. 23A-23C show an exemplary miniature antenna having a pyramidal structure; Figs. 24A-24C shown an exemplary miniature antenna having a rhombic structure; Figs. 25 and 26 show an exemplary miniature antenna having a polyhedral structure; Fig. 27 is a three-dimensional view of an exemplary miniature cylindrical slot antenna; Fig. 28 is a three-dimensional view of an exemplary miniature antenna having an active radiating arm and a side-coupled parasitic radiating arm; Fig. 29 is a three-dimensional view of an exemplary miniature antenna having an active radiating arm and an inside-coupled parasitic radiating arm; Fig. 30 is a three-dimensional view of an embodiment of the miniature antenna having active and parasitic radiating arms with electromagnetically coupled top-loading portions; Fig. 31 shows one alternative embodiment of the miniature antenna of Fig. 30; Fig. 32 shows another alternative embodiment of the miniature antenna of Fig. 30; Fig. 33 is a three-dimensional view of an exemplary extruded miniature antenna having an extruded top-loading portion; Fig. 34 is a three-dimensional view of an exemplary miniature antenna having two parallel radiating arms with a common top-loading portion; Fig. 35 is a three-dimensional view of an exemplary top-loaded two branch grid dimension curve antenna; and Fig. 36 is a three-dimensional view of an exemplary top-loaded four branch grid dimension curve antenna.

#### DETAILED DESCRIPTION

**[0006]** Referring now to the remaining drawing figures, Figs. 2-5 illustrate an exemplary two-dimensional antenna geometry 20 forming a grid dimension curve. The grid dimension of a curve may be calculated as follows. A first grid having square cells of length L1 is positioned over the geometry of the curve, such that the grid completely covers the curve. The number of cells (N1) in the first grid that enclose at least a portion of the curve are counted. Next, a second grid having square cells of length L2 is similarly positioned to completely cover the geometry of the curve, and the number of cells (N2) in the second grid that enclose at least a portion of the curve are counted. In addition, the first and second grids should be positioned within a minimum rectangular area enclosing the curve, such that no entire row or column on the perimeter of one of the grids fails to enclose at least a portion of the curve. The first grid should include at least twenty-

five cells, and the second grid should include four times the number of cells as the first grid. Thus, the length (L2) of each square cell in the second grid should be one-half the length (L1) of each square cell in the first grid. The grid dimension (Dg) may then be calculated with the following equation:

$$D_g = -\frac{\log(N2) - \log(N1)}{\log(L2) - \log(L1)}.$$

**[0007]** For the purposes of this application, the term grid dimension curve is used to describe a curve geometry having a grid dimension that is greater than one (1). The larger the grid dimension, the higher the degree of miniaturization that may be achieved by the grid dimension curve in terms of an antenna operating at a specific frequency or wavelength. In addition, a grid dimension curve may, in some cases, also meet the requirements of a space-filling curve, as defined above. Therefore, for the purposes of this application a space-filling curve is one type of grid dimension curve.

**[0008]** Fig. 2 shows an exemplary two-dimensional antenna 20 forming a grid dimension curve with a grid dimension of approximately two (2). Fig. 3 shows the antenna 20 of Fig. 2 enclosed in a first grid 30 having thirty-two (32) square cells, each with a length L1. Fig. 4 shows the same antenna 20 enclosed in a second grid 40 having one hundred twenty-eight (128) square cells, each with a length L2. The length (L1) of each square cell in the first grid 30 is twice the length (L2) of each square cell in the second grid 40 (L1 = 2xL2). An examination of Figs. 3 and 4 reveal that at least a portion of the antenna 20 is enclosed within every square cell in both the first and second grids 30, 40. Therefore, the value of N1 in the above grid dimension (Dg) equation is thirty-two (32) (i.e., the total number of cells in the first grid 30), and the value of N2 is one hundred twenty-eight (128) (i.e., the total number of cells in the second grid 40). Using the above equation, the grid dimension of the antenna 20 may be calculated as follows:

$$D_i = -\frac{\log(128) - \log(32)}{\log(L1/2) - \log(L1)} = 2$$

**[0009]** For a more accurate calculation of the grid dimension, the number of square cells may be increased up to a maximum amount. The maximum number of cells in a grid is dependant upon the resolution of the curve. As the number of cells approaches the maximum, the grid dimension calculation becomes more accurate. If a grid having more than the maximum number of cells is selected, however, then the accuracy of the grid dimension

sion calculation begins to decrease. Typically, the maximum number of cells in a grid is one thousand (1000).

**[0010]** For example, Fig. 5 shows the same antenna 20 enclosed in a third grid 50 with five hundred twelve (512) square cells, each having a length L3. The length (L3) of the cells in the third grid 50 is one half the length (L2) of the cells in the second grid 40, shown in Fig. 4. As noted above, a portion of the antenna 20 is enclosed within every square cell in the second grid 40, thus the value of N for the second grid 40 is one hundred twenty-eight (128). An examination of Fig. 5, however, reveals that the antenna 20 is enclosed within only five hundred nine (509) of the five hundred twelve (512) cells of the third grid 50. Therefore, the value of N for the third grid 50 is five hundred nine (509). Using Figs. 4 and 5, a more accurate value for the grid dimension (D) of the antenna 20 may be calculated as follows:

$$D_8 = -\frac{\log(509) - \log(128)}{\log(L2/2) - \log(L2)} \approx 1.9915$$

**[0011]** Fig. 6 shows a three-dimensional view of an exemplary miniature antenna 60 provided as an example for a better understanding of the invention and having an extruded volumetric structure. Also shown are x, y and z axes to help illustrate the orientation of the antenna 60. The antenna 60 includes a radiating arm that defines a grid dimension curve 62 in the xy plane. More particularly, the grid dimension curve 62 extends continuously in the xy plane between a first end point 64 and a second end point 66, and forms a rectangular periphery in the xy plane. In addition, the antenna 60 includes an extruded portion 68 that extends away from the grid dimension curve 62 in a direction parallel to the z axis, forming a three-dimensional representation of the grid dimension curve 62. A feeding point 70 is located at a point on the extruded portion 68 along the z axis from the first end point 64 of the grid dimension curve 62. Also illustrated is a ground plane 72 in the xz plane that is separated from the antenna 60 by a pre-defined distance. The antenna 60 could, for example, be separated from the ground plane 72 by some type of dielectric material, as known to those skilled in the art.

**[0012]** In operation, the feeding point 70 of the antenna 60 is coupled to circuitry to send and/or receive RF signals within a pre-selected frequency band. The frequency band of the antenna 60 may be tuned, for example, by changing the overall length of the grid dimension curve 62. The location of the feeding point 70 on the antenna 60 affects the resonant frequency and impedance of the antenna 60, and can therefore alter the bandwidth and power efficiency of the antenna 60. Thus, the position of the feeding point 70 may be selected to achieve a desired balance between bandwidth and power efficiency. It should be understood, however, that the operational characteristics of the antenna 60, such as resonant fre-

quency, impedance bandwidth, voltage standing wave ratio (VSWR) and power efficiency, may also be affected by varying other features of the antenna 60, such as the type of conductive material, the distance between the antenna 60 and the ground plane 72, the length of the extruded portion 68, or other physical characteristics.

**[0013]** Fig. 7 is a three-dimensional view of another exemplary miniature antenna 80 provided as an example for a better understanding of the invention and having an extruded volumetric structure. This example 80 is similar to the antenna 60 described above with reference to Fig. 6, except that the feeding point 82 of the antenna is positioned at the first end point 64 of the grid dimension curve 62 and the antenna 80 includes a grounding point 84 that is coupled to the ground plane 72 at the second end point 66 of the grid dimension curve 62. As noted above, the position of the feeding point 82 affects the impedance, VSWR, bandwidth and power efficiency of the antenna 80. Similarly, coupling the antenna 80 to the ground plane 72 has an effect on the impedance, resonant frequency and bandwidth of the antenna 80.

**[0014]** Fig. 8 is a three-dimensional view of an additional exemplary miniature antenna 90 provided as an example for a better understanding of the invention and having an extruded volumetric structure. This example 90 is similar to the antenna shown in Fig. 7, except that the feeding point 92 is located at a corner of the extruded portion 68 of the antenna 90 along the z axis from the first end point 64 of the grid dimension curve 62.

**[0015]** Fig. 9 is a three-dimensional view of a further exemplary miniature antenna 100 having an extruded volumetric structure provided as an example for a better understanding of the invention. This example 100 is similar to the example 90 shown in Fig. 8, except the antenna 100 is tilted, forming an angle  $\theta$  between the antenna 100 and the ground plane 72. In addition, the grounding point 102 in this embodiment 100 is coupled to a corner of the extruded portion 68 of the antenna 100 opposite the second end point 66 of the grid dimension curve 62. As noted above, the distance between the antenna 100 and the ground plane 100, as well as the grounding point position, can affect the operational characteristics of the antenna 100, such as the frequency band and power efficiency. Thus, the angle  $\theta$  between the antenna 100 and the ground plane 72 can be selected to help achieve the desired antenna characteristics.

**[0016]** Fig. 10 is a three-dimensional view of an exemplary miniature antenna 110 having extruded portions 112 provided as an example for a better understanding of the invention. Also shown are x, y and z axes to help illustrate the orientation of the antenna 110. The antenna 110 includes a radiating arm that defines a grid dimension curve 114 in the xy plane. More particularly, the grid dimension curve 114 extends continuously in the xy plane from a first end point 116 to a second end point 118, with the feeding point 120 of the antenna 110 located at the first end point 116 of the grid dimension curve 114. In addition, sections of the grid dimension curve 114 are

extruded in a direction along the z axis to form the plurality of extruded portions 112. Similar to the antennas described above, the frequency band of the antenna 110 may be tuned by changing the overall length of the grid dimension curve 114 or other physical characteristics of the antenna 110.

**[0017]** In the antenna 110 shown in Fig. 10, the extruded portions 112 of the antenna 110 are located on segments of the grid dimension curve 114 that are parallel with the y axis. In another similar example however, the extruded portions 112 of the antenna 100 may be located at positions along the grid dimension curve 114 that have relatively high current densities.

**[0018]** Figs. 11A-11C show an exemplary miniature antenna 120 with a parasitic slotted grid dimension curve provided as an example for a better understanding of the invention. The antenna 120 includes an active radiating arm 122 and a parasitic radiating arm 124. Fig. 11A is a cross-sectional view showing the orientation between the active 122 and parasitic 124 radiating arms of the antenna 120, Fig. 11B is a front view showing the active radiating arm 122 of the antenna 120, and Fig. 11C is a rear view showing the parasitic radiating arm 124 of the antenna 120.

**[0019]** Fig. 11A shows a cross-sectional view of the antenna 120 in an xy plane. Also illustrated is a cross-sectional view of a ground plane 126. The active radiating arm 122 is separated from the ground plane 126 by a pre-determined distance, and extends away from the ground plane 126 along the y axis. The active radiating arm 122 may, for example, be separated from the ground plane 126 by a dielectric material. The parasitic radiating arm 124 is coupled at one end to the ground plane 126 and extends away from the ground plane 126 parallel to the active radiating arm 126. The distance between the active 122 and parasitic 124 radiating arms is chosen to provide electromagnetic coupling. This electromagnetic coupling increases the effective volume and enhances the frequency bandwidth of the antenna 120. Also illustrated in Fig. 11A is an antenna feeding point 128 located on the active radiating arm 122 of the antenna 120.

**[0020]** Fig. 11B is a three-dimensional view showing the active radiating arm 122 of the antenna 120. The active radiating arm 122 includes a conductor 130 that defines a grid dimension curve extending continuously from a first end point 132 to a second end point 134. The feeding point 128 of the antenna 120 is preferably located at the first end point 132 of the conductor 130. The active radiating arm 122 may be fabricated by patterning the conductor 130 onto a substrate material (as shown) to form a grid dimension curve, by cutting or molding the conductor 130 into the shape of a grid dimension curve 130, or by some other suitable antenna fabrication method.

**[0021]** Fig. 11C is a three-dimensional view showing the parasitic radiating arm 124 of the antenna 120. The parasitic radiating arm 124 is a slot antenna that includes a grid dimension curve 136 defined by a slot in a con-

ductive structure 138, such as a conductive plate. The conductive structure 138 is coupled to the ground plane 126. The grid dimension curve 136 in the parasitic radiating arm 124 is preferably the same pattern as the grid dimension curve 130 in the active radiating arm 122 of the antenna 120.

**[0022]** Fig. 12 is a three-dimensional view of an exemplary miniature antenna 140 with four parallel-fed radiating arms 142A-142D arranged in a volumetric structure as an example provided for a better understanding of the invention. Also shown are x, y, and z axes to help illustrate the orientation of the antenna 140. Each of the four radiating arms 142A-142D is a conductor that defines a grid dimension curve in a plane perpendicular to the xz plane, and is coupled at one end to a common feeding portion 148, 150. The radiating arms 142A-142D may be attached to a dielectric substrate 145 (as shown), but may alternatively be formed without the dielectric substrate 145, for example, by cutting or molding a conductive material into the shape of the grid dimension curve, or by some other suitable method. Also shown is a ground plane 152 that is separated from the common feeding point 148, 150 by some pre-defined distance. The ground plane 152 could, for example, be separated from the antenna 140 by a dielectric material.

**[0023]** Each radiating arm 142A-142D is aligned perpendicularly with two other radiating arms, forming a box-like structure with open ends. More particularly, a first radiating arm 142A defines a grid dimension curve parallel to the yz plane, a second radiating arm 142B defines a grid dimension curve in the xy plane, a third radiating arm 142C defines a grid dimension curve in the yz plane, and a fourth radiating arm 142D defines a grid dimension curve parallel to the xy plane. Each grid dimension curve 142A-142D includes a first end point 144 and extends continuously within its respective plane to a second end point 146 that is coupled to the common feeding portion 148, 150.

**[0024]** The common feeding portion 148, 150 includes a rectangular portion 148 that is coupled to the second end points 146 of the four radiating arms 142A-142D, and also includes an intersecting portion 150. The center of the intersecting portion 150 may, for example, be the feeding point of the antenna that is coupled to a transmission medium, such as a transmission wire or circuit trace. In other exemplary embodiments, the common feeding portion 148, 150 could include only the rectangular portion 148 or the intersecting portion 150, or could include some other suitable conductive portion, such as a solid conductive plate.

**[0025]** In operation, the frequency band of the antenna 140 is defined in significant part by the respective lengths of the radiating arms 142A-142D. In order to achieve a larger bandwidth, the lengths may be slightly varied from one radiating arm to another, such that the radiating arms 142A-142D resonate at different frequencies and have overlapping bandwidths. Similarly, a multi-band antenna may be achieved by varying the lengths of the radiating

arms 142A-142D by a greater amount, such that the resonant frequencies of the different arms 142A-142D do not result in overlapping bandwidths. It should be understood, however, that the antenna's operational characteristics, such as bandwidth and power efficiency, may be altered by varying other physical characteristics of the antenna. For example, the impedance of the antenna may be affected by varying the distance between the antenna 140 and the ground plane 152.

**[0026]** Fig. 13 shows one alternative example 160 of the exemplary miniature antenna 140 of Fig. 12 that includes a top-loading portion 162. This antenna 160 is similar to the antenna 140 described above with reference to Fig. 12, except that a top-loading portion 162 is coupled to each of the radiating arms 142A-142D. The top-loading portion 162 includes a solid conductive portion 164 that is aligned above (along the y axis) the radiating arms 142A-142D in the xz plane, and four protruding portions 166 that electrically couple the solid conductive portion 164 to the first end points 144 of each of the radiating arms 142A-142D.

**[0027]** Fig. 14 is a three-dimensional view of an exemplary miniature antenna 170 with two parallel-fed vertically stacked radiating arms 171, 174 as an example provided for a better understanding of the present invention. This antenna 170 is similar to the antenna 140 shown in Fig. 12, except that only two radiating arms 171, 174 are included in this embodiment 170. A first radiating arm 171 is a conductor that defines a grid dimension curve in the xy plane, and a second radiating arm 174 is a conductor that forms a grid dimension curve parallel to the first radiating arm. Both radiating arms 171, 174 are coupled to a common feeding portion 148, 150, as described above with reference to Fig. 12.

**[0028]** Fig. 15 shows one alternative example 190 of the exemplary miniature antenna 170 of Fig. 14 that includes three or more parallel-fed vertically stacked radiating arms. This embodiment 190 is similar to the antenna 170 shown in Fig. 14, except at least one additional radiating arm 192 is included that defines a grid dimension curve(s) parallel to the first two radiating arms 171, 174. In addition, one or more additional segment(s) 194 is added to the common feeding portion 143, 150 in order to couple the feeding portion 143, 150, 194 to the additional grid dimension curve(s) 192.

**[0029]** Fig. 16 is a three-dimensional view of an exemplary miniature folded monopole antenna 1000 as an example provided for a better understanding of the invention. The antenna 1000 includes a radiating arm with a vertical portion 1009, a folded portion 1011, and a top portion 1014. Also illustrated is a ground plane 1016. The vertical portion 1009 includes a conductor 1010 that defines a first grid dimension curve in a plane perpendicular to the ground plane 1016. Similarly, the folded portion 1011 includes a conductor 1012 that defines a second grid dimension curve in a plane perpendicular to the ground plane 1016 and parallel with the vertical portion 1009.

**[0030]** The top portion 1014 includes a conductive plate that couples the first grid dimension curve 1010 to the second grid dimension curve 1012. In other examples, however, the top portion 1014 may include a conductive trace or other type of conductor to couple the first and second grid dimension curves 1010, 1012. In one example, for example, the top portion may define another grid dimension curve that couples the first and second grid dimension curves 1010, 1012.

**[0031]** The first grid dimension curve 1010 includes a first end point 1018 and extends continuously to a second end point 1019. The antenna 1000 is preferably fed at or near the first end point 1018 of the first grid dimension curve 1010. Similarly, the second grid dimension curve 1012 includes a first end point 1020 and extends continuously to a second end point 1021, which is coupled to the ground plane 1016. The second end point 1019 of the first grid dimension curve 1010 is coupled to the first end point 1020 of the second grid dimension curve 1012 by the conductor on the top portion 1014 of the antenna 1000, forming a continuous conductive path from the antenna feeding point to the ground plane 1016.

**[0032]** Fig. 17 shows one alternative example 1100 of the exemplary miniature antenna 1000 of Fig. 16 that includes a vertical portion 1009 and two or more folded portions 1011, 1105. This example 1100 is similar to the antenna 1000 described above with respect to Fig. 16, with the addition of at least one additional folded portion(s) 1105. The additional folded portion(s) 1105 includes a conductor(s) 1110 that defines an additional grid dimension curve(s) in a plane perpendicular to the ground plane 1016 and parallel to the vertical portion 1009. More particularly, the additional grid dimension curve(s) 1110 includes a first end point 1112 coupled to the top portion 1014, and extends continuously from the first end point 1112 to a second end point 1114, which is coupled to the ground plane 1016. The inclusion of the additional folded portion(s) 1105 in the antenna structure 1100 may, for example, increase the bandwidth and power efficiency of the antenna 1100.

**[0033]** Figs. 18A-18C show an exemplary miniature antenna 1200 having an active radiating arm 1210 and three parasitic radiating arms 1212-1216 as an example provided for a better understanding of the invention. Fig. 18A is a top view of the antenna 1200, and Figs. 18B and 18C are respective side views of the antenna 1200.

**[0034]** With reference to Fig. 18A, the antenna 1200 includes four top loading portions 1218-1224 that are perpendicular to the four radiating arms 1210-1216. Fig. 18 shows a top view of the top-loading portions 1218-1224 and cross-sectional view of the four radiating arms 1210-1216. The cross-sections of the active radiating arm 1210 and one of the parasitic radiating arms 1214 are aligned in a first plane (A), and the cross-sections of the other two parasitic radiating arms 1212, 1216 are aligned in a second plane (B) that is perpendicular to both the first plane (A) and the plane of the top-loading portions 1218-1224 (i.e., the plane of the paper). The

illustrated top-loading portions 1218-1224 include a rectangular-shaped conductive surface. It should be understood, however, that the top-loading portions 1218-1224 could include other conductive surfaces, such as a conductor defining a grid dimension curve. It should also be understood that differently shaped top-loading portions 1218-1224 could also be utilized.

**[0035]** The edges of the top-loading portions 1218-1224 are aligned such that there is a pre-defined distance between adjacent top-loading portions. The pre-defined distance between adjacent top-loading portions 1218-1224 is preferably small enough to allow electromagnetic coupling. In this manner, the top-loading portions 1218-1224 provide improved electromagnetic coupling between the active and parasitic radiating arms 1210-1216 of the antenna 1200.

**[0036]** With reference to Figs. 18B and 18C, the active radiating arm 1210 and three parasitic radiating arms 1212-1216 of the antenna 1200 each include conductors 1201-1204 that define a grid dimension curve in a plane perpendicular to the top loading portions 1218-1224 and a ground plane 1228. The four grid dimension curves 1201-1204 are respectively coupled to the four top-loading portions 1218-1224. The grid dimension curve 1201 on the active radiating arm 1210 of the antenna 1200 includes a first end point 1230 and extends continuously to a second end point that is coupled to the conductive surface of one top-loading portion 1218. The feeding point of the antenna 1200 is preferably located at or near the first-end point 1230 of the active radiating arm 1210. The grid dimension curves 1202-1204 on the three parasitic radiating arms 1212-1216 each include a first end point 1235 coupled to the ground plane 1228, and extend in a continuous path from the first end point 1235 to a second end point coupled to one of the top-loading portions 1220-1224.

**[0037]** Figs. 18D and 18E show two alternative configurations for the miniature antenna of Figs. 18A-18C. Fig. 18D is a top view showing one exemplary example 1240 in which the active radiating arm 1242 and the three parasitic radiating arms 1244-1248 of the antenna 1240 are aligned in parallel planes (A-D). In addition, the active radiating arm 1242 and parasitic radiating arms 1244-1248 in this example 1240 are each adjacent to two top-loading portions 1218-1224. The end points 1249 of the respective grid dimension curves 1201-1204 are each coupled to one top-loading portion 1218-1224. Fig. 18E is a top view showing another exemplary example 1250 in which the active radiating arm 1256 is aligned in a first plane (A) with one parasitic radiating arm 1258, and the two other parasitic radiating arms 1252, 1255 are aligned in a second plane (B) that is parallel to the first plane.

**[0038]** Figs. 19A and 19B show an exemplary miniature antenna 1300 with a plurality of half-wavelength resonant radiating arms 1302-1310 as an example provided for a better understanding of the invention. Fig. 19A is a three-dimensional view of the antenna 1300 showing the

orientation of the antenna 1300 with reference to a ground plane 1328. Also shown in Fig. 19A are x, y, and z axes to help illustrate the orientation of the antenna 1300. The antenna 1300 includes five radiating arms 1302-1310 that are each aligned parallel with one another and perpendicular to the ground plane 1328, and four connector segments 1324-1327. Each radiating arm 1302-1310 includes a conductor 1311-1315 that defines a grid dimension curve in the plane of the respective radiating arm 1302-1310. The antenna conductors 1311-1315 may be attached to a dielectric substrate (as shown), or may alternatively be formed without a dielectric substrate, for example, by cutting or molding the conductor 1311-1315 into the shape of a grid dimension curve.

**[0039]** The grid dimension curves 1311-1315 are coupled together at their end points by the connector segments 1324-1327, forming a continuous conductive path from a feeding point 1320 on the left-most radiating arm 1302 to a grounding point 1322 on the right-most radiating arm 1310 that is coupled to the ground plane 1328. In addition, the length of each grid dimension curve 1311-1315 is chosen to achieve a 180° phase shift in the current in adjacent radiating arm 1302-1310.

**[0040]** Fig. 19B is a schematic view 1350 of the antenna 1300 illustrating the current flow through each radiating arm 1302-1310. As a result of the 180° phase shift, the current in each radiating arm 1302-1310 radiates in the same vertical direction (along the y axis), causing all parallel radiating arms 1302-1310 to contribute in phase to the radiation.

**[0041]** Figs. 20A and 20B show one alternative example 1400 of the miniature antenna 1300 of Figs. 19A and 19B. Fig. 20A is a three-dimensional view showing the orientation of the antenna 1400. This embodiment 1400 is similar to the miniature antenna 1300 of Fig. 19A except that the feeding point 1410 of the antenna 1400 is located at an end point of the grid dimension curve 1313 on the center-most radiating arm 1306, effectively forming a monopole antenna with two symmetrical branches. One antenna branch is formed by the two left-most radiating arms 1302, 1304, and the other branch is formed by the two right-most radiating arms 1308, 1310. In addition, the antenna 1400 includes an upper connector portion 1420 and two lower connector portions 1422, 1424. The upper connector portion 1420 couples together one end point from each of the three center grid dimension curves 1312, 1313, 1314, and the two lower connector portions 1422, 1424 each couple together end points of the grid dimension curves 1311, 1312, 1314, 1315 in the respective symmetrical branches. In addition, the length of each grid dimension curve 1311-1315 is selected to achieve a 180° phase shift in the current in adjacent radiating arms 1302-1310.

**[0042]** Fig. 20B is a schematic view 1450 of the antenna 1400 illustrating the current flow through each radiating arm 1302-1310. As described above, the 180° phase shift causes the current in each radiating arm 1302-1310

to radiate in the same vertical direction (along the y axis).

**[0043]** Figs. 21A and 21B show an alternative example 1500 of the miniature antenna 1400 of Figs. 20A and 20B having a quarter wavelength center-feed radiating arm 1510. Fig. 21A is a three-dimensional view showing the orientation of the antenna 1500. This example 1500 is similar to the antenna 1400 of Fig. 20A, except that the grid dimension curve 1520 on the center-most radiating arm 1510 is shorter in length than the grid dimension curves 1311, 1312, 1314, 1315 on the other four radiating arms 1302, 1304, 1308, 1310. The length of the center-most grid dimension curve 1520 is selected to achieve a 90° phase shift in current between the center-most radiating arm 1510 and the adjacent radiating arms 1304, 1308. The lengths of the other four radiating arms 1302, 1304, 1308, 1310 are chosen to achieve a 180° phase shift in current, as described above.

**[0044]** Fig. 21B is a schematic view 1550 of the antenna illustrating the current flow through each radiating arm 1302, 1304, 1308, 1310, 1510. Similar to the antenna 1400 described above with reference to Fig. 20B, the 90° and 180° phase shifts in this antenna example cause the current in each radiating arm 1302, 1304, 1308, 1310, 1510 to radiate in the same vertical direction (along the y axis). The shorter length of the center grid dimension curve 1520 may, however, be desirable to tune the impedance of the antenna.

**[0045]** Figs. 22A and 22B show another alternative example 1600 of the miniature antenna 1500 of Figs. 21A and 21B. Fig. 22A is a three-dimensional view showing the orientation of the antenna 1600. This antenna example 1600 is similar to the antenna 1500 of Fig. 21A, except the center-most radiating arm 1610 includes a solid conductive portion 1620 coupled to an end point of the center grid dimension curve 1520. The solid conductive portion 1620 may, for example, function as a feeding point to couple the center grid dimension curve 1520 to a transmission medium 1630, such as a coaxial cable. As noted above, the length of the center-most grid dimension curve 1520 is selected to achieve a 90° current phase shift, and the lengths of the other four radiating arms 1302, 1304, 1308, 1310 are chosen to achieve a 180° current phase shift.

**[0046]** Fig. 22B is a schematic view 1650 of the antenna 1600 illustrating the current flow through each radiating arm 1302, 1304, 1610, 1308, 1310. As noted above, the 90° and 180° phase shifts cause the current in each radiating arm 1302, 1304, 1610, 1308, 1310 to radiate in the same vertical direction (along the y axis).

**[0047]** Figs. 23A-23C show an exemplary miniature antenna 1700 having a pyramidal structure as an example provided for a better understanding of the invention. The antenna 1700 includes a square-shaped base 1710 and four triangular-shaped surfaces 1712-1718 that are coupled together at the edges to form a four-sided pyramid. Fig. 23A is a side view of the antenna 1700 showing two of the four triangular-shaped surfaces 1714, 1716. Fig. 23B is a top view showing the square-shaped base

1710 of the antenna 1700. Fig. 23C is a bottom view of the antenna 1700 showing the four triangular-shaped surfaces 1712-1718.

**[0048]** With reference to Figs. 23A and 23C, the four triangle-shaped surfaces 1712-1718 of the antenna 1700 each include a conductor 1720-1726 that defines a grid dimension curve in the plane of the respective surface 1712-1718. One end point of each of the grid dimension curves 1720-1726 is coupled to a common feeding point 1730, preferably located at or near the apex of the pyramid. The other end point of the grid dimension curves 1720-1726 is coupled to the square-shaped base 1720, as shown in Fig. 23B. Schematically, the grid dimension curves 1720-1726 form four parallel conductive paths from the common feeding point 1730 to the square-shaped base 1710.

**[0049]** With reference to Fig. 23B, the square-shaped base 1710 includes conductors 1732-1738 that define four additional grid dimension curves. Each grid dimension curve 1732-1738 on the base 1710 is coupled at one end point to one of the grid dimension curves 1720-1726 on the triangular-shaped surfaces 1712-1718 of the antenna 1700. The other end points of the grid dimension curves 1732-1738 on the square-shaped base 1710 are coupled together at one common point 1740. In one example, the common point 1740 on the base 1710 of the antenna 1700 may be coupled to a ground potential to top load the antenna 1700.

**[0050]** It should be understood that, in other examples, the antenna 1700 could instead include a differently-shaped base 1718 and a different number of triangular-shaped surfaces 1712-1718. For instance, one alternative example of the antenna 1700 could include a triangular-shaped base 1710 and three triangular-shaped surfaces. Other alternative examples could include a polygonal-shaped base 1710, other than a square, and a corresponding number of triangular-shaped surfaces. It should also be understood, that the grid dimension curves 1720-1726, 1732-1738 of the antenna 1700 may be attached to a dielectric substrate material (as shown), or may alternatively be formed without the dielectric substrate.

**[0051]** Figs. 24A-24C show an exemplary miniature antenna 1800 having a rhombic structure as an example provided for a better understanding of the present invention. Fig. 24A is a side view of the antenna 1800, and Figs. 24B and 24C are top and bottom views, respectively. The antenna 1800 includes eight triangular-shaped surfaces 1810-1824. Four of the triangular-shaped surfaces 1810-1816 are coupled together at the edges to form an upper four-sided pyramid (Fig. 24B) with an upward-pointing apex 1841, and the other four triangular-shaped surfaces 1818-1824 are coupled together to form a lower four-sided pyramid (Fig. 24C) with a downward-pointing apex 1842. The edges at the bases of the two four-sided pyramids are coupled together, as shown in Fig. 24A, to form the rhombic antenna structure.

**[0052]** The surfaces 1810-1824 of the antenna 1800



each include a conductor 1826-1840 that defines a grid dimension curve in the plane of the respective surface 1810-1824. The end points of the grid dimension curves 1826-1840 are coupled together to form a conductive path having a feeding point at the downward-pointing apex 1842. More specifically, with reference to Fig. 24C, the four grid dimension curves 1834-1840 on the surfaces 1818-1824 of the lower pyramid are each coupled at one end point to a common feeding point located at the downward-pointing apex 1842. The other end point of each the lower grid dimension curves 1834-1840 is coupled to an end point on one of the grid dimension curves 1826-1832 on the upper pyramid, as shown in Fig. 24A. With reference to Fig. 24B, the other end points of the grid dimension curves 1826-1832 on the upper pyramid are coupled together at a common point located at the upward-pointing apex 1841 of the antenna 1800. Schematically, the antenna 1800 provides four parallel electrical paths between the feeding point 1842 and the common point at the upward-pointing apex 1841.

**[0053]** It should be understood that other rhombic structures having a different number of surfaces could be utilized in other embodiments of the antenna 1800. It should also be understood that the grid dimension curves 1826-1840 of the antenna 1800 may be attached to a dielectric substrate material (as shown), or may alternatively be formed without the dielectric substrate.

**[0054]** Figs. 25 and 26 show an exemplary miniature antenna 1900 having a polyhedral structure as an example provided for a better understanding of the invention. Fig. 25 is a three-dimensional view of the miniature polyhedral antenna 1900. The antenna 1900 includes six surfaces 1910-1920 that are coupled together at the edges to form a cube. In other example however, the antenna 1900 could include a different number of surfaces, forming a polyhedral structure other than a cube. Each surface 1910-1920 of the antenna includes a conductor 1922-1932 that defines a grid dimension curve having two end points. One endpoint 1934 of the six grid dimension curves 1922-1932 is a feeding point for the antenna 1900, and the other endpoints are coupled together as shown in Fig. 26. The grid dimension curves 1922-1932 may be attached to a dielectric substrate material (as shown), or may alternatively be formed without a dielectric substrate, for example, by cutting or molding a conductive material into the shape of the grid dimension curves 1922-1932.

**[0055]** Fig. 26 is a two-dimensional representation of the miniature polyhedral antenna of Fig. 25, illustrating the interconnection between the grid dimension curves 1922-1932 on each surface 1910-1920 of the antenna 1900. The solid black dots shown in Fig. 26 are included to illustrate the points at which the grid dimension curves 1922-1932 connect, and do not form part of the antenna structure 1900. The grid dimension curves 1922-1932 form three parallel electrical paths from a common feeding point 1936 to a common end point 1937. More particularly, a first set of three grid dimension curves 1922,

1924, 1928 are each coupled together at the common feeding point 1936. The other end points of the first set of grid dimension curves 1922, 1924, 1928 are each respectively coupled to one end point of a second set of three grid dimension curves 1932, 1926, 1930, which converge together at the common end point 1937.

**[0056]** In the illustrated example, the first set of three grid dimension curves 1922, 1924, 1928 each define a first type of space-filling curve, called a Hilbert curve, and the second set of three grid dimension curves 1926, 1932, 1930 each define a second type of space-filling curve, called an SZ curve. It should be understood, however, that other examples coupled include other types of grid dimension curves.

**[0057]** Fig. 27 is a three-dimensional view of an exemplary miniature cylindrical slot antenna 2000 as an example provided for a better understanding of the invention. The antenna 2000 includes a cylindrical conductor 2010 and a grid dimension curve 2012 that is defined by a slot through the surface of the conductor 2010. More particularly, the grid dimension curve 2012 extends continuously from a first end point 2014 to a second end point 2016. The antenna 2000 may, for example, be attached to a transmission medium at a feeding point on the cylindrical conductor 2010 to couple the antenna 2000 to transmitter and/or receiver circuitry. In addition, the length of the grid dimension curve 2012 may be pre-selected to help tune the operational frequency band of the antenna 2000.

**[0058]** Fig. 28 is a three-dimensional view of an exemplary miniature antenna 2100 having an active radiating arm 2110 and a side-coupled parasitic radiating arm 2112 as an embodiment of the invention. Also illustrated are x, y, and z axes to help illustrate the orientation of the antenna 2100. Both radiating arms 2110, 2112 are conductors that define grid dimension curves in, or parallel to, the xy plane, and are extruded in the direction of the z axis to define a width. The radiating arms 2110, 2112 may, for example, be visualized as conductive ribbons that are folded at points along their lengths to form three-dimensional representations of a grid dimension curve. More particularly, the active radiating arm 2110 includes a first end point 2114 and extends continuously in a grid dimension curve to a second end point 2116. The parasitic radiating arm 2112 is separated from the active radiating arm 2110 by a pre-defined distance in the direction of the z axis, and extends continuously in a grid dimension curve from a first end point 2118 to a second end point 2120. In addition, the shape of the active radiating arm 2110 is preferably the same or substantially the same as the shape of the parasitic radiating arm 2112, such that an edge of the active radiating arm 2110 is parallel to an edge of the parasitic radiating arm 2112.

**[0059]** Operationally, the antenna 2100 is fed at a point on the active radiating arm 2110 and is grounded at a point on the parasitic radiating arm 2112. The distance between the active and parasitic radiating arms 2110,

2112 is selected to enable electromagnetic coupling between the two radiating arms 2110, 2112, and may be used to tune impedance, VSWR, bandwidth, power efficiency, and other characteristics of the antenna 2100. The operational characteristics of the antenna 2100, such as the frequency band and power efficiency, may be tuned in part by selecting the length of the two grid dimension curves and the distance between the two radiating arms 2110, 2112. For example, the degree of electromagnetic coupling between the radiating arms 2110, 2112 affects the effective volume of the antenna 2100 and may thus enhance the antenna's bandwidth.

**[0060]** Fig. 29 is a three-dimensional view of an exemplary miniature antenna 2200 having an active radiating arm 2210 and an inside-coupled parasitic radiating arm 2212. Also illustrated are x, y, and z axes to help illustrate the orientation of the antenna 2200. Both radiating arms 2210, 2212 are ribbon-like conductors that define grid dimension curves in the xy plane, and that are extruded in the direction of the z axis to define a width. More particularly, the active radiating arm 2210 forms a continuous grid dimension curve in the xy plane from a first end point 2214 to a second end point 2216. Similarly, the parasitic radiating arm 2212 forms a continuous grid dimension curve in the xy plane from a first end point 2218 to a second end point 2220, and is separated by a pre-defined distance from an inside surface of the active radiating arm 2212.

**[0061]** Operationally, the antenna 2200 is fed at a point on the active radiating arm 2210 and is grounded at a point on the parasitic radiating arm 2212. Similar to the antenna 2100 described above with reference to Fig. 28, the operational characteristics of this antenna embodiment 2200 may be tuned in part by selecting the length of the grid dimension curves and the distance between the two radiating arms 2210, 2212.

**[0062]** Fig. 30 is a three-dimensional view of an embodiment of the miniature antenna 2300 having active 2310 and parasitic 2312 radiating arms with electromagnetically coupled top-loading portions 2314, 2316. Also illustrated are x, y, and z axes to help illustrate the orientation of the antenna 2300. Similar to the antenna structures 2210, 2212 shown in Fig. 28, the active 2310 and parasitic 2312 radiating arms in this embodiment 2300 are ribbon-like conductors that define grid dimension curves in, or parallel to, the xy plane, and that are extruded in the direction of the z axis to define a width. The active and parasitic radiating arms are separated by a pre-defined distance in the direction of the z axis. In addition, the antenna 2300 includes an active top-loading portion 2314 coupled to an end point of the active radiating arm 2310 and a parasitic top-loading portion 2316 coupled to an end point of the parasitic radiating arm 2312. The active and parasitic top-loading portions 2314, 2316 include planar conductors that are aligned parallel with the xz plane, and that are separated by a pre-defined distance in the direction of the y axis.

**[0063]** Operationally, the antenna 2300 is fed at a point

on the active radiating arm 2310 and is grounded at a point on the parasitic radiating arm 2312. The distance between the active 2314 and parasitic 2316 top-loading portions is selected to enable electromagnetic coupling between the two top-loading portions 2314, 2316. In addition, the distance between the active and parasitic radiating arms 2310, 2312 may be selected to enable some additional amount of electromagnetic coupling between the active 2310, 2314 and parasitic 2312, 2316 sections of the antenna 2300. As described above, the length of the grid dimension curves 2310, 2312, along with the degree of electromagnetic coupling between the active 2310, 2314 and passive 2312, 2316 sections of the antenna 2300, affect the operational characteristics of the antenna 2300, such as frequency band and power efficiency.

**[0064]** Fig. 31 shows one alternative example 2400 of the miniature antenna 2300 of Fig. 30. This antenna example 2400 is similar to the antenna 2300 described above with reference to Fig. 30, except that the active 2410 and parasitic 2412 radiating arms in this embodiment 2400 include planar conductors and the active 2414 and parasitic 2416 top-loading portions define grid dimension curves parallel to the xz plane. Similar to the antenna 2300 of Fig. 30, the operational characteristics of this antenna example 2400 are affected in large part by the length of the grid dimension curves 2414, 2416 and the degree of electromagnetic coupling caused by the distance between the top-loading portions 2414, 2416.

**[0065]** Fig. 32 shows another alternative embodiment of the miniature antenna of Fig. 30. This antenna embodiment 2500 is similar to the antennas 2300, 2400 described above with reference to Figs. 30 and 31, except that both the radiating arms 2510, 2512 and the top-loading portions 2514, 2516 in this embodiment 2500 define grid dimension curves. The active 2510 and parasitic 2512 radiating arms define grid dimension curves in, or parallel to, the xy plane, similar to the radiating arms 2310, 2312 shown in Fig. 30. The active 2514 and parasitic 2516 top-loading portions define grid dimension curves parallel to the xz plane similar to the top-loading portions 2414, 2416 shown in Fig. 31. In addition, the operational characteristics of this antenna embodiment 2500 are similarly affected in large part by the distance between the top-loading portions 2514, 2516 and the respective lengths of the grid dimension curves 2510-2516.

**[0066]** Fig. 33 is a three-dimensional view of an exemplary top-loaded miniature antenna 2600 provided for a better understanding of the invention. The antenna includes a ribbon-like radiating arm 2610 that defines a grid dimension curve in the xy plane and that is extruded in the direction of the z axis to define a width. More particularly, the radiating arm 2610 extends in the shape of a three-dimensional grid dimension curve from a first edge 2612 to a second edge 2614. In addition, the antenna 2600 includes a top-loading portion 2616 coupled to the second edge 2614 of the radiating arm 2610. The top-

loading portion 2616 is a planar conductor that extends away from the second edge 2614 of the radiating arm 2610 in a direction parallel with the x axis, and is extruded in the direction of the z axis to define a width that is greater than the width of the radiating arm 2610. The antenna 2600 is fed at a point on the radiating arm, preferably at or near the first edge 2612, and has an operational frequency band that is defined in large part by the length of the grid dimension curve.

**[0067]** Fig. 34 is a three-dimensional view of an exemplary miniature antenna provided for a better understanding of the invention having two parallel radiating arms 2710, 2712 with a common feeding portion 2714 and a common top-loading portion 2716. Also illustrated are x, y, and z axes to help illustrate the orientation of the antenna. The parallel radiating arms 2710, 2712 and the common feeding portion 2714 are each planar conductors aligned with, or parallel to, the xy axis, and the common top-loading portion 2716 is a planar conductor aligned parallel to the xz axis. The two radiating arms 2710, 2712 are separated by a pre-defined distance along the z axis, and are each coupled to the common feeding portion 2714 at one end and to the common top-loading portion 2716 at the other end. Schematically, the antenna 2700 includes two parallel electrical paths through the parallel radiating arms 2710, 2712 from the common feeding portion 2714 to the common top-loading portion 2716.

**[0068]** In addition, both of the illustrated parallel radiating arms 2710, 2712 includes three planar conductors 2718 and two winding conductors 2720, with the winding conductors 2720 each defining a grid dimension curve. In other embodiments, however, varying proportions of the radiating arms 2710, 2712 may be made up of one or more winding conductors 2720. In this manner, the effective conductor length of the radiating arms 2710, 2712, and thus the operational frequency band of the antenna 2700, may be altered by changing the proportion of the radiating arms 2710, 2712 that are made up by winding conductors 2720. The operational frequency band of the antenna 2700 may be further adjusted by changing the grid dimension of the winding conductors 2720. In addition, various operational characteristics of the antenna 2700, such as the frequency band and power efficiency, may also be tuned by varying the distance between the radiating arms 2710, 2712.

**[0069]** Fig. 35 is a three-dimensional view of an exemplary top-loaded two branch grid dimension curve antenna 2800 provided as an example for a better understanding of the invention. The antenna 2800 includes a common feeding portion 2805, two radiating arms 2810, 2812, and two top-loading portions 2814, 2816. The radiating arms 2810, 2812 are ribbon-like conductors that each define a grid dimension curve 2818, 2820 along a common plane. In addition, each radiating arm 2810, 2812 is extruded in a direction perpendicular to the respective grid dimension curve 2818, 2820 to define a width 2822, 2824, thus forming a three-dimensional rep-

resentation of the grid dimension curve 2818, 2820. More particularly, the radiating arms 2810, 2812 each include a bottom edge that is coupled to the common feeding portion 2805 and extend continuously in the shape of a grid dimension curve 2828, 2820 to a top edge. The top edges of the radiating arms 2810, 2812 are each coupled to one of the top-loading portions 2814, 2816. In addition, the radiating arms 2810, 2812 are separated from each other along their widths 2822, 2824 by a pre-determined distance.

**[0070]** In operation, the frequency band of the antenna 2800 is defined in significant part by the respective lengths of the radiating arms 2810, 2812. Thus, the antenna frequency band may be tuned by changing the effective conductor length of the grid dimension curves 2810, 2812. This may be achieved, for example, by either increasing the overall length of the radiating arms 2810, 2812, or increasing the grid dimension of the grid dimension curves 2810, 2012. In addition, a larger bandwidth may be achieved by varying the lengths of the grid dimension curves 2818, 2820 from one radiating arm to another, such that the radiating arms 2810, 2812 resonate at slightly different frequencies. Similarly, a multi-band antenna may be achieved by varying the lengths of the radiating arms 2810, 2812 by a greater amount, such that the respective resonant frequencies do not result in overlapping frequency bands. It should be understood, however, that the antenna's operational characteristics, such as frequency band and power efficiency, may be altered by varying other physical characteristics of the antenna 2800. For example, the impedance of the antenna may 2800 be affected by varying the distance between the two radiating arms 2810, 2812.

**[0071]** Fig. 36 is a three-dimensional view of an exemplary top-loaded four branch grid dimension curve antenna 2900 provided for a better understanding of the invention. The antenna 2900 includes four radiating arms 2910-2916, a common, feeding portion 2918, 2919, and a common top-loading portion 2920. Each radiating arm 2910-2916 is a ribbon-like conductor that defines a planar grid dimension curve 2922 along an edge of the conductor 2910-2916, and is extruded in a direction perpendicular to the plane of the grid dimension curve 2922 to define a width 2924 of the conductor 2910-2916. In this manner, each radiating arm 2910-2916 forms a three-dimensional representation of a grid dimension curve. More particularly, the radiating arms 2910-2916 each include a bottom edge that is coupled to the common feeding portion 2918, 2919 and extend continuously in the shape of a grid dimension curve 2922 to a top edge coupled to the common top-loading portion 2920. The common feeding portion includes a vertical section 1918 to couple the antenna 2900 to a transmission medium and a horizontal section 2929 coupled to the four radiating arms 2910-2916.

**[0072]** The four radiating arms 2910-2916 lie in perpendicular planes along the edges of a rectangular array. Thus, the grid dimension curve 2922 in any radiating arm

2910 lies in the same plane as the grid dimension curve of one opposite radiating arm 2914 in the rectangular array, and lies in a perpendicular plane with two adjacent radiating arms 2912, 2916 in the rectangular array. The conductor width 2924 of any radiating arm 2910 lies in a parallel plane with the conductor width of one opposite radiating arm 2914, and lies in perpendicular planes with the conductor widths of two adjacent radiating arms 2912, 2916. In addition, each radiating arm 2910 is separated by a first pre-defined distance from the opposite radiating arm 2914 in the rectangular array and by a second pre-defined distance from the two adjacent radiating arms 2912, 2916 in the rectangular array.

**[0073]** In operation, the frequency band of the antenna 2900 is defined in significant part by the respective lengths of the radiating arms 2910-2916. Thus, the antenna frequency band may be tuned by changing the effective conductor length of the grid dimension curves 2922 of the four radiating arms 2910-2916. This may be achieved, for example, by either increasing the overall length of the radiating arms 2910-2916 or increasing the grid dimension of the grid dimension curves 2922. In addition, the antenna characteristics, such as frequency band and power efficiency, may also be affected by varying the first and second pre-defined distances between the four radiating arms 2910-2916.

**[0074]** It should be understood that other embodiments of the miniature antenna 2900 shown in Fig. 36 may include a different number of radiating arms that extend radially from a common feeding point. As the number of radiating arms in the antenna 2900 is increased, the antenna structure tends to a revolution-symmetric structure having a radial cross-section that defines a grid dimension curve.

**[0075]** This written description uses examples to disclose the invention, including the best mode, and also to enable a person skilled in the art to make and use the invention. The patentable scope of the invention is defined by the claims, and may include other examples that occur to those skilled in the art. For example, each of the miniature monopole antenna structures described above could be mirrored to form a miniature dipole antenna. In another embodiment, a plurality of miniature antennas may be grouped to radiate together by means of a power splitting/combining network. Such a group of miniature antennas may, for example, be used as a directional array by separating the antennas within the group by a distance that is comparable to the operating wavelength, or may be used as a broadband antenna by spacing the antennas at smaller intervals. Embodiments of the miniature antenna may also be used interchangeably as either a transmitting antenna or a receiving antenna. Some possible applications for a miniature antenna include, for example, a radio/or cellular antenna within an automobile, a communications antenna onboard a ship, an antenna within a cellular telephone or other wireless communications device, a high-power broadcast antenna, or other applications in which a small-dimensioned antenna

may be desirable.

## Claims

1. A miniature antenna (2300), having
  - a radiating arm (2310) that defines a grid dimension curve within a plane of the antenna;
  - the radiating arm (2310) having a planar portion that defines the grid dimension curve;
  - the radiating arm further having at least one extruded portion (68) extending from the planar portion to define a three-dimensional structure;
  - wherein the radiating arm (2310) is an active radiating arm that includes a feeding point to couple the antenna with a transmission medium;
  - wherein the antenna further comprises a first top-loading portion (2314) coupled to the radiating arm (2310);
  - wherein the antenna has physical dimensions that are small relative to the operational wavelength of the antenna,
  - characterized in that**
  - the antenna comprises a second radiating arm (2312) that defines a second grid dimension curve within a second plane of the antenna;
  - the second radiating arm (2312) having a planar portion that defines the second grid dimension curve;
  - the second radiating arm (2312) having at least one extruded portion extending from the planar portion to define a three-dimensional structure;
  - the second radiating arm (2312) is a parasitic radiating arm that is coupled to a ground potential; and
  - the radiating arm (2310) is electromagnetically coupled to the second radiating arm (2312);
  - wherein a second top-loading portion (2316) is coupled to the second radiating arm (2312);
  - wherein the first top-loading portion (2314) is electromagnetically coupled to the second top-loading portion (2316);
  - wherein the grid dimension curve defines a space-filling curve, the space filling curve being formed from a line, that includes at least ten segments with each segment forming an angle with an adjacent segment; and
  - wherein the first and second top-loading portions (2314, 2316) include planar conductors, that are aligned parallel and that are separated by a pre-defined distance in the direction perpendicular to the plane of the top-loading portions.
2. The miniature antenna of claim 1, wherein the grid dimension curve defines a rectangular periphery and/or
  - has a conductor length, and wherein the conductor length of the grid dimension curve is pre-selected to tune the frequency band of the antenna.

3. The miniature antenna of any of claims 1 or 2, wherein the feeding point is located on the planar portion of the radiating arm or the feeding point is located on the extruded portion (68) of the radiating arm. 5
4. The miniature antenna of any of the preceding claims, wherein the planar portion of the radiating arm (2310) is extruded in a direction perpendicular to the plane of the grid dimension curve to form the extruded portion of the radiating arm (3210), and wherein the extruded portion forms a three-dimensional representation of the grid dimension curve. 10
5. The miniature antenna of claim 4, wherein the miniature antenna is separated by a predefined distance from a ground plane. 15
6. The miniature antenna of claim 5, wherein the planar portion of the radiating arm (2310) is perpendicular to the ground plane or the plane of the grid dimension curve forms an angle ( $\ominus$ ) with the ground plane. 20
7. The miniature antenna of any of the preceding claims, wherein a grid dimension value of the grid dimension curve is pre-selected to tune the frequency band of the antenna. 25
8. The miniature antenna of any of the preceding claims, **characterized in that** the top-loading portion (2314) preferably lies in a second plane that is perpendicular to the plane of the grid dimension curve. 30
9. The miniature antenna of claim 8, wherein the grid dimension curve includes a first end and a second end, the first end being a feeding point of the antenna and the second end being coupled to the top-loading portion. 35
10. The miniature antenna of any of claims 1 to 9, wherein a distance between the radiating arm (2310) and the second radiating arm (2312) is pre-selected to determine the degree of electromagnetic coupling between the radiating arm and the second radiating arm. 40
11. The miniature antenna of any of claims 1 to 10, wherein the plane of the grid dimension curve and the second plane of the second grid dimension curve are parallel. 45
12. The miniature antenna of any of claims 1 to 11, wherein the grid dimension curve defined by the radiating arm and the second grid dimension curve defined by the second radiating arm lie in the same plane. 50
13. The miniature antenna of any of claims 1 to 12, wherein the first top-loading portion (2314) lies in a third plane and preferably the second top-loading portion (2316) lies in a fourth plane, and wherein preferably the third and fourth planes are perpendicular to the plane of the grid dimension curve, wherein preferably the third plane is parallel with the fourth plane. 55
14. The miniature antenna of any of claims 1 to 13 wherein the first and second top-loading portions (2514, 2516) define grid dimension curves.
15. The miniature antenna of any of claims 1 to 14, further **characterized by**: a common top-loading portion (2716) coupled to the radiating arm and the second radiating arm.
16. The miniature antenna of any of the preceding claims; wherein the radiating arm is one of a plurality of radiating arms (2910-2916), each of the plurality of radiating arms having a planar portion that defines a grid dimension curve and at least one extruded portion extending from the planar portion to define a three-dimensional structure.
17. The miniature antenna of any of the preceding claims, wherein the antenna is a high power radio broadcast antenna, a long distance high-frequency communication antenna, a medium frequency communication antenna, a low-frequency communication antenna, a very low-frequency communication antenna, a very high frequency antenna, an ultra high frequency antenna, a radio or cellular antenna within an automobile, a communication antenna on board a ship, an antenna within a cellular telephone or an antenna within a wireless communication device.
18. Automobile with a radio or cellular antenna given by the miniature antenna of any of claims 1 to 17.
19. Ship with a communication antenna on board which is given by the miniature antenna of any of claims 1 to 17.
20. Cellular phone or wireless device with an antenna given by the miniature antenna of any of claims 1 to 17.

#### Patentansprüche

1. Eine Miniaturantenne (2300), die aufweist, einen abstrahlenden Zweig (2310), der eine Gitterdimensionskurve in einer Ebene der Antenne definiert; wobei der abstrahlende Zweig (2310) einen ebenen Teil aufweist, der die Gitterdimensionskurve defi-

niert;

wobei der abstrahlende Zweig weiterhin wenigstens einen ausgeweiteten Teil (68) aufweist, der von dem ebenen Teil absteht, um eine dreidimensionale Struktur zu definieren;

wobei der abstrahlende Zweig (2310) ein aktiver abstrahlender Zweig ist, der einen Speisepunkt einschließt, um die Antenne an ein Übertragungsmedium zu koppeln;

wobei die Antenne weiterhin einen ersten Teil (2314) für eine Belastung an einem Ende umfasst, der an den abstrahlenden Zweig (2310) gekoppelt ist;

wobei die Antenne physikalische Abmessungen hat, die klein sind relativ zu der Betriebswellenlänge der Antenne,

**dadurch gekennzeichnet, dass**

die Antenne einen zweiten abstrahlenden Zweig (2312) umfasst, der eine zweite Gitterdimensionskurve in einer zweiten Ebene der Antenne definiert; wobei der zweite abstrahlende Zweig (2312) einen ebenen Teil hat, der die zweite Gitterdimensionskurve definiert;

wobei der zweite abstrahlende Zweig (2312) wenigstens einen ausgeweiteten Teil aufweist, der von dem ebenen Teil absteht, um eine dreidimensionale Struktur zu definieren;

wobei der zweite abstrahlende Zweig (2312) ein parasitischer abstrahlender Zweig ist, der an ein Massepotenzial gekoppelt ist; und

der abstrahlende Zweig (2310) ist elektromagnetisch an den zweiten abstrahlenden Zweig (2312) gekoppelt;

wobei ein zweiter Teil (2316) zum Belasten an einem Ende an den zweiten abstrahlenden Zweig (2312) gekoppelt ist;

wobei der erste Teil (2314) zum Belasten an einem Ende elektromagnetisch an den zweiten Teil (2316) zum Belasten an einem Ende gekoppelt ist;

wobei die Gitterdimensionskurve eine raumfüllende Kurve definiert, wobei die raumfüllende Kurve aus einer Linie gebildet ist, die wenigstens zehn Segmente beinhaltet, wobei jedes Segment einen Winkel mit einem benachbarten Segment bildet; und

wobei der erste und zweite Teil (2314, 2316) zum Belasten an einem Ende ebene Leiter beinhalten, die parallel ausgerichtet sind und mit einem vorbestimmten Abstand in der Richtung senkrecht zu der Ebene der Teile zum Belasten an einem Ende beabstandet sind.

2. Die Miniaturantenne nach Anspruch 1, wobei die Gitterdimensionskurve eine rechteckige Peripherie definiert und/oder eine Leiterlänge aufweist, wobei die Leiterlänge der Gitterdimensionskurve vorausgewählt ist, um das Frequenzband der Antenne einzustellen.

3. Miniaturantenne nach irgendeinem der Ansprüche 1 oder 2, wobei der Speisepunkt auf dem ebenen Teil des abstrahlenden Zweigs angeordnet ist, oder der Speisepunkt an dem ausgeweiteten Teil (68) des abstrahlenden Zweigs angeordnet ist.

4. Die Miniaturantenne nach irgendeinem der vorangehenden Ansprüche, wobei der ebene Teil des abstrahlenden Zweigs (2310) in einer Richtung ausgeweitet ist, die senkrecht zu der Ebene der Gitterdimensionskurve liegt, um den ausgeweiteten Teil des abstrahlenden Zweigs (3210) zu bilden und wobei der ausgeweitete Teil eine dreidimensionale Wiedergabe der Gitterdimensionskurve bildet.

5. Die Miniaturantenne nach Anspruch 4, wobei die Miniaturantenne durch einen vorbestimmten Abstand von einer Massenebene beabstandet ist.

6. Die Miniaturantenne nach Anspruch 5, wobei der ebene Teil des abstrahlenden Zweigs (2310) senkrecht zu der Massenebene ist oder die Ebene der Gitterdimensionskurve einen Winkel ( $\theta$ ) mit der Massenebene bildet.

7. Die Miniaturantenne nach irgendeinem der vorangehenden Ansprüche, wobei ein Gitterdimensionswert der Gitterdimensionskurve vorausgewählt ist, um das Frequenzband der Antenne einzustellen.

8. Die Miniaturantenne nach irgendeinem der vorangehenden Ansprüche, **dadurch gekennzeichnet, dass** der Teil (2314) zum Belasten an einem Ende vorzugsweise in einer zweiten Ebene liegt, die senkrecht zu der Ebene der Gitterdimensionskurve ist.

9. Die Miniaturantenne nach Anspruch 8, wobei die Gitterdimensionskurve ein erstes und ein zweites Ende beinhaltet, wobei das erste Ende ein Speisepunkt der Antenne ist und das zweite Ende an den Teil zum Belasten an einem Ende gekoppelt ist.

10. Die Miniaturantenne nach irgendeinem der Ansprüche 1 bis 9, wobei der Abstand zwischen dem abstrahlenden Zweig (2310) und dem zweiten abstrahlenden Zweig (2312) vorbestimmt ist, um das Maß der elektromagnetischen Kopplung zwischen dem abstrahlenden Zweig und dem zweiten abstrahlenden Zweig festzulegen.

11. Die Miniaturantenne nach irgendeinem der Ansprüche 1 bis 10, wobei die Ebene der Gitterdimensionskurve und die zweite Ebene der zweiten Gitterdimensionskurve parallel sind.

12. Die Miniaturantenne nach irgendeinem der Ansprüche 1 bis 11, wobei die Gitterdimensionskurve, die durch den abstrahlenden Zweig definiert ist, und die

zweite Gitterdimensionskurve, die durch den zweiten abstrahlenden Zweig definiert wird, in der gleichen Ebene liegen.

13. Die Miniaturantenne nach irgendeinem der Ansprüche 1 bis 12, wobei der erste Teil (2314) zum Belasten an einem Ende in einer dritten Ebene liegt und vorzugsweise der zweite Teil (2316) zum Belasten an einem Ende in einer vierten Ebene liegt und wobei vorzugsweise die dritte und die vierte Ebene senkrecht zu der Ebene der Gitterdimensionskurve liegen, wobei vorzugsweise die dritte Ebene parallel zu der vierten Ebene ist. 5
14. Die Miniaturantenne nach irgendeinem der Ansprüche 1 bis 13, wobei der erste und zweite Teil (2513, 2516) zum Belasten an einem Ende Gitterdimensionskurven definieren. 10
15. Die Miniaturantenne nach irgendeinem der Ansprüche 1 bis 14, weiter gezeichnet durch: einen gemeinsamen Teil (2716) zum Belasten an einem Ende, der an den abstrahlenden Zweig und den zweiten abstrahlenden Zweig gekoppelt ist. 15
16. Die Miniaturantenne nach irgendeinem der vorangehenden Ansprüche, wobei der abstrahlende Zweig einer einer Mehrzahl von abstrahlenden Zweigen (2910 - 2916) ist, wobei jeder der Mehrzahl der abstrahlenden Zweige einen ebenen Teil hat, der eine Gitterdimensionskurve definiert und wenigstens einen ausgeweiteten Teil, der von dem ebenen Teil absteht, um eine dreidimensionale Struktur zu bilden. 20
17. Die Miniaturantenne nach irgendeinem der vorangehenden Ansprüche, wobei die Antenne eine Hochleistungsrundfunkausstrahlungsantenne ist, eine langreichweitige Hochfrequenzkommunikationsantenne, eine Mittelfrequenzkommunikationsantenne, eine Niedrigfrequenzkommunikationsantenne, eine Sehr-Niedrig-Frequenzkommunikationsantenne, eine Ultrakurzwellenantenne, eine Ultrahochfrequenzantenne, eine Rundfunk- oder Mobilfunkantenne in einem Fahrzeug, eine Kommunikationsantenne an Bord eines Schiffes, eine Antenne in einem Mobiltelefon oder eine Antenne in einem drahtlosen Kommunikationsgerät ist. 25
18. Fahrzeug mit einer Rundfunk- oder Mobilfunkantenne, die gegeben ist durch eine Miniaturantenne nach irgendeinem der Ansprüche 1 bis 17. 30
19. Schiff mit einer Kommunikationsantenne an Bord, die gegeben ist durch eine Miniaturantenne nach irgendeinem der Ansprüche 1 bis 17. 35
20. Mobilfunktelefon oder drahtloses Gerät mit einer An- 40

tenne, die gegeben ist durch eine Miniaturantenne nach irgendeinem der Ansprüche 1 bis 17.

## Revendications

1. Antenne miniature (2300) comportant un bras rayonnant (2310) qui définit une courbe à dimension de grille à l'intérieur d'un plan de l'antenne; le bras rayonnant (2310) comportant une partie plane qui définit la courbe à dimension de grille; le bras rayonnant comportant également au moins une partie extrudée (68) qui s'étend à partir de la partie plane pour définir une structure en trois dimensions; le bras rayonnant (2310) étant un bras rayonnant actif qui comprend un point d'alimentation pour relier l'antenne à un support de transmission; l'antenne comportant aussi une première partie de charge supérieure (2314) reliée au bras rayonnant (2310); l'antenne ayant des dimensions physiques faibles par rapport à sa longueur d'onde opérationnelle, **caractérisée en ce que** l'antenne comprend un second bras rayonnant (2312) qui définit une seconde courbe à dimension de grille à l'intérieur d'un second plan de l'antenne; le second bras rayonnant (2312) comportant une partie plane qui définit la seconde courbe à dimension de grille; le second bras rayonnant (2312) comportant au moins une partie extrudée qui s'étend à partir de la partie plane pour définir une structure en trois dimensions; le second bras rayonnant (2312) est un bras rayonnant parasite qui est relié à un potentiel de masse; et le bras rayonnant (2310) est couplé électromagnétiquement au second bras rayonnant (2312); une seconde partie de charge supérieure (2316) étant reliée au second bras rayonnant (2312); la première partie de charge supérieure (2314) étant couplée électromagnétiquement à la seconde partie de charge supérieure (2316); la courbe à dimension de grille définissant une courbe de remplissage de l'espace, courbe de remplissage de l'espace qui est formée à partir d'une ligne comprenant au moins dix segments dont chacun forme un angle avec un segment adjacent; et les première et seconde parties de charge supérieures (2314, 2316) comprennent des conducteurs plans qui sont alignés de manière parallèle et qui sont séparés d'une distance prédéfinie dans la direction perpendiculaire au plan des parties de charge supérieures. 45
2. Antenne miniature selon la revendication 1, dans laquelle la courbe à dimension de grille définit une pé- 50

- riphérie rectangulaire et/ou possède une longueur de conducteur, et dans laquelle la longueur de conducteur de la courbe à dimension de grille est présélectionnée pour régler la bande de fréquences d'accord de l'antenne.
3. Antenne miniature selon la revendication 1 ou 2, dans laquelle le point d'alimentation est situé sur la partie plane du bras rayonnant ou sur la partie extrudée (68) du bras rayonnant.
  4. Antenne miniature selon l'une quelconque des revendications précédentes, dans laquelle la partie plane du bras rayonnant (2310) est extrudée dans une direction perpendiculaire au plan de la courbe à dimension de grille pour former la partie extrudée du bras rayonnant (3210), et dans laquelle la partie extrudée forme une représentation en trois dimensions de la courbe à dimension de grille.
  5. Antenne miniature selon la revendication 4, dans laquelle l'antenne miniature est séparée d'une distance prédéfinie d'un plan de masse.
  6. Antenne miniature selon la revendication 5, dans laquelle la partie plane du bras rayonnant (2310) est perpendiculaire au plan de masse ou le plan de la courbe à dimension de grille forme un angle ( $\theta$ ) avec le plan de masse.
  7. Antenne miniature selon l'une quelconque des revendications précédentes, dans laquelle une valeur de dimension de grille de la courbe à dimension de grille est présélectionnée pour régler la bande de fréquences d'accord de l'antenne.
  8. Antenne miniature selon l'une quelconque des revendications précédentes, **caractérisée en ce que** la partie de charge supérieure (2314) s'étend de préférence dans un second plan qui est perpendiculaire au plan de la courbe à dimension de grille.
  9. Antenne miniature selon la revendication 8, dans laquelle la courbe à dimension de grille comprend une première extrémité et une seconde extrémité, la première extrémité étant un point d'alimentation de l'antenne et la seconde extrémité étant reliée à la partie de charge supérieure.
  10. Antenne miniature selon l'une quelconque des revendications 1 à 9, dans laquelle une distance entre le bras rayonnant (2310) et le second bras rayonnant (2312) est présélectionnée pour déterminer le degré de couplage électromagnétique entre le bras rayonnant et le second bras rayonnant.
  11. Antenne miniature selon l'une quelconque des revendications 1 à 10, dans laquelle le plan de la courbe à dimension de grille et le second plan de la seconde courbe à dimension de grille sont parallèles.
  12. Antenne miniature selon l'une quelconque des revendications 1 à 11, dans laquelle la courbe à dimension de grille définie par le bras rayonnant, et la seconde courbe à dimension de grille définie par le second bras rayonnant s'étendent dans le même plan.
  13. Antenne miniature selon l'une quelconque des revendications 1 à 12, dans laquelle la première partie de charge supérieure (2314) s'étend dans un troisième plan, et la seconde partie de charge supérieure (2316) s'étend de préférence dans un quatrième plan, et dans laquelle les troisième et quatrième plans sont de préférence perpendiculaires au plan de la courbe à dimension de grille, le troisième plan étant de préférence parallèle au quatrième plan.
  14. Antenne miniature selon l'une quelconque des revendications 1 à 13, dans laquelle les première et seconde parties de charge supérieures (2514, 2516) définissent des courbes à dimension de grille.
  15. Antenne miniature selon l'une quelconque des revendications 1 à 14, également **caractérisée par** une partie de charge supérieure commune (2716) reliée au bras rayonnant et au second bras rayonnant.
  16. Antenne miniature selon l'une quelconque des revendications précédentes, dans laquelle le bras rayonnant est l'un de multiples bras rayonnants (2910-2916), chacun des multiples bras rayonnants comportant une partie plane qui définit une courbe à dimension de grille, et au moins une partie extrudée qui s'étend à partir de la partie plane pour définir une structure en trois dimensions.
  17. Antenne miniature selon l'une quelconque des revendications précédentes, dans laquelle l'antenne est une antenne de radiodiffusion de grande puissance, une antenne de communication haute fréquence à grande distance, une antenne de communication moyenne fréquence, une antenne de communication basse fréquence, une antenne de communication très basse fréquence, une antenne très haute fréquence, une antenne ultra haute fréquence, une antenne radio ou cellulaire située à l'intérieur d'une automobile, une antenne de communication à bord d'un navire, une antenne placée à l'intérieur d'un téléphone cellulaire ou une antenne placée à l'intérieur d'un dispositif de communication sans fil.
  18. Automobile équipée d'une antenne radio ou cellulaire formée par l'antenne miniature selon l'une quelconque des revendications 1 à 17.



19. Navire équipé d'une antenne de communication de bord formée par l'antenne miniature selon l'une quelconque des revendications 1 à 17.

20. Téléphone cellulaire ou dispositif sans fil équipé d'une antenne formée par l'antenne miniature selon l'une quelconque des revendications 1 à 17.

10

15

20

25

30


35

40


45

50


55

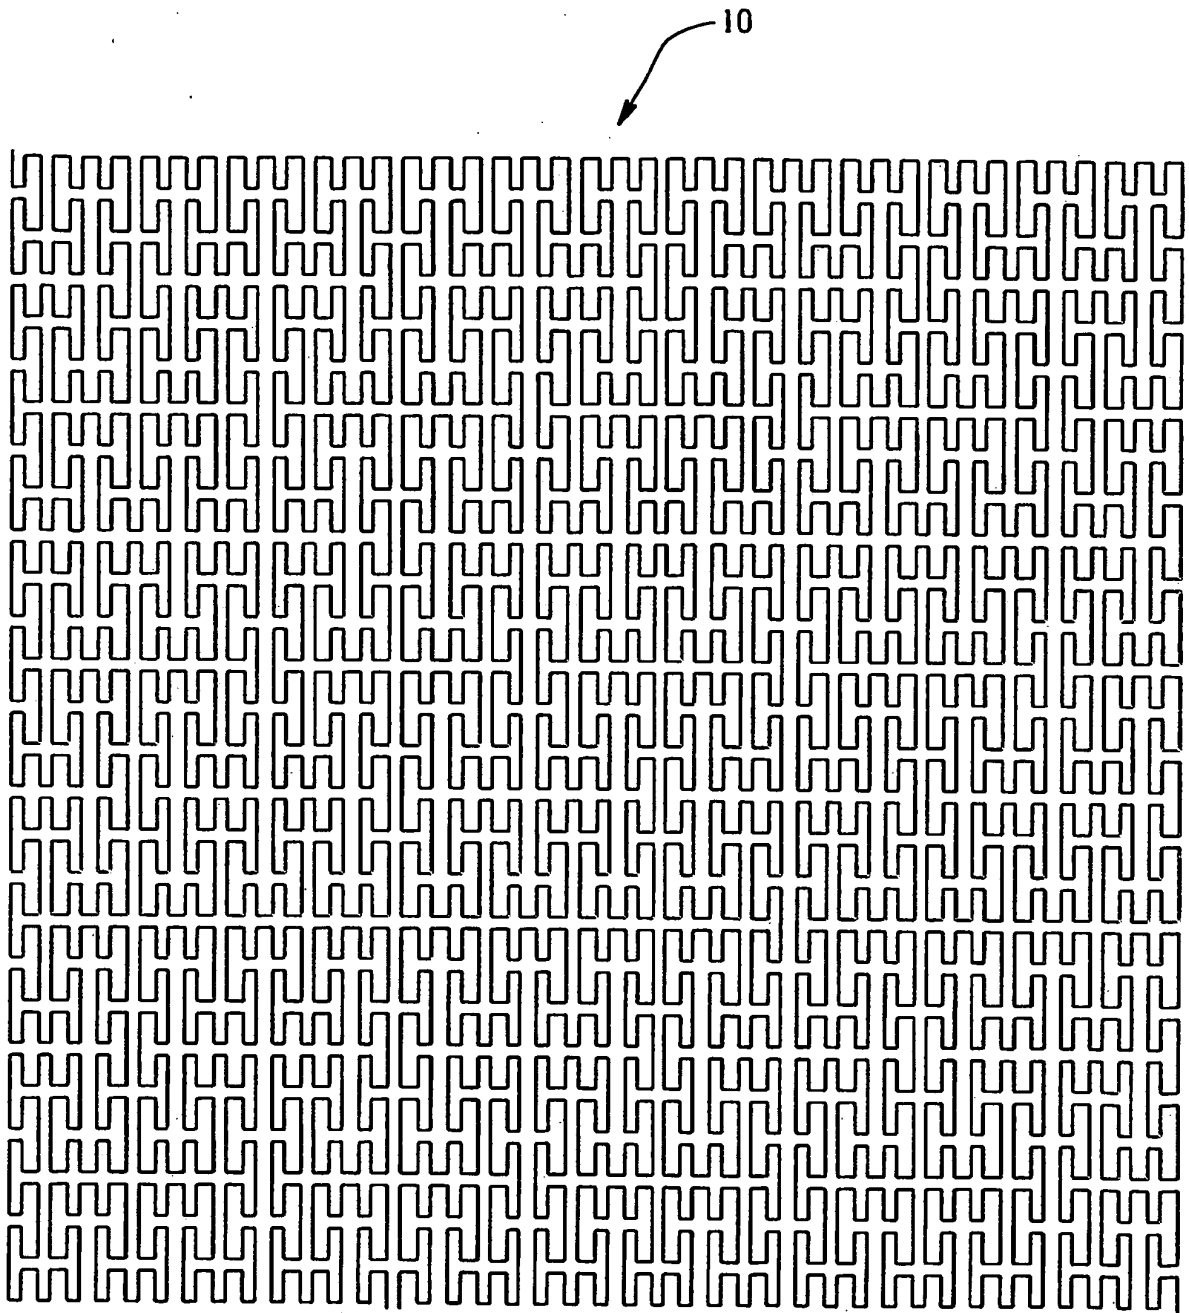


*Fig. 1*  
PRIOR ART

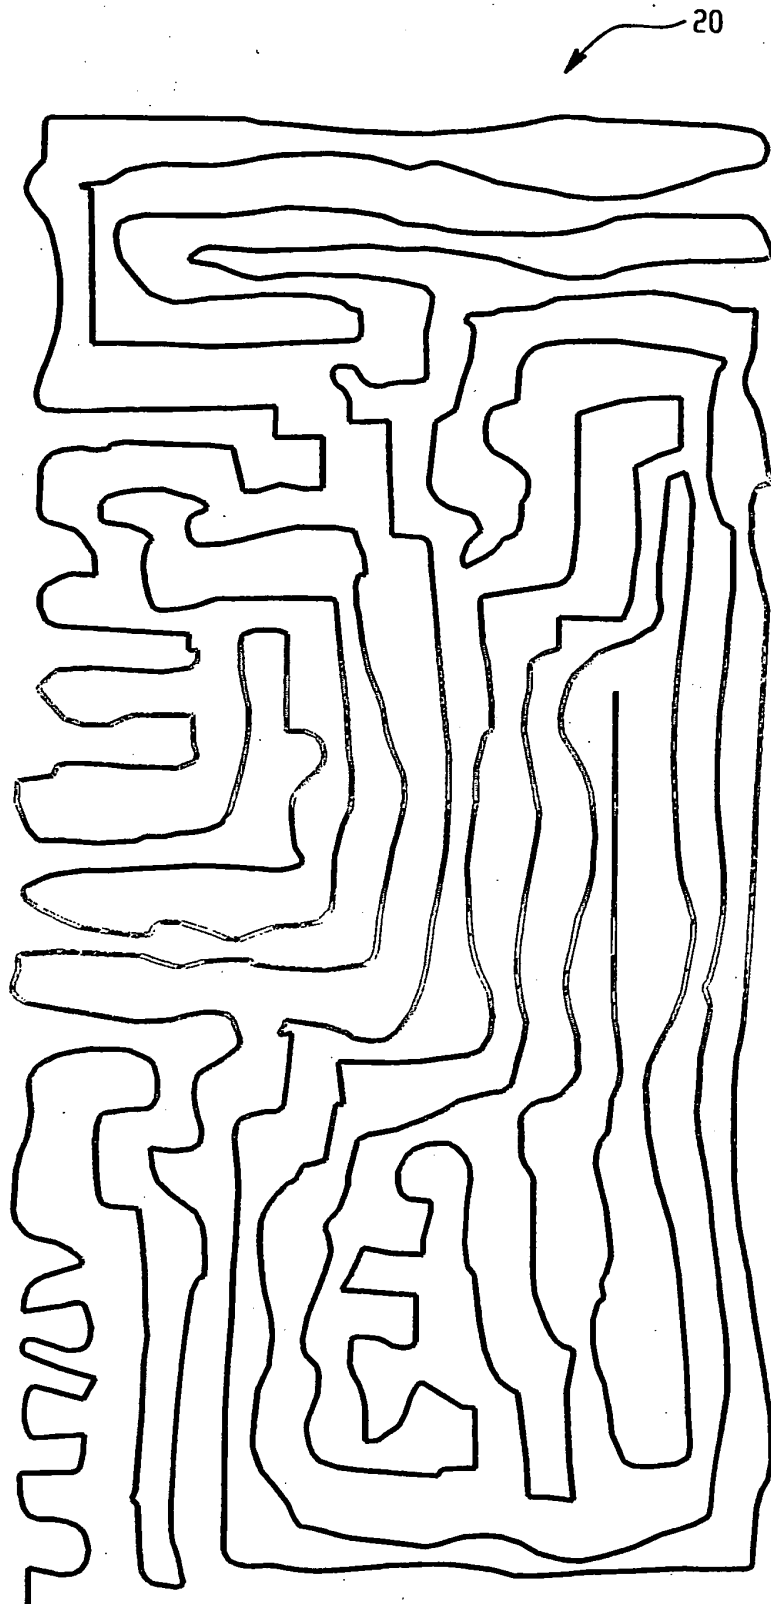

*Fig. 2*

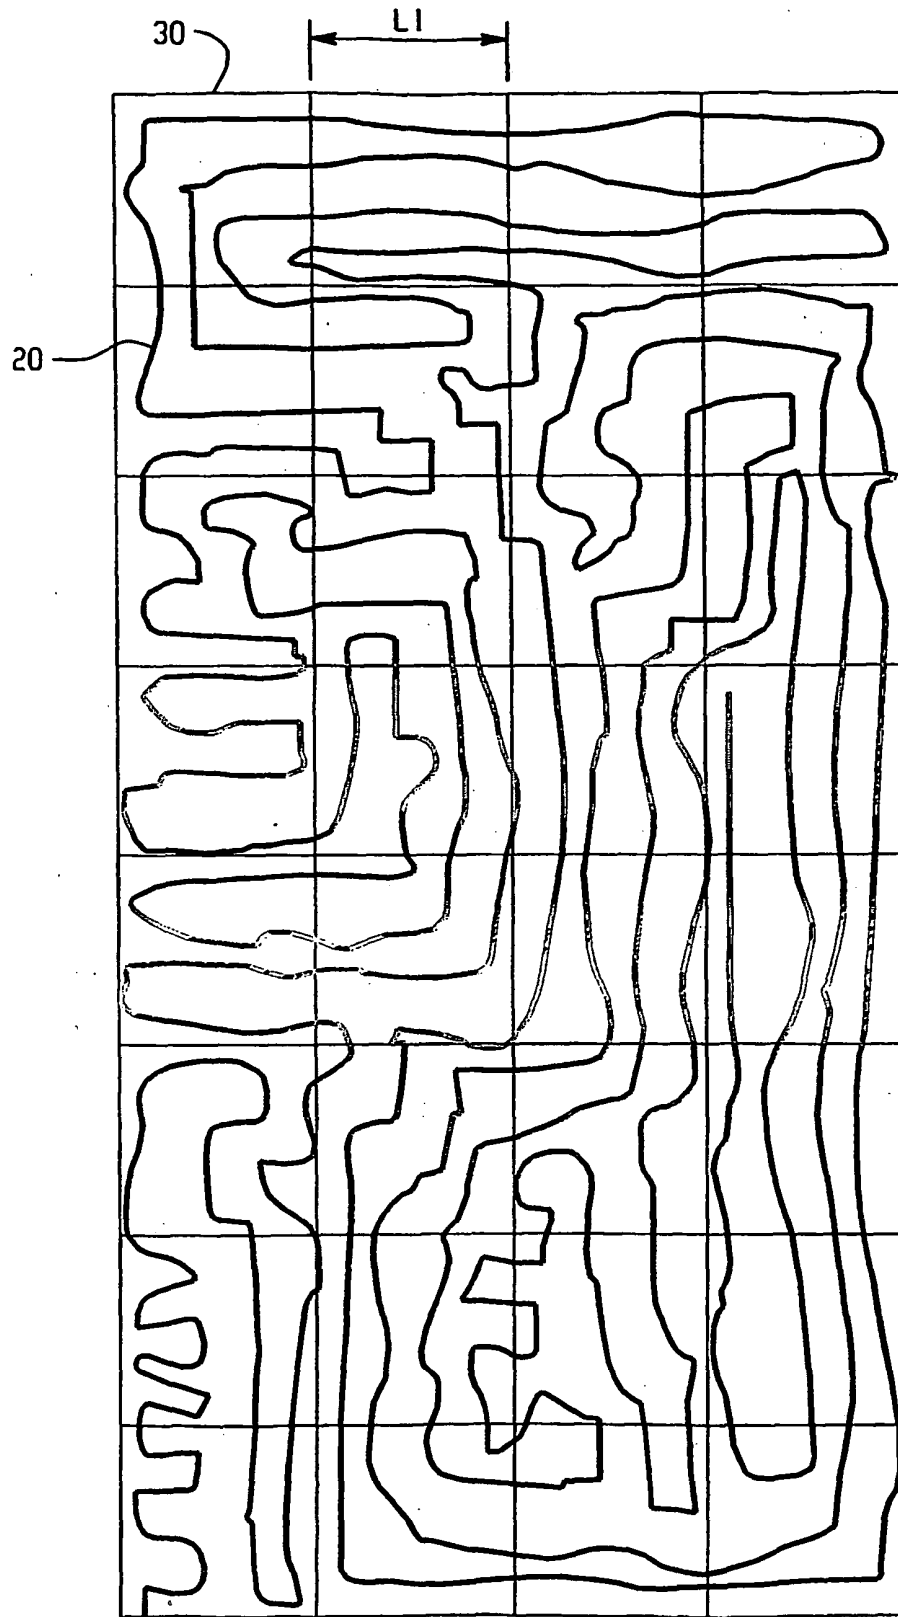

*Fig. 3*

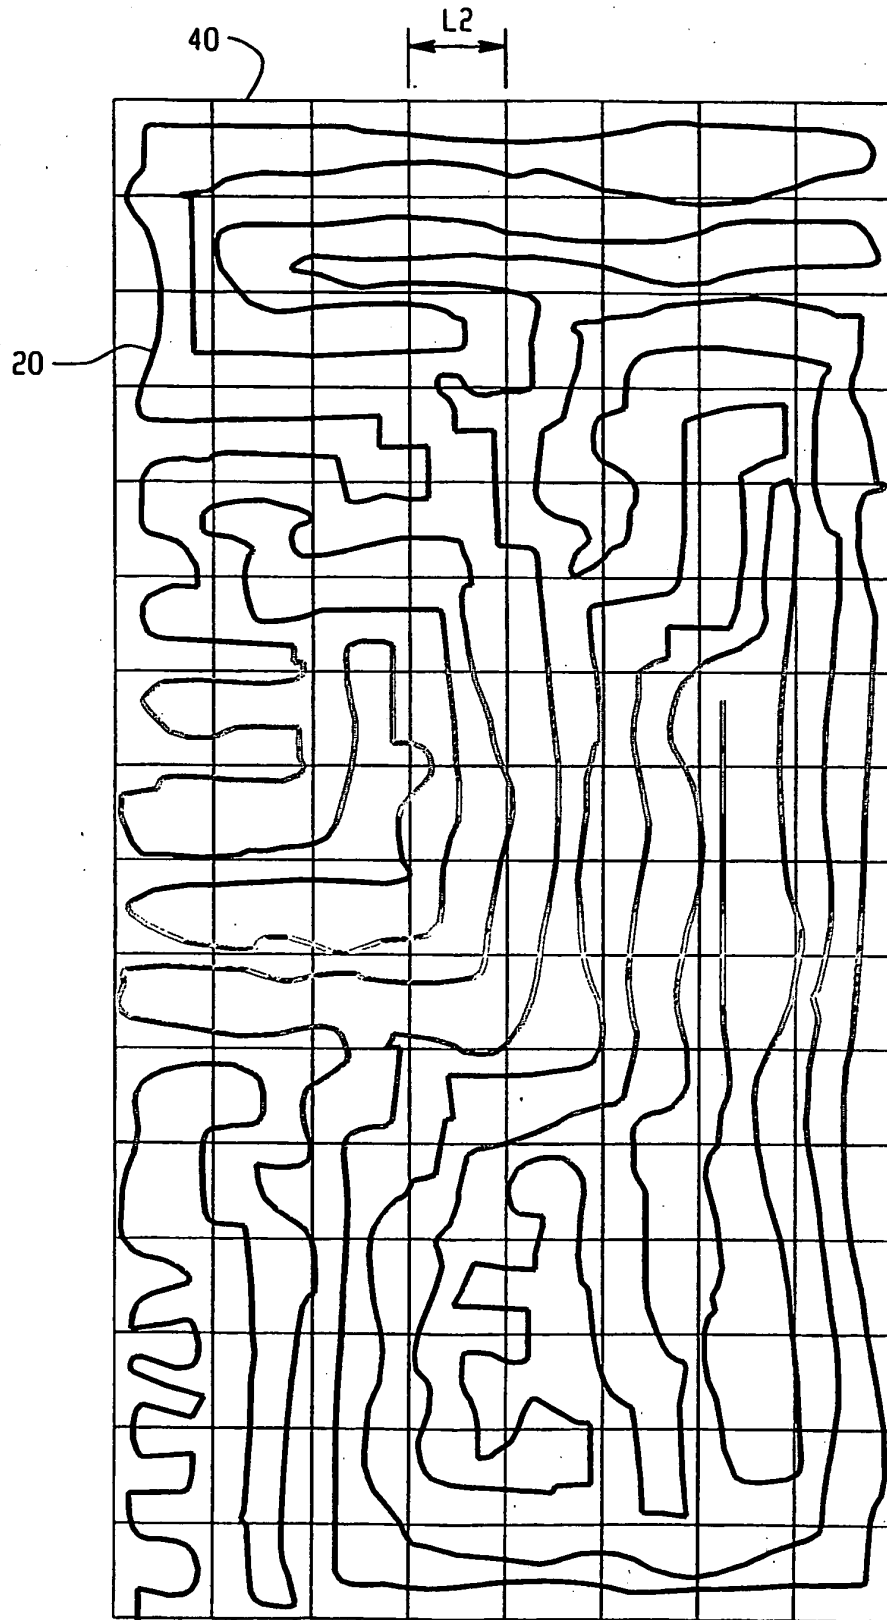

*Fig. 4*

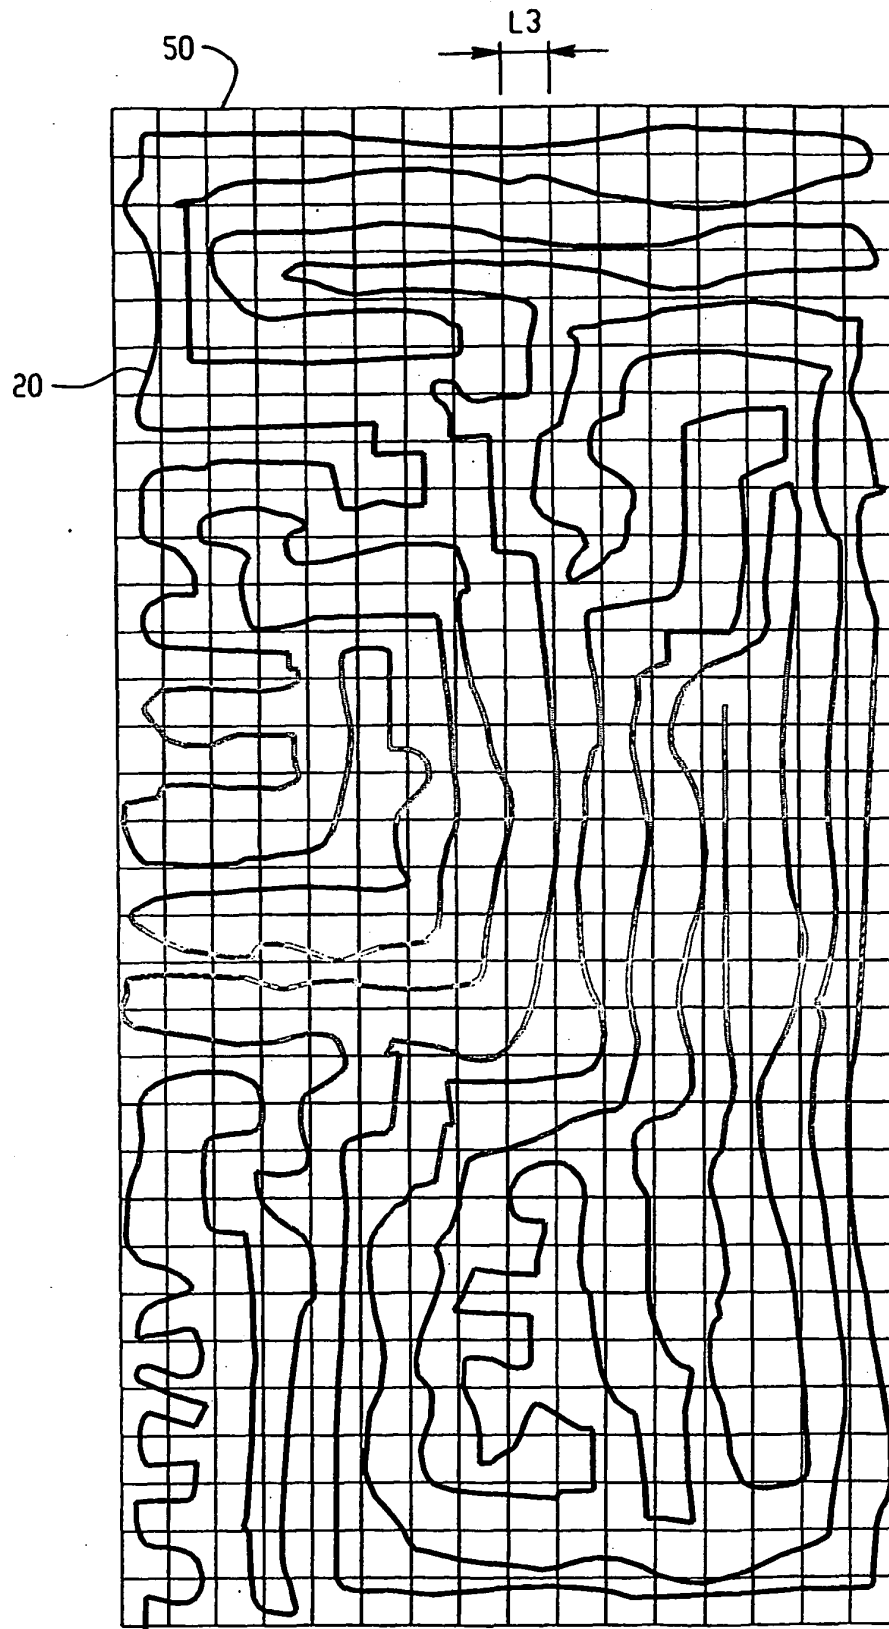


Fig. 5

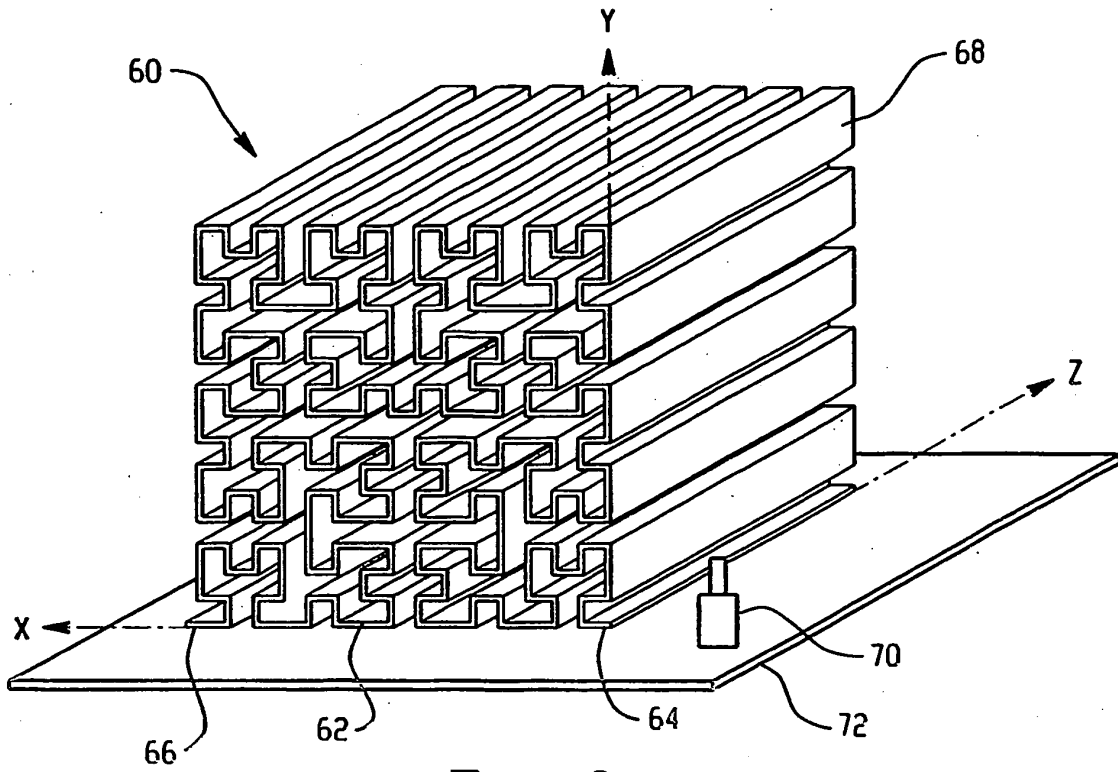


Fig. 6




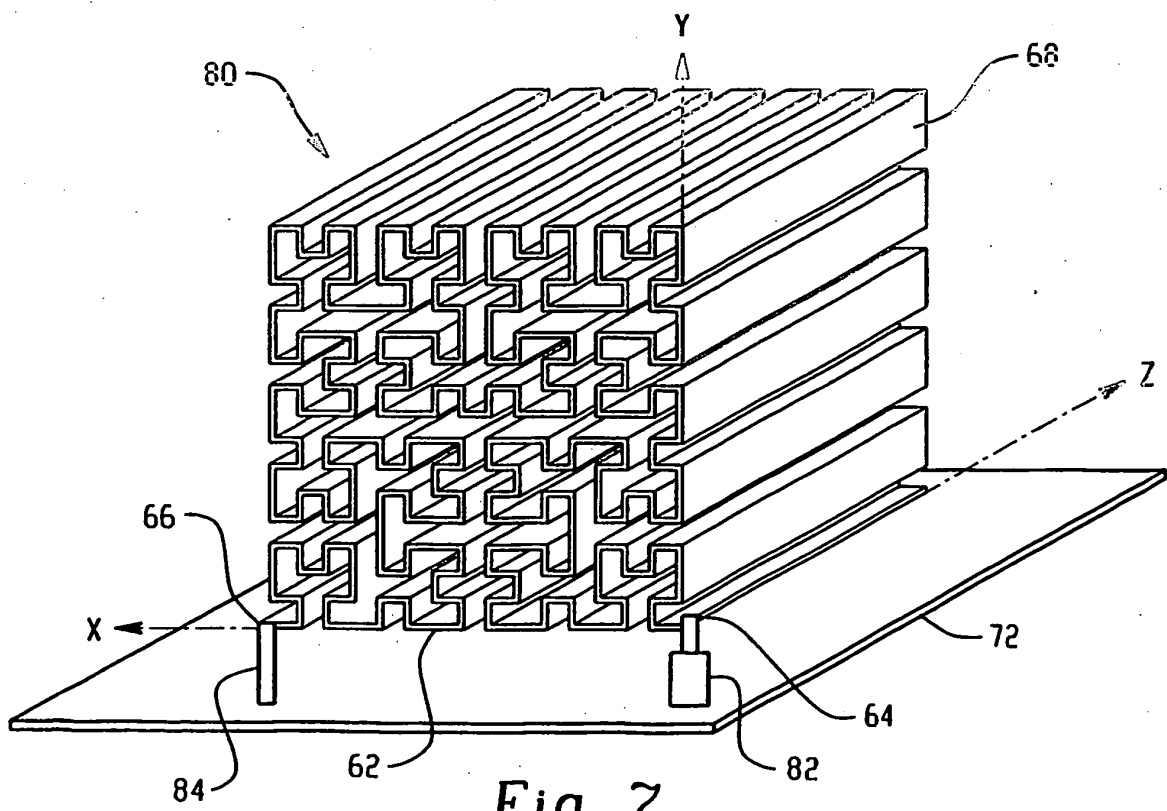


Fig. 7

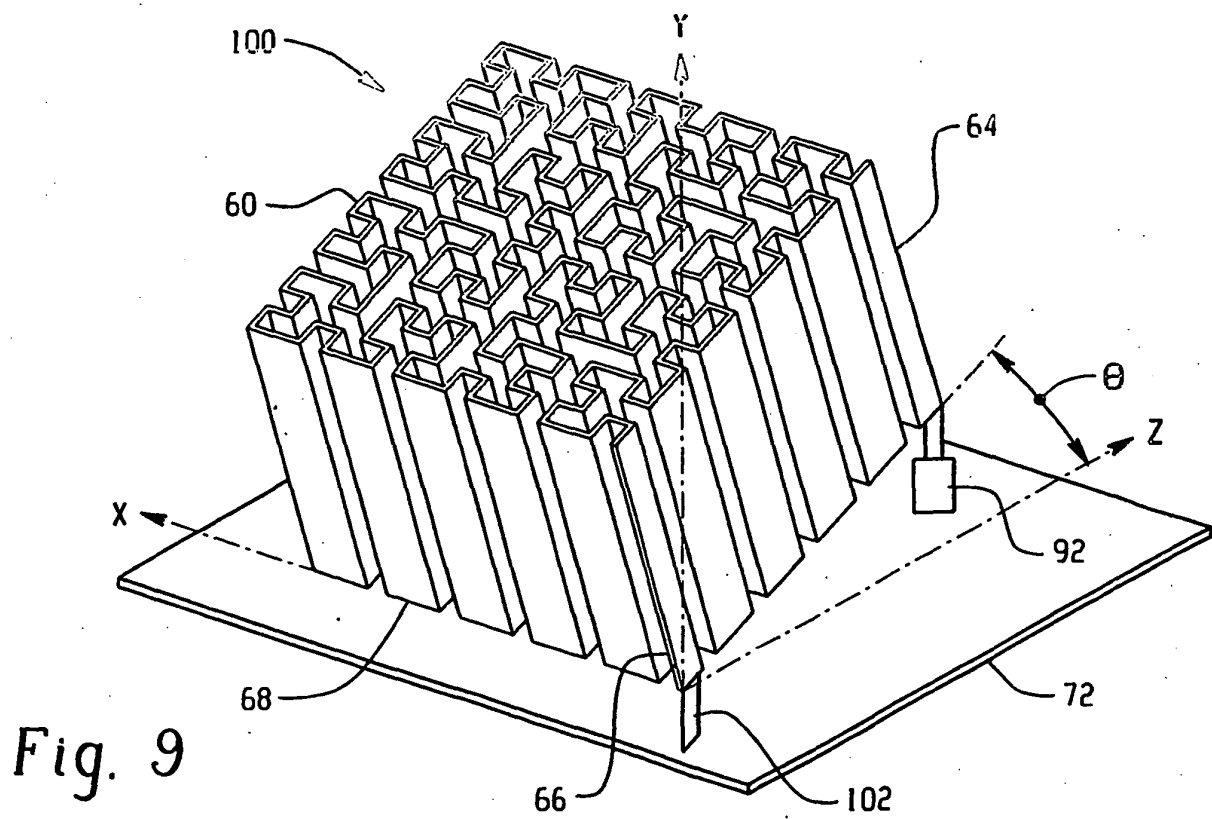

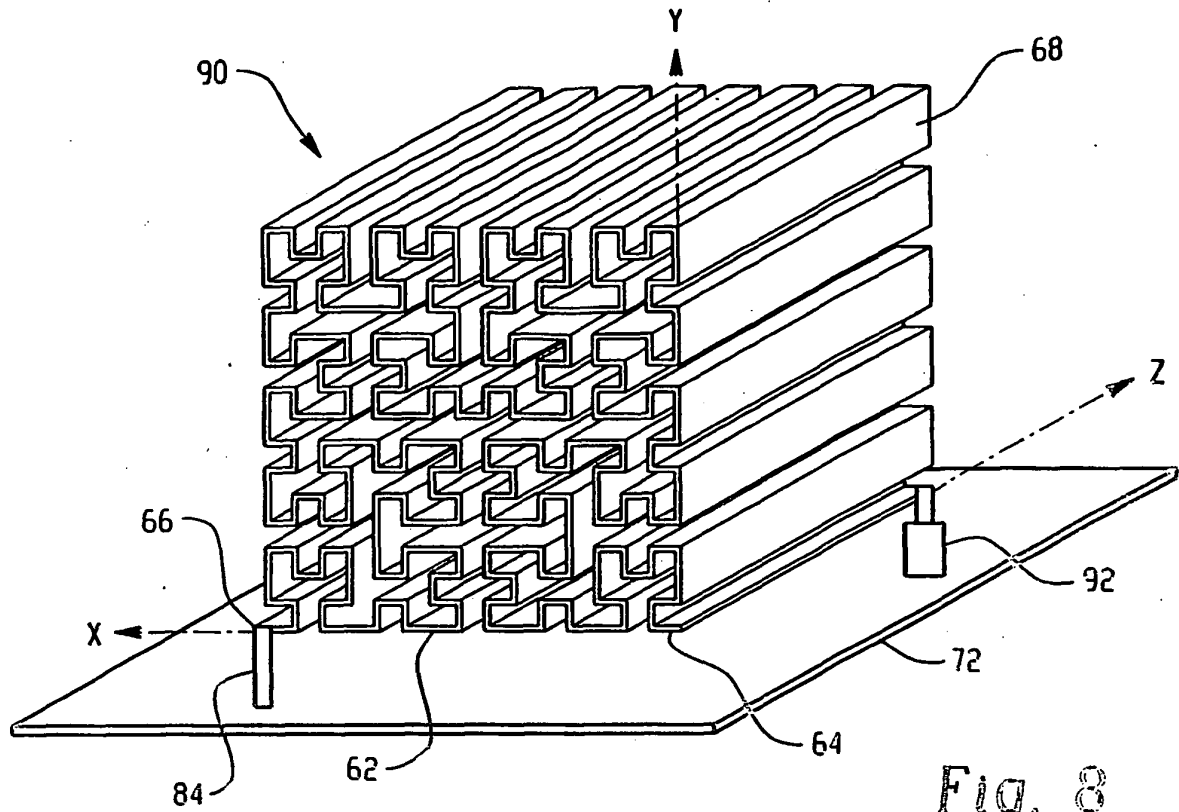

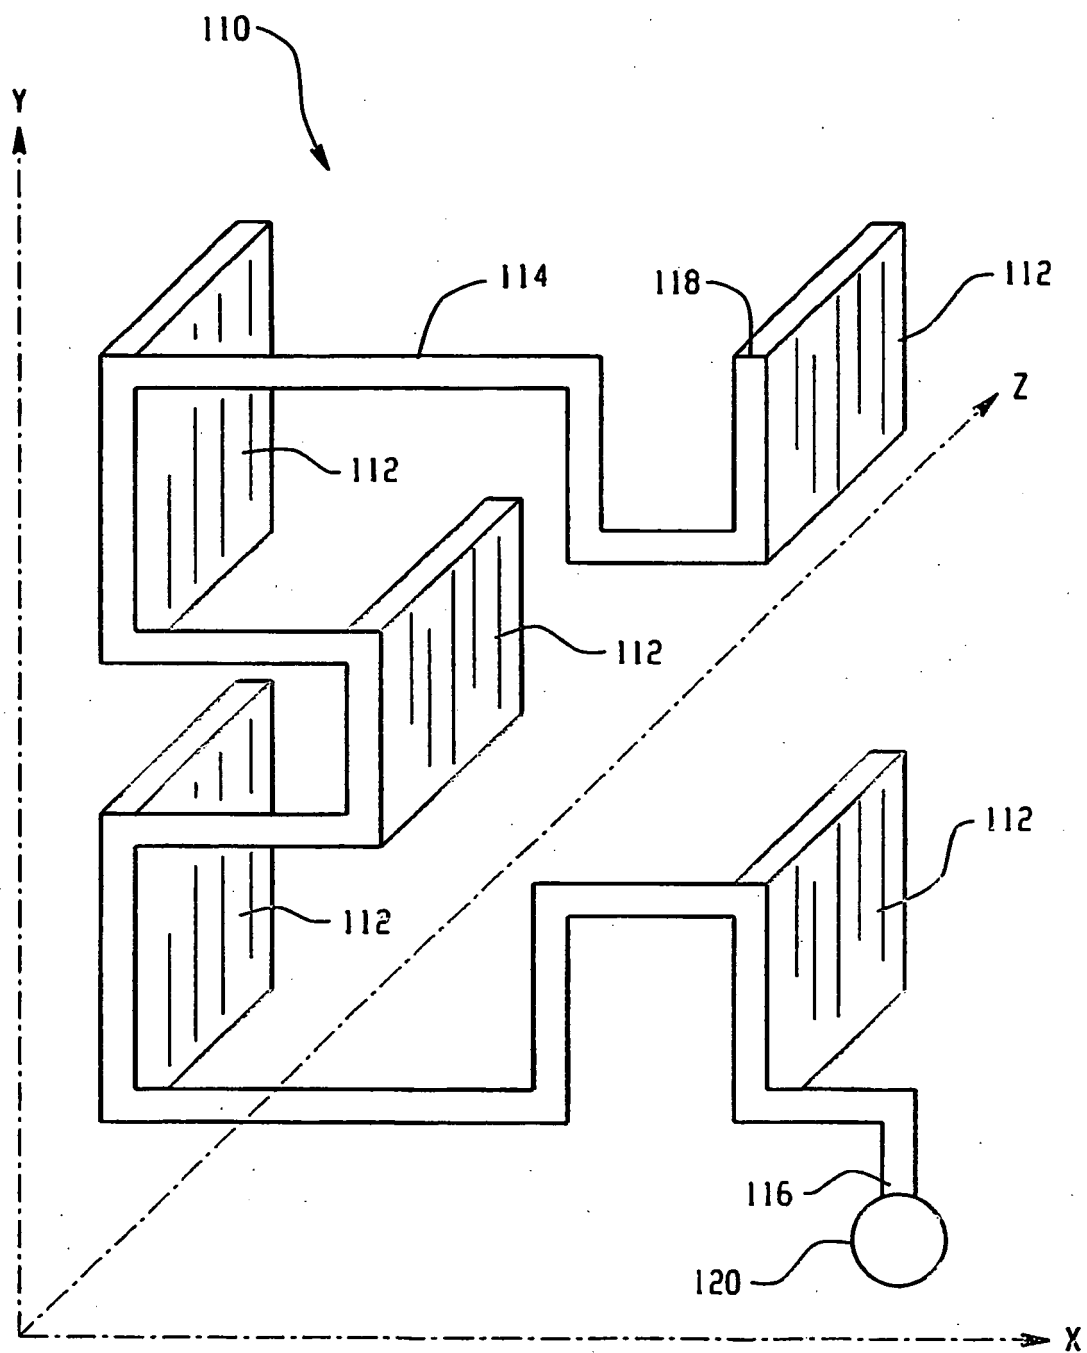

*Fig. 10*

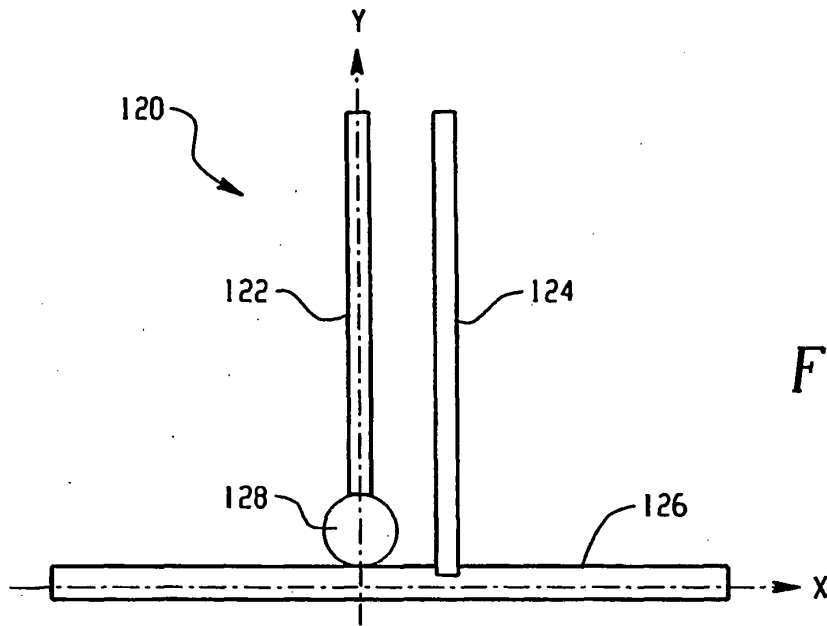


Fig. 11A

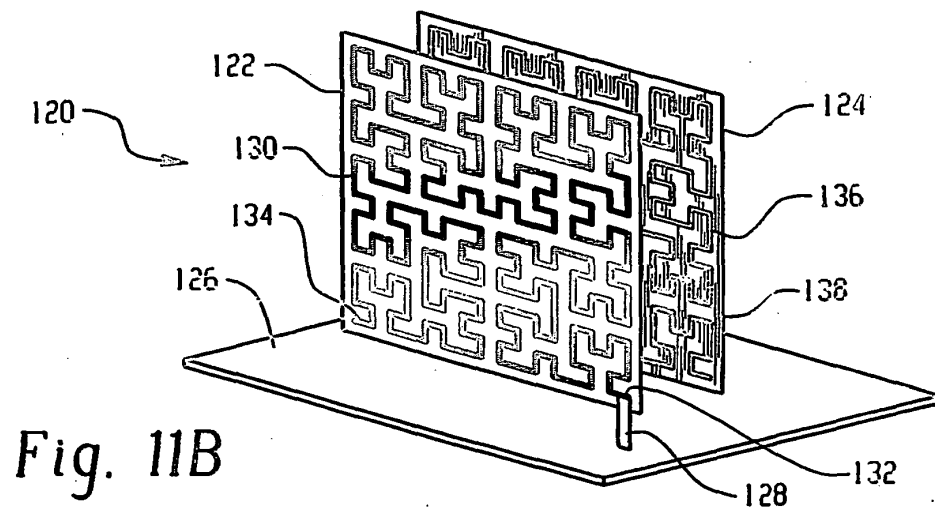


Fig. 11B

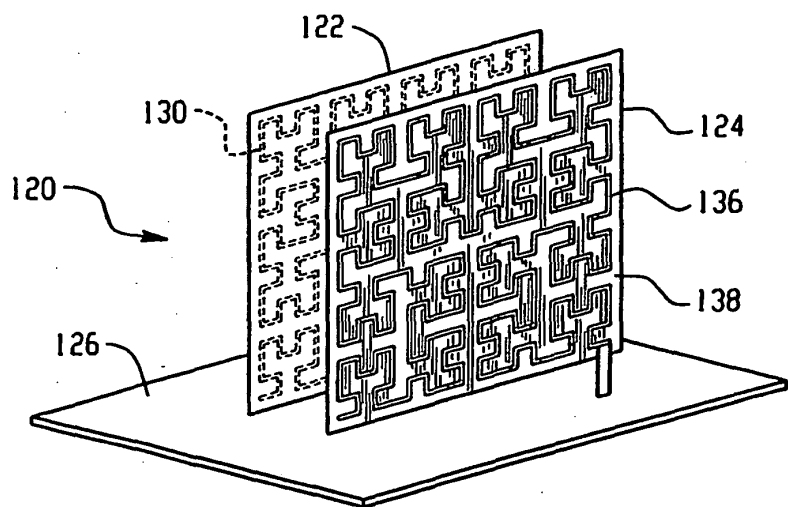


Fig. 11C

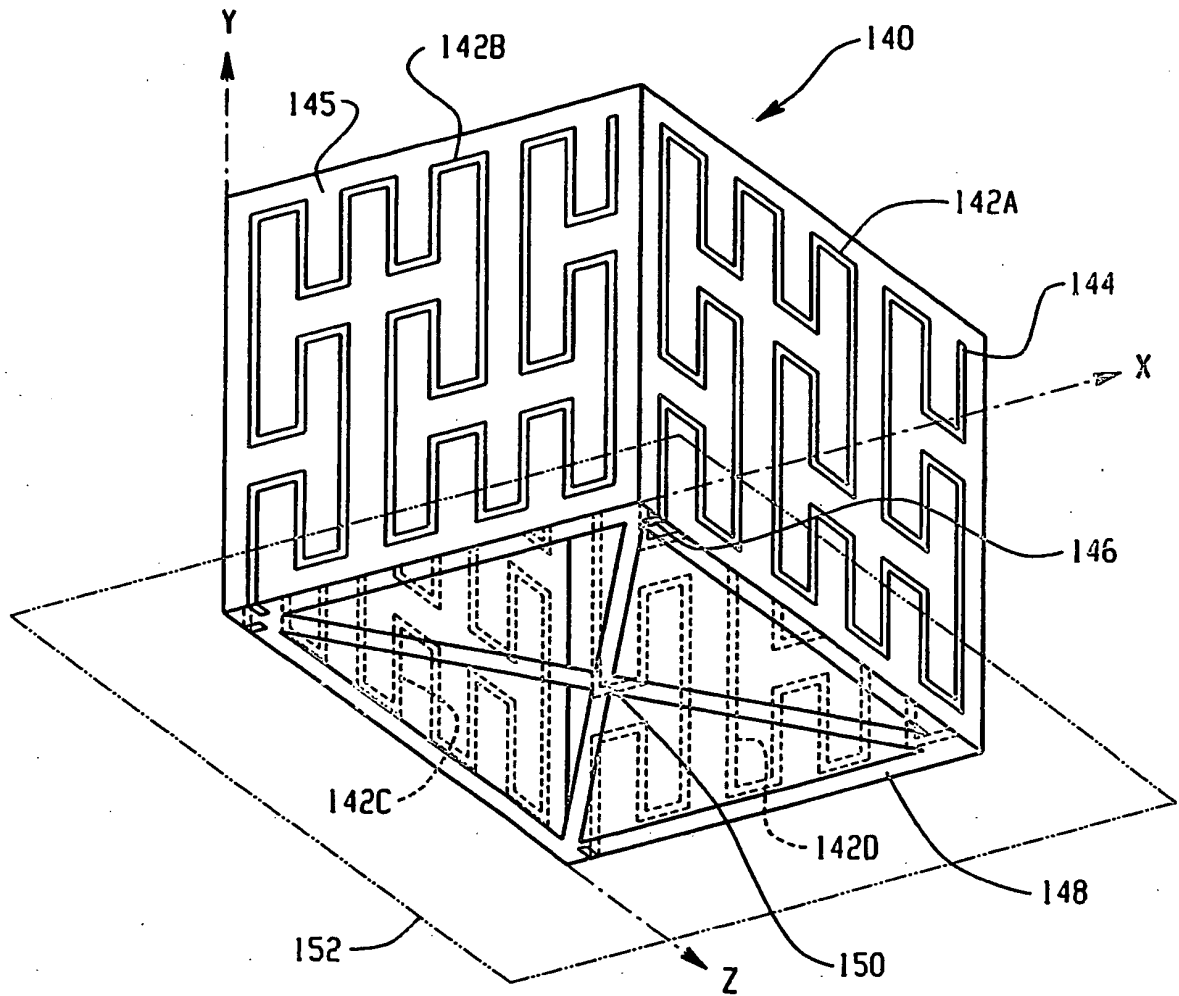


Fig. 12

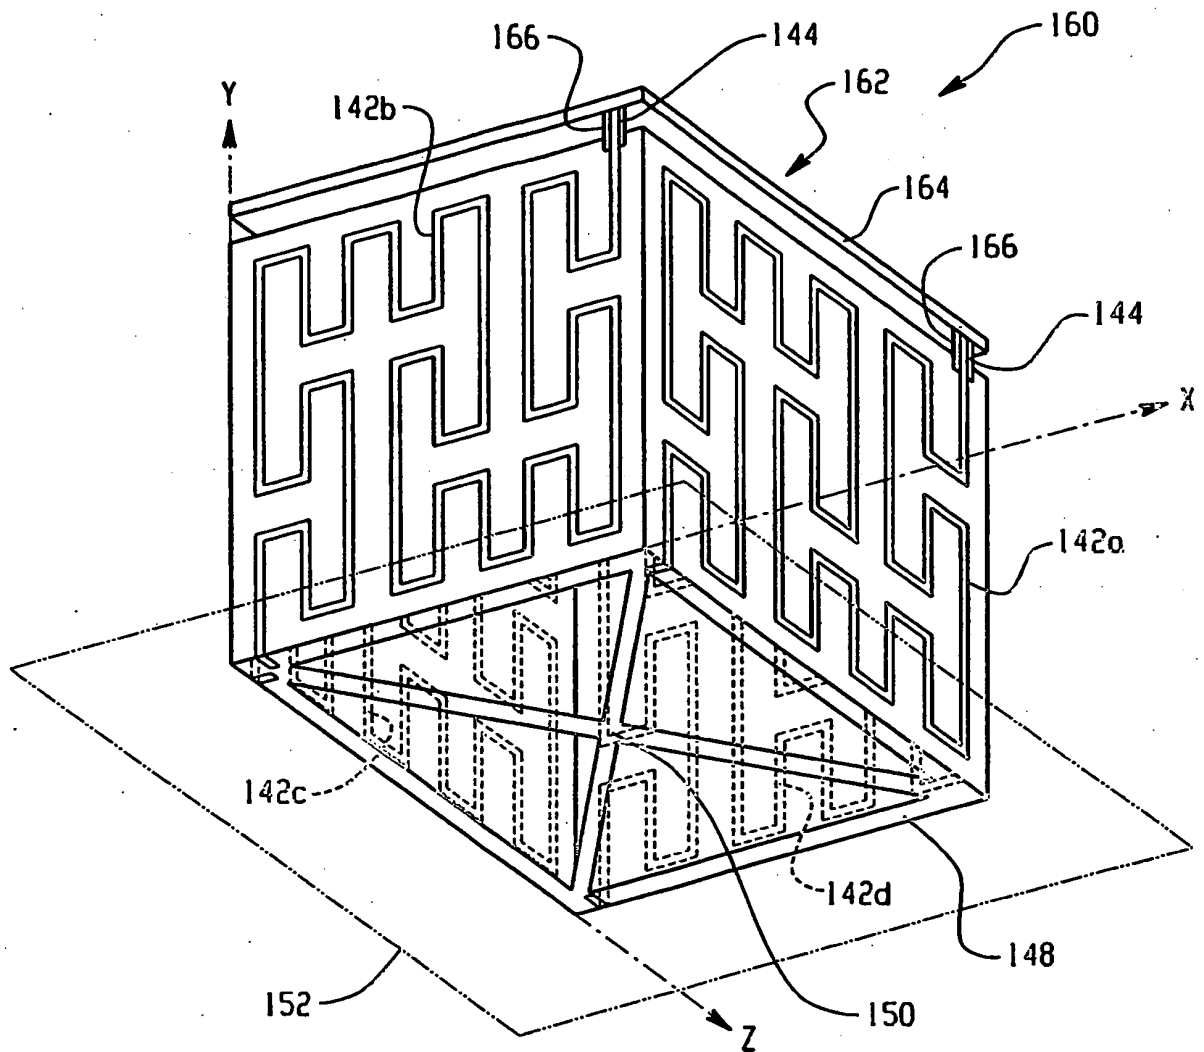
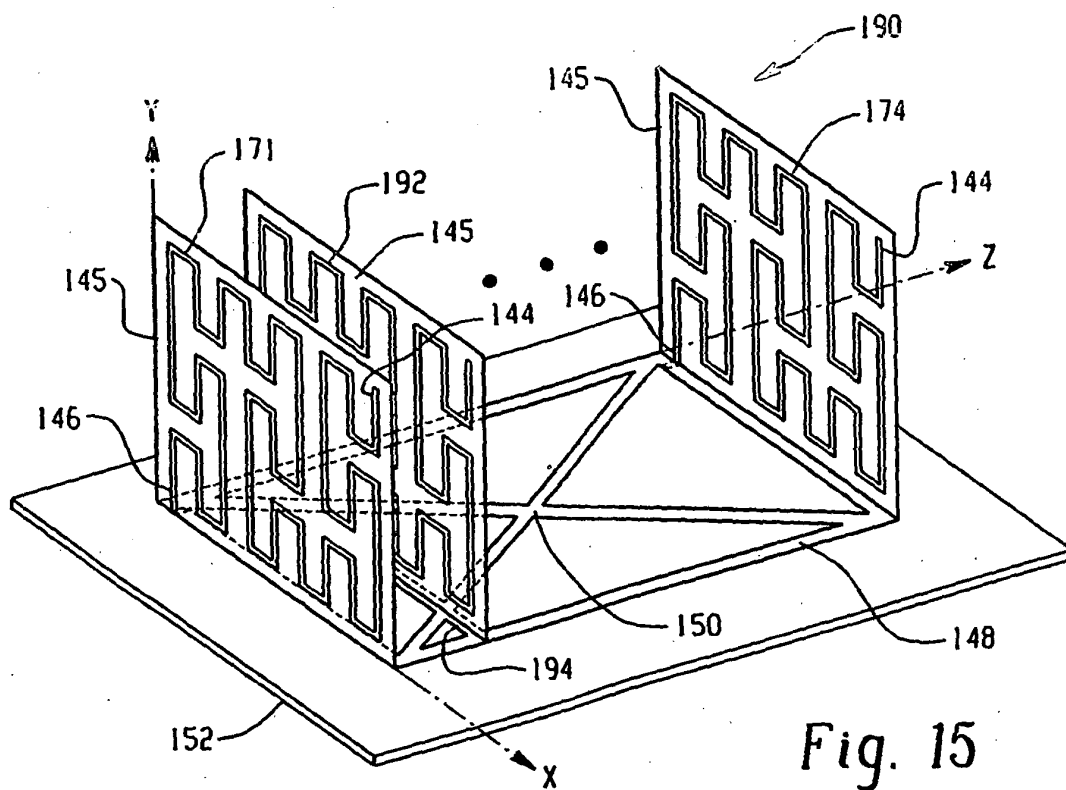
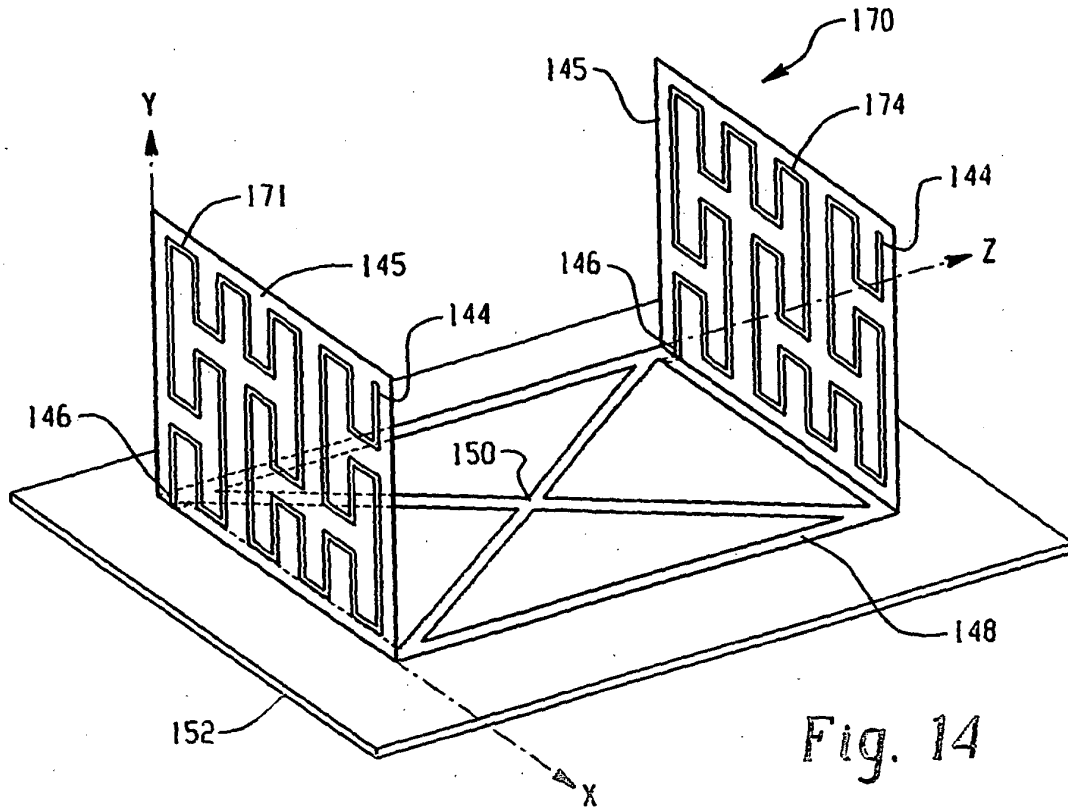


Fig. 13









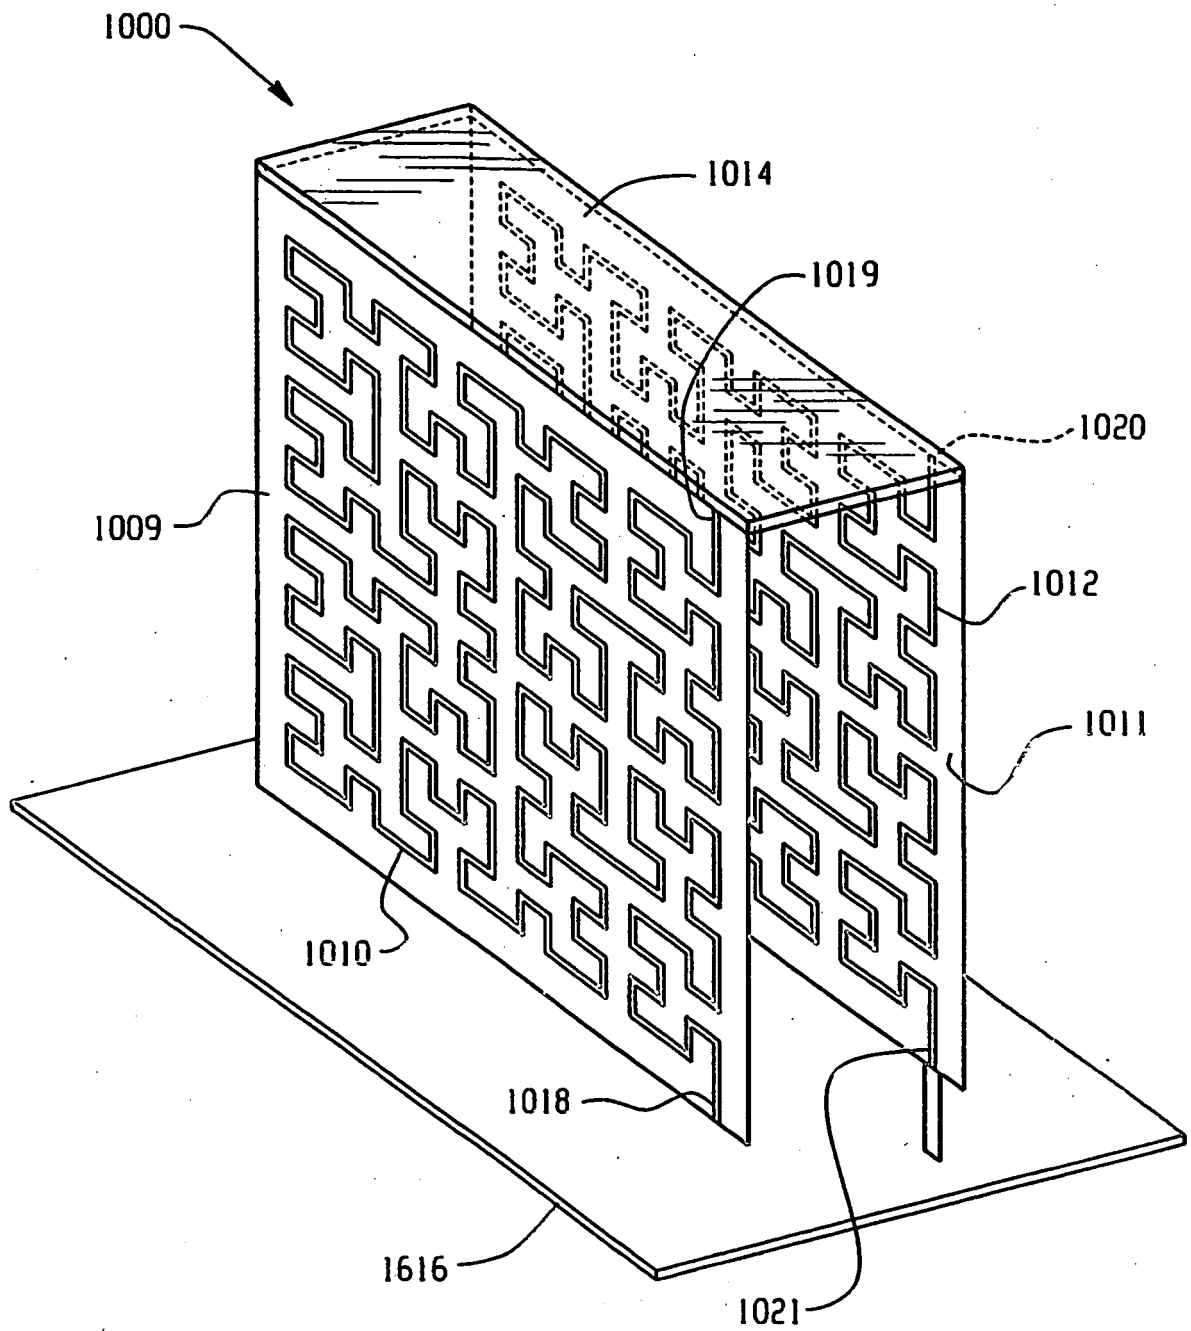



Fig. 16

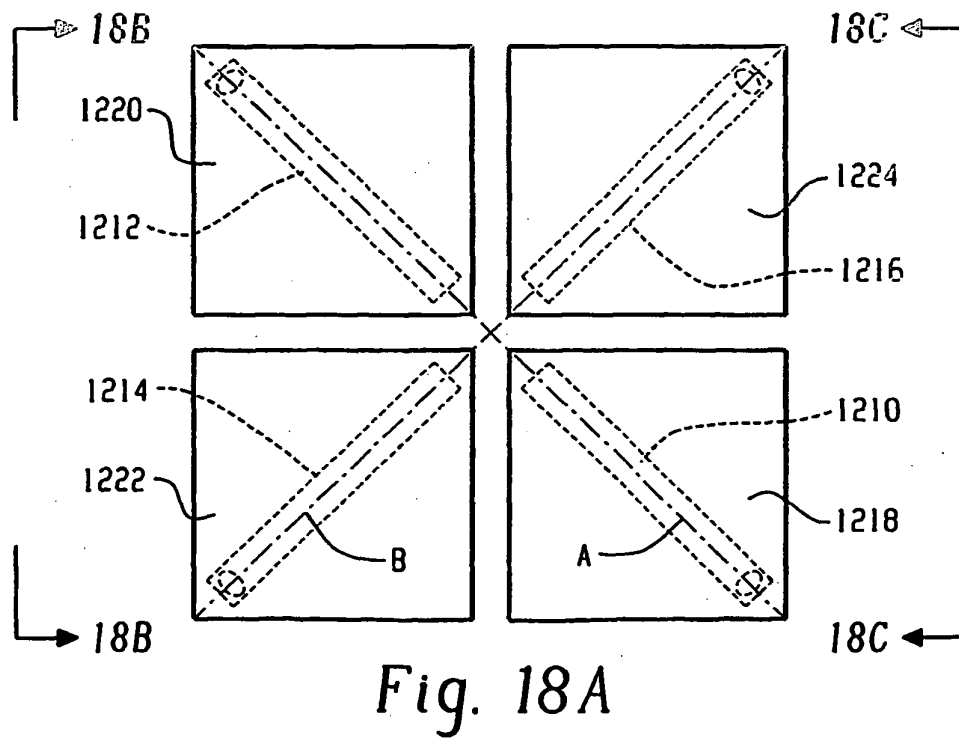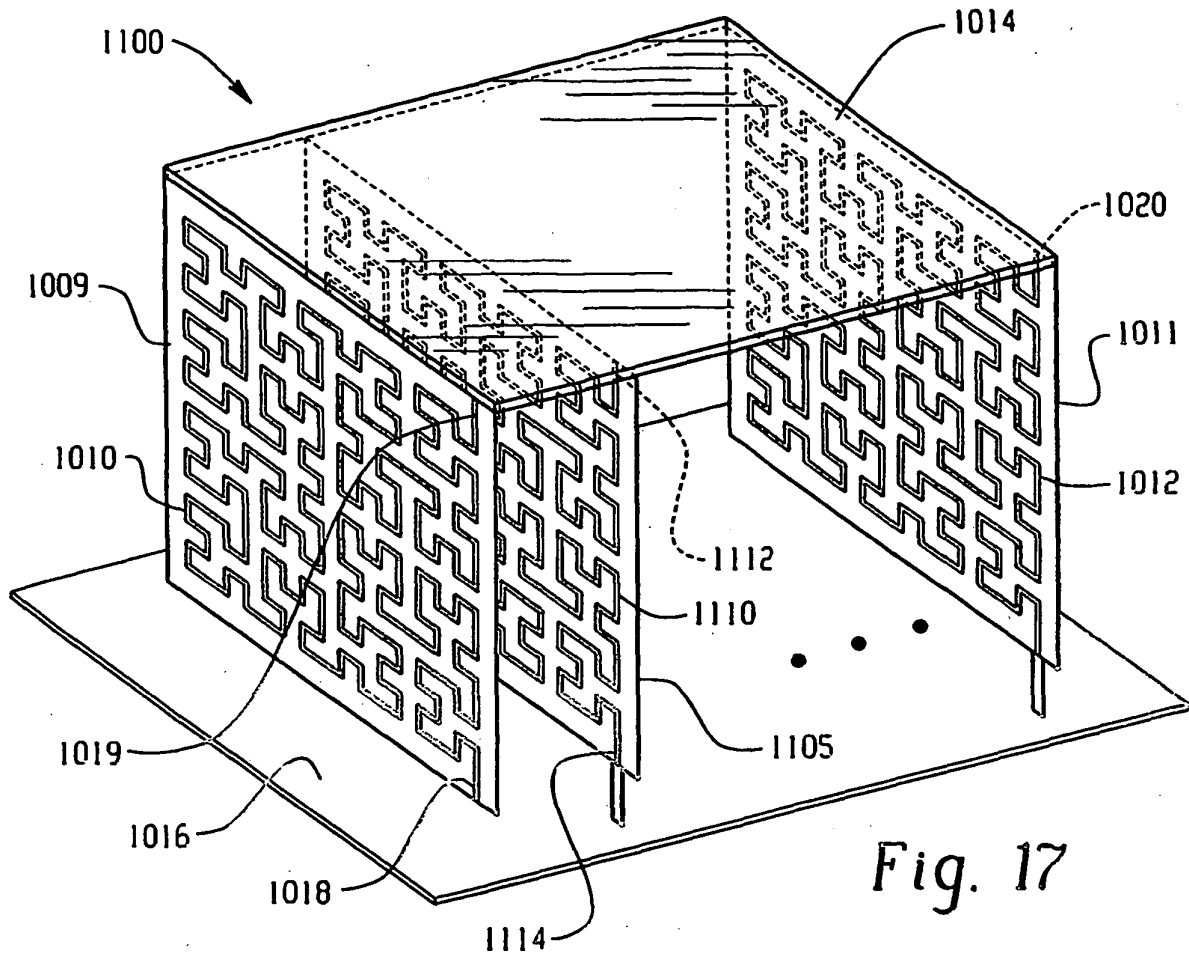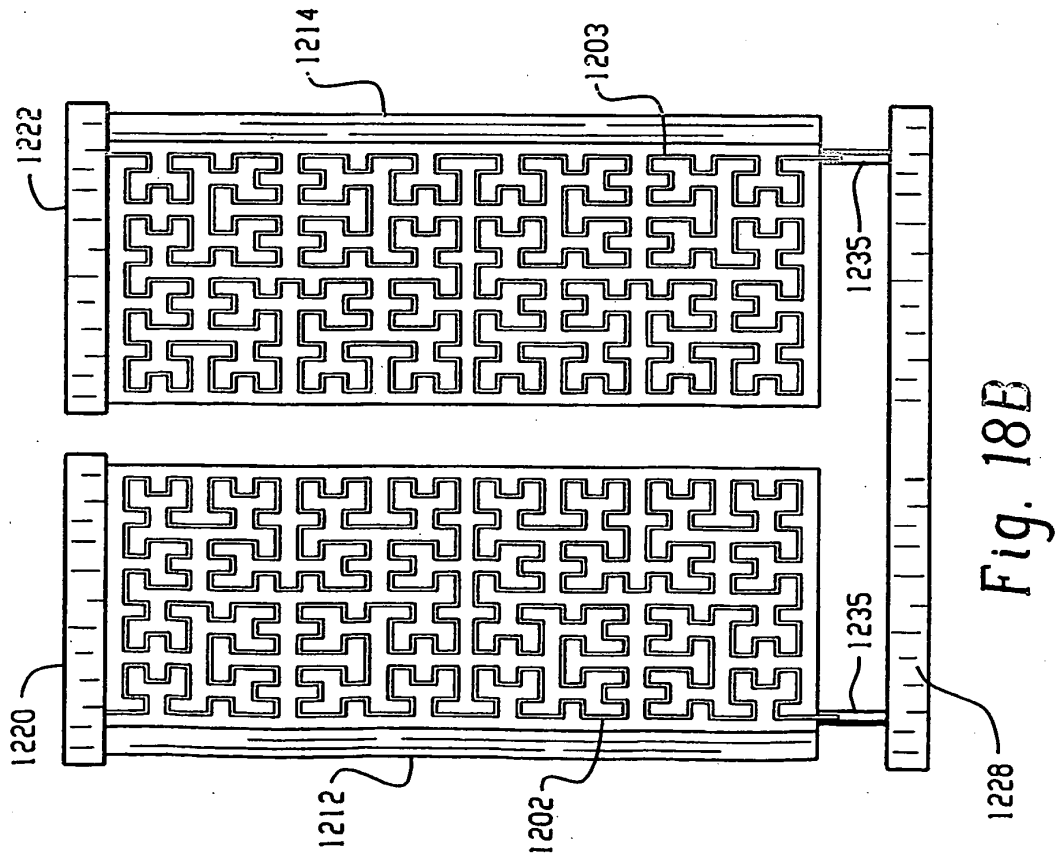

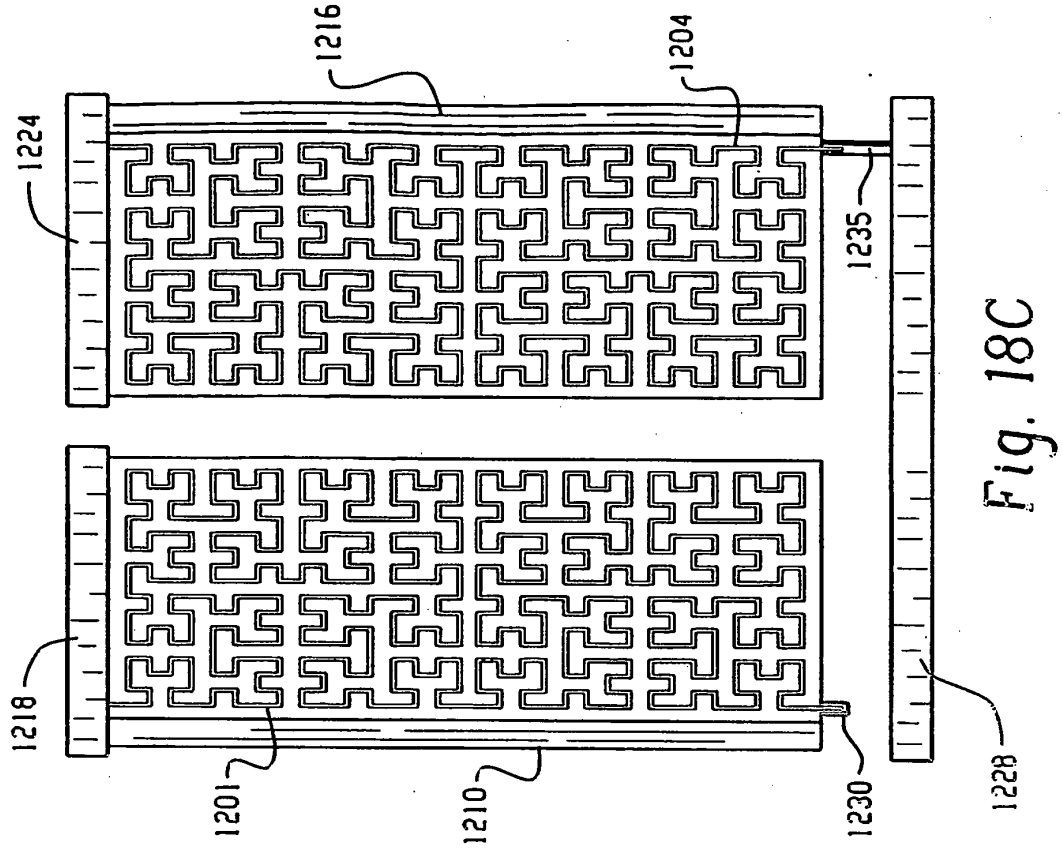


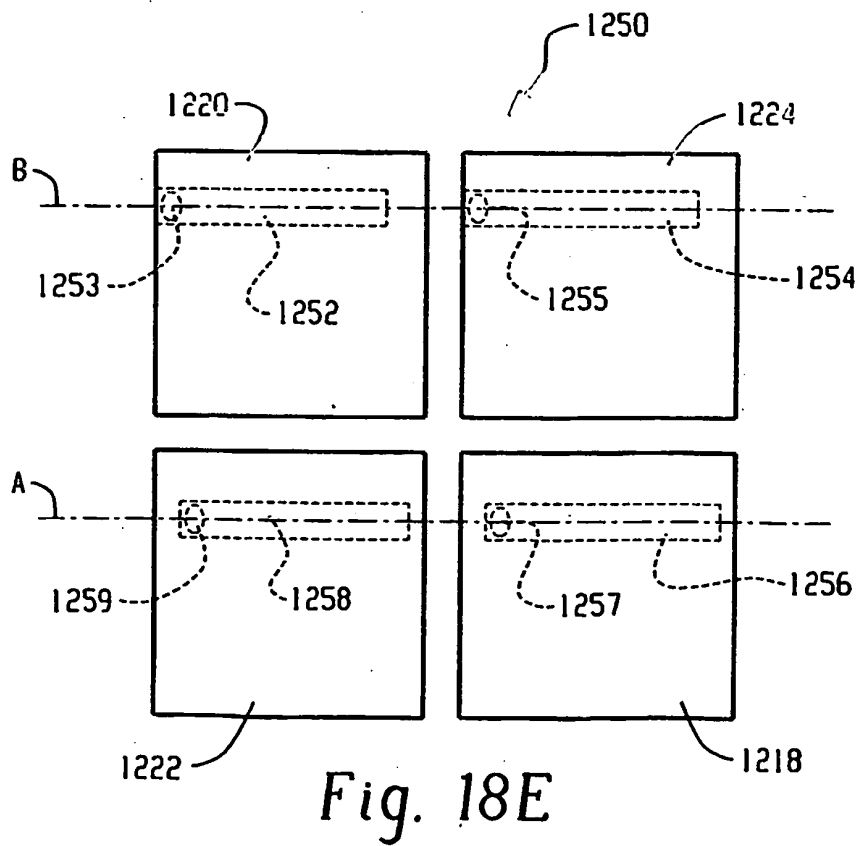


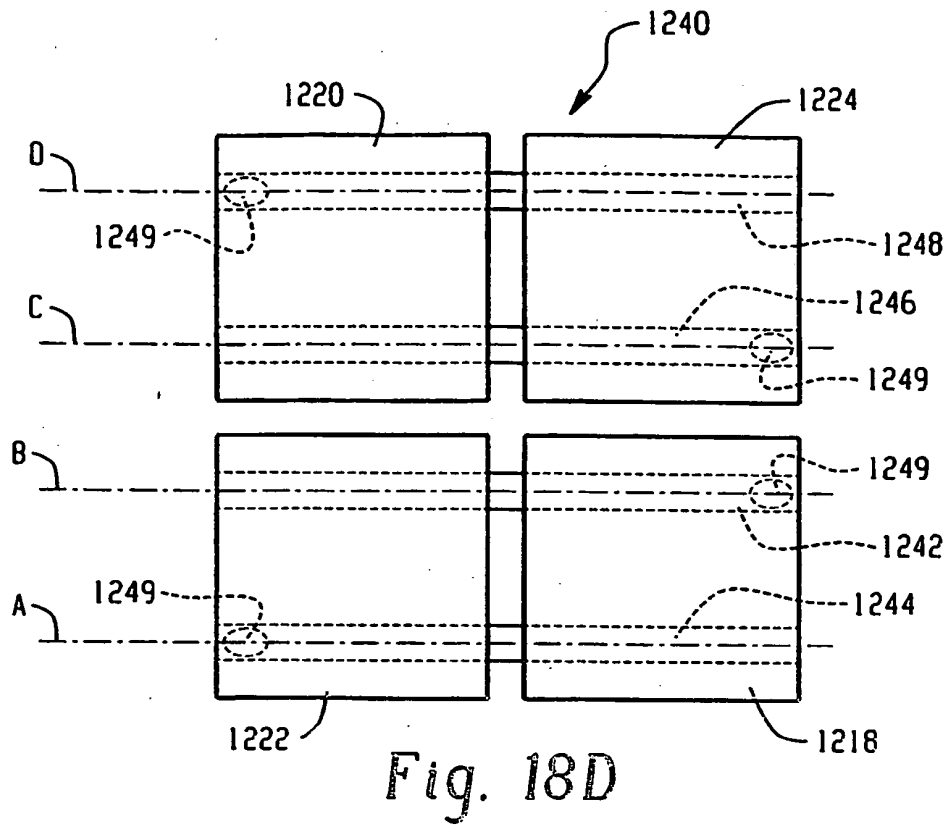



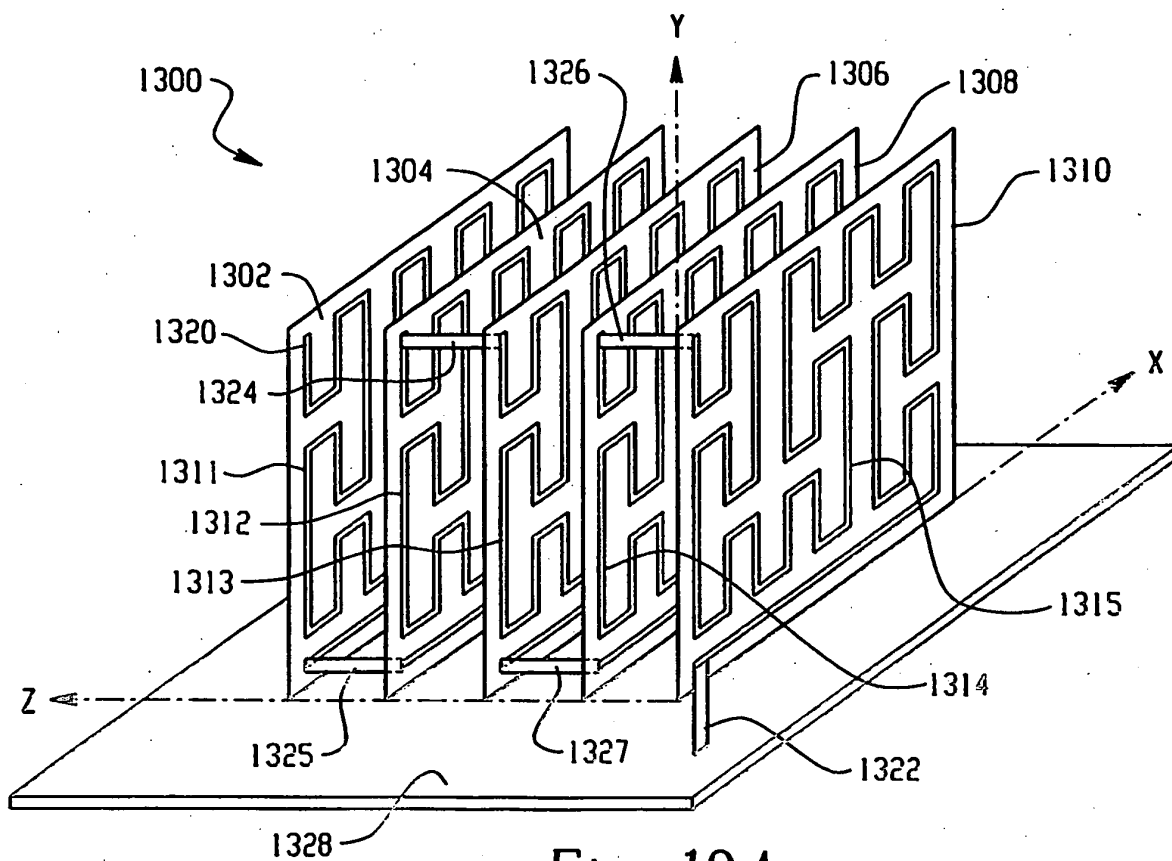


*Fig. 19A*

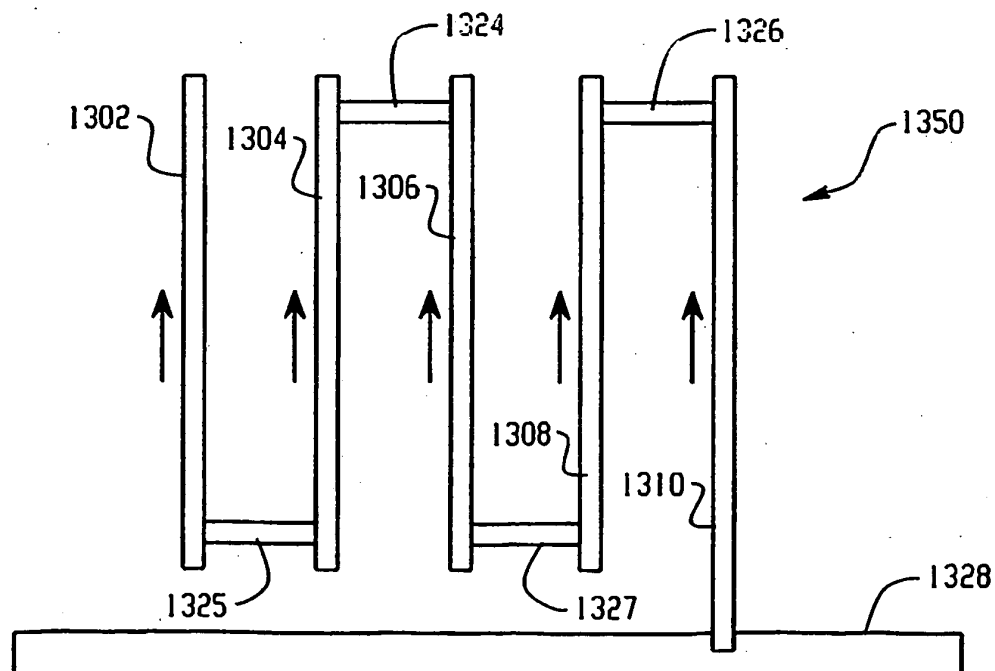

*Fig. 19B*

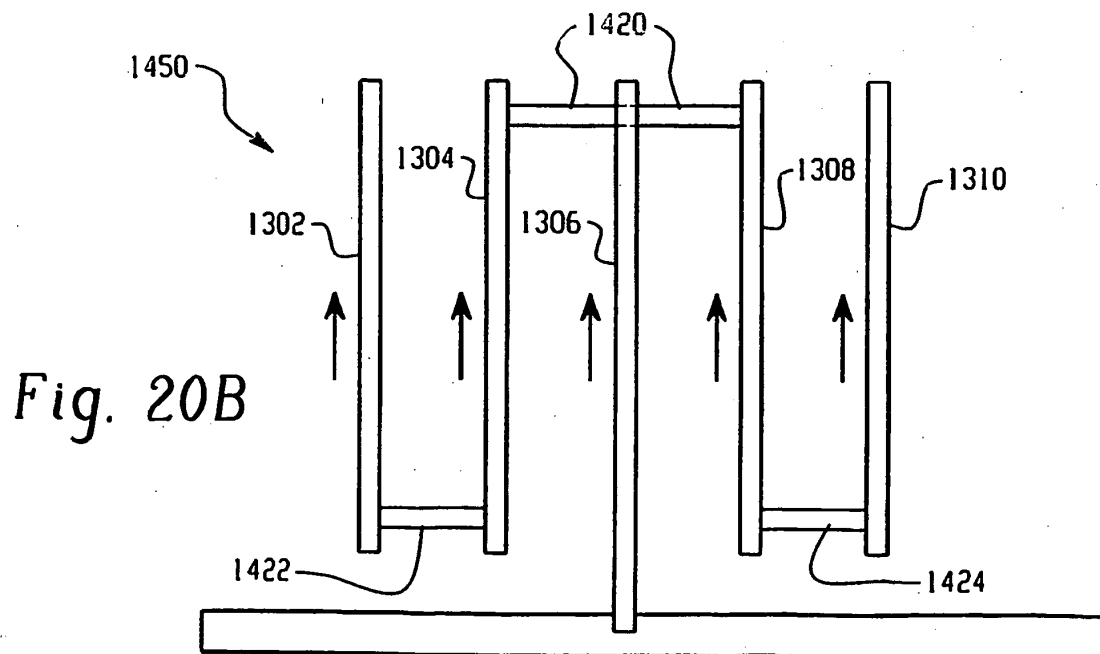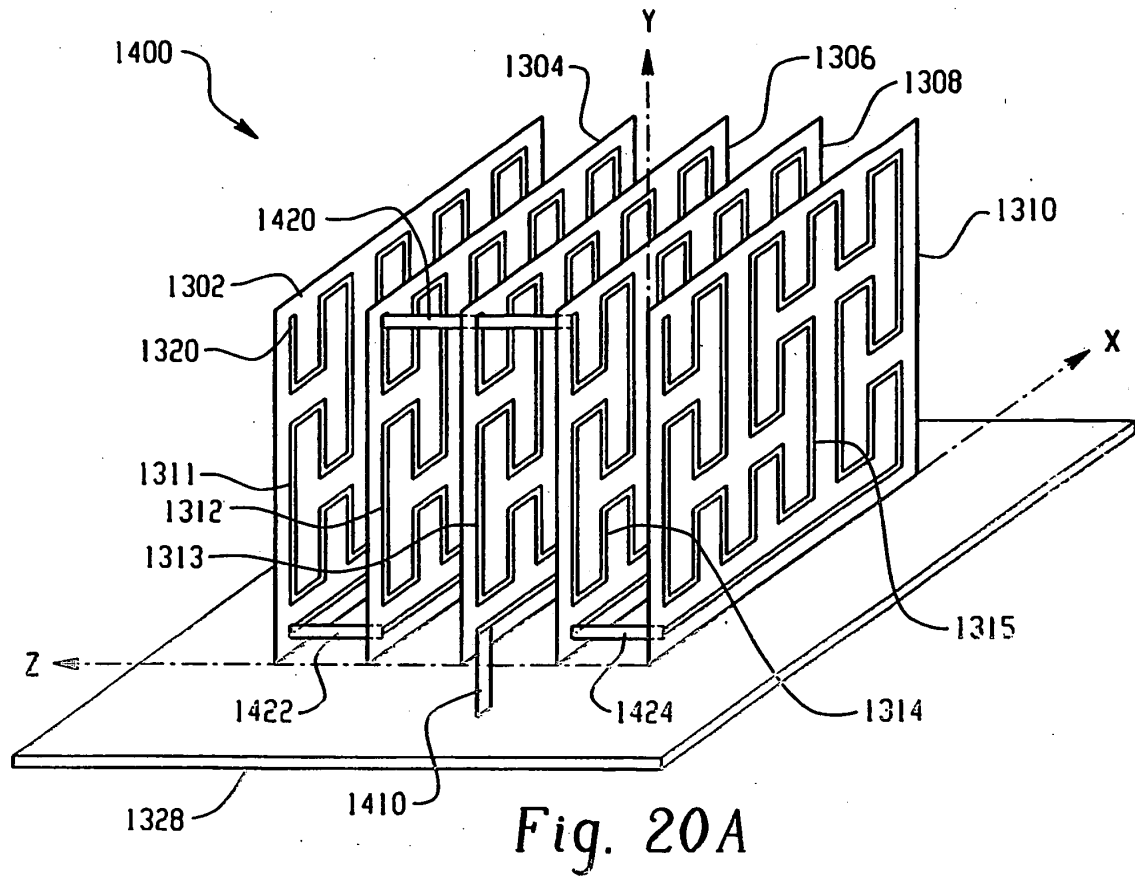

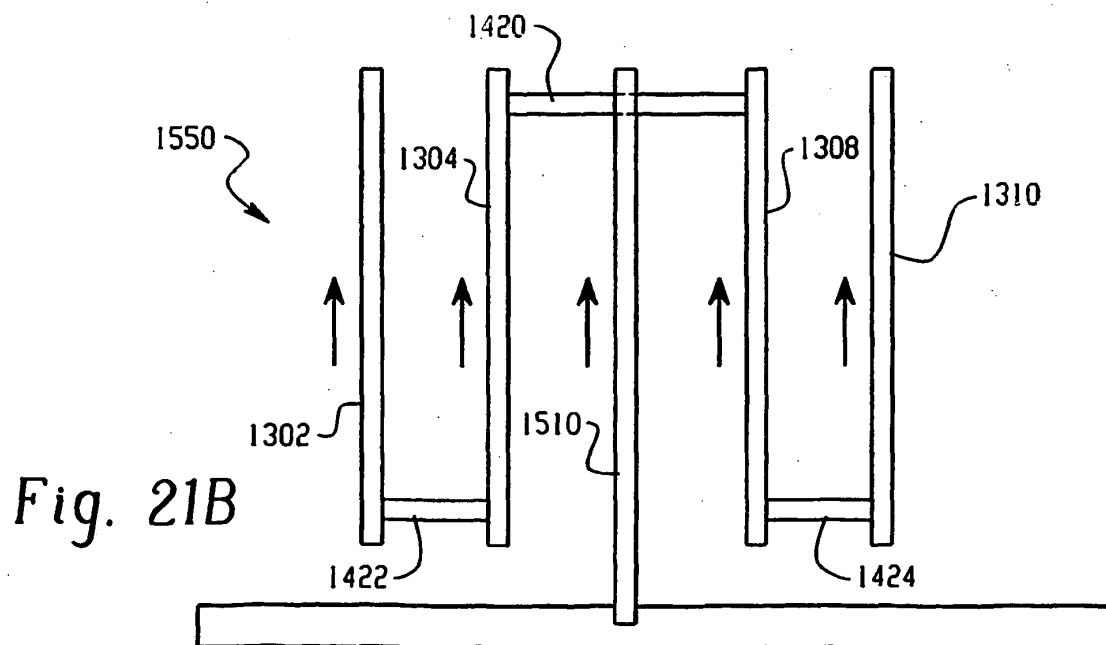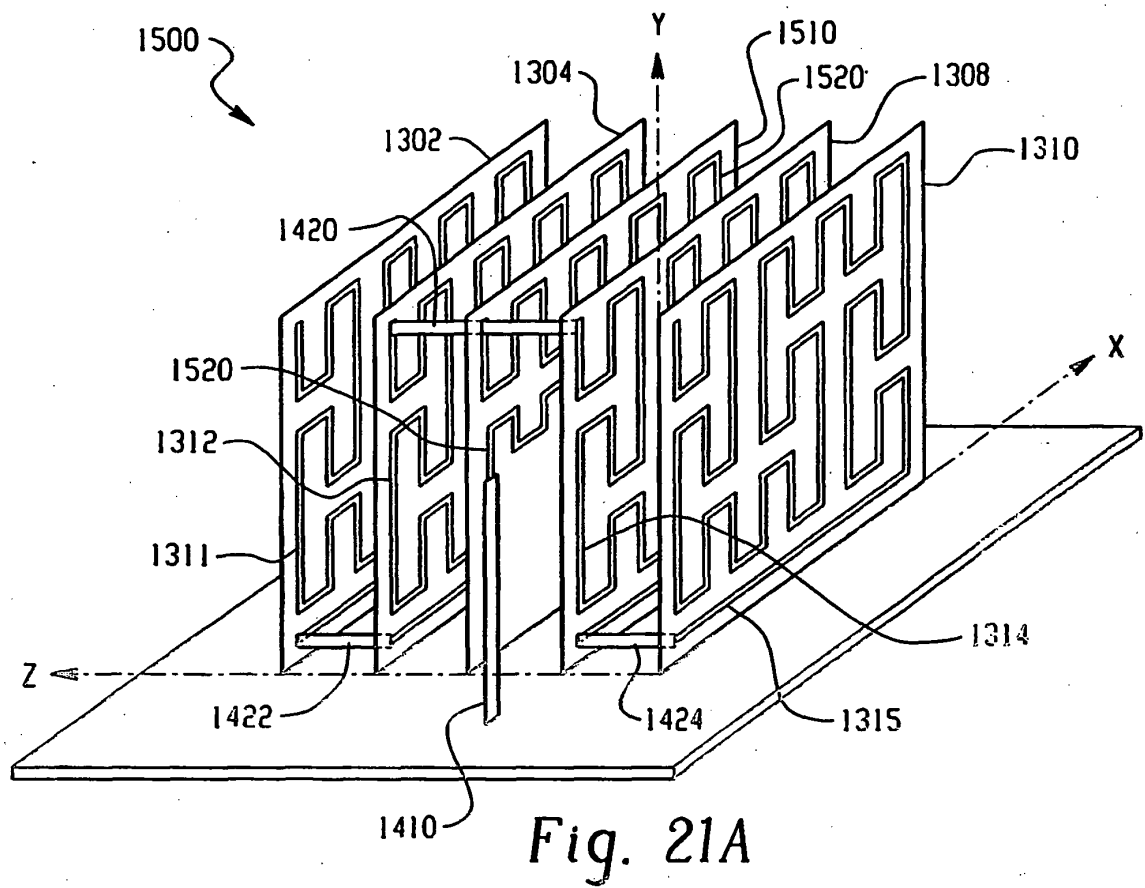

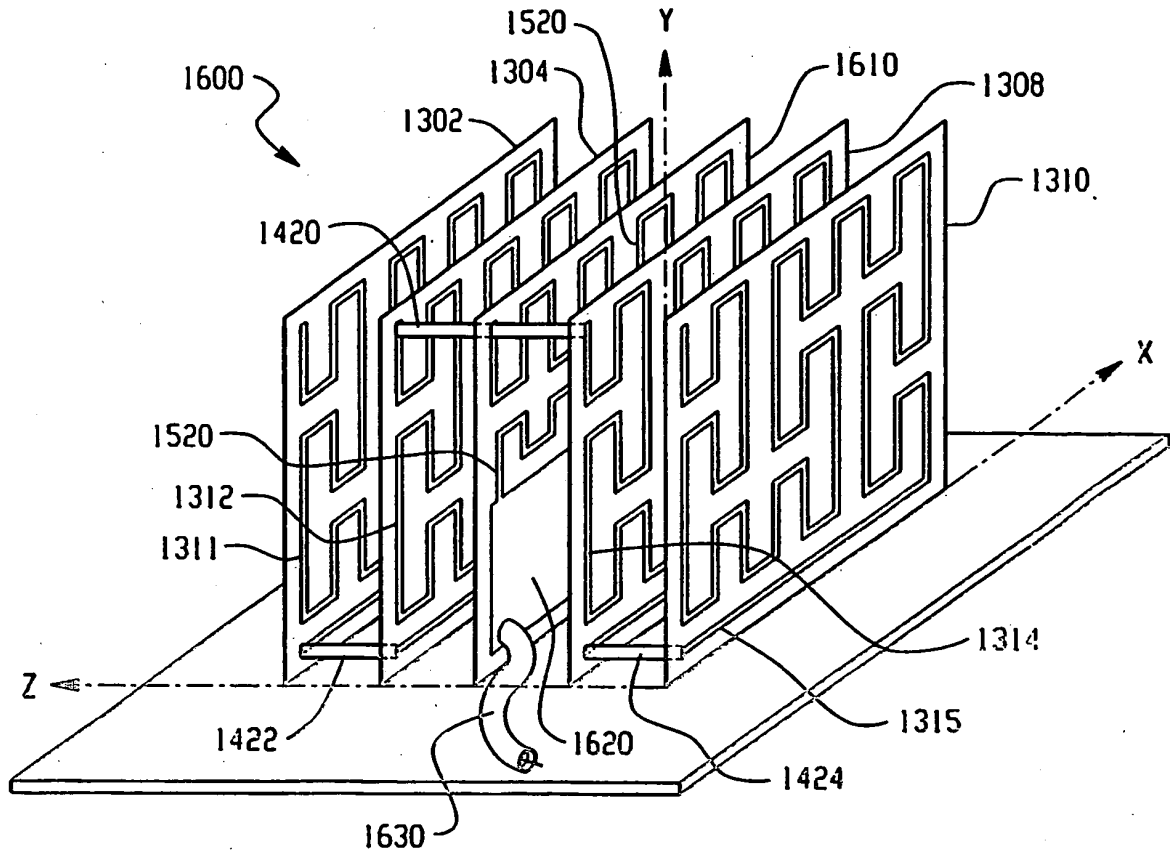


Fig. 22A

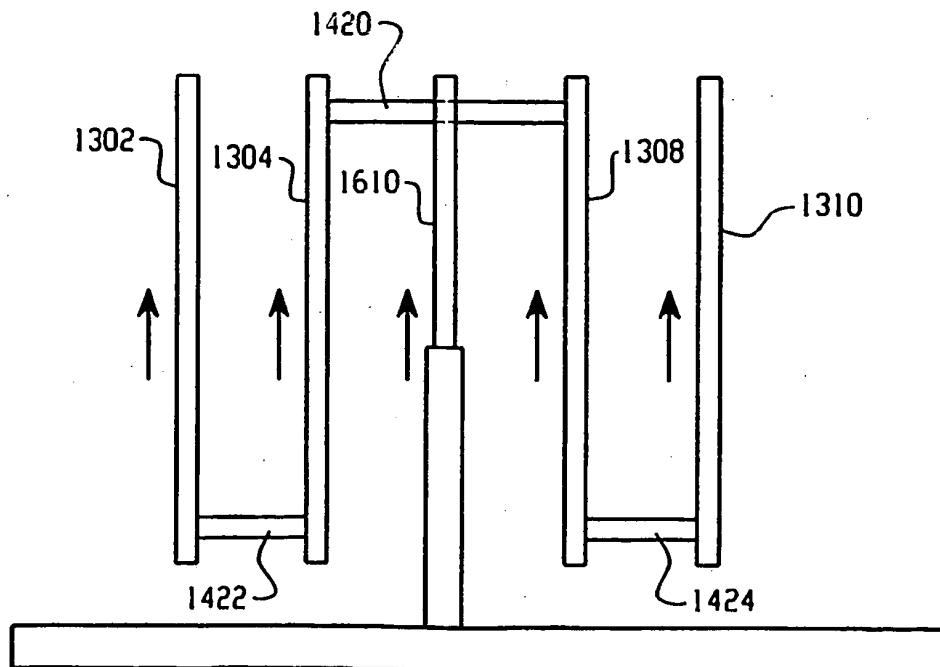


Fig. 22B

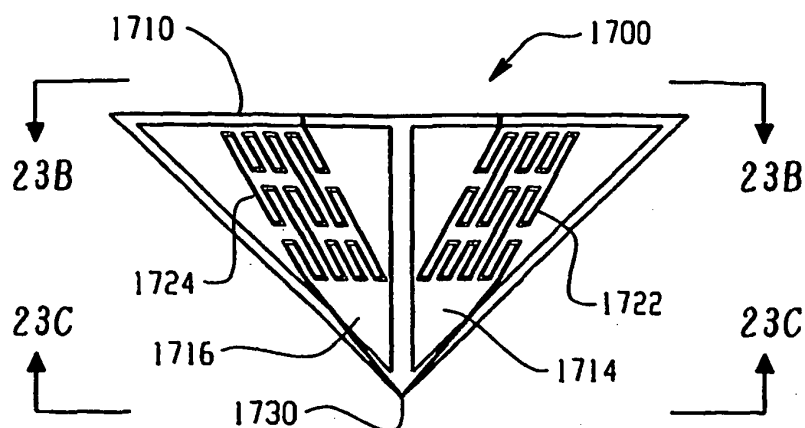


Fig. 23A

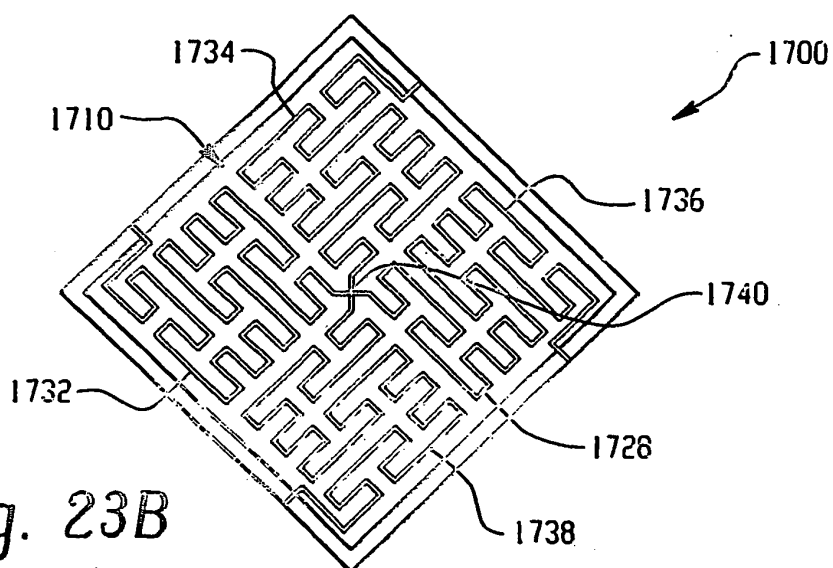


Fig. 23B

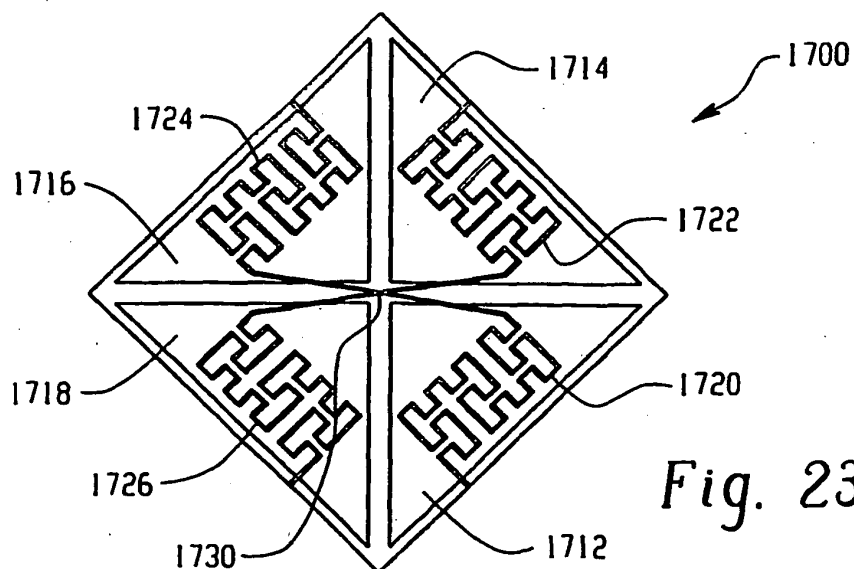


Fig. 23C

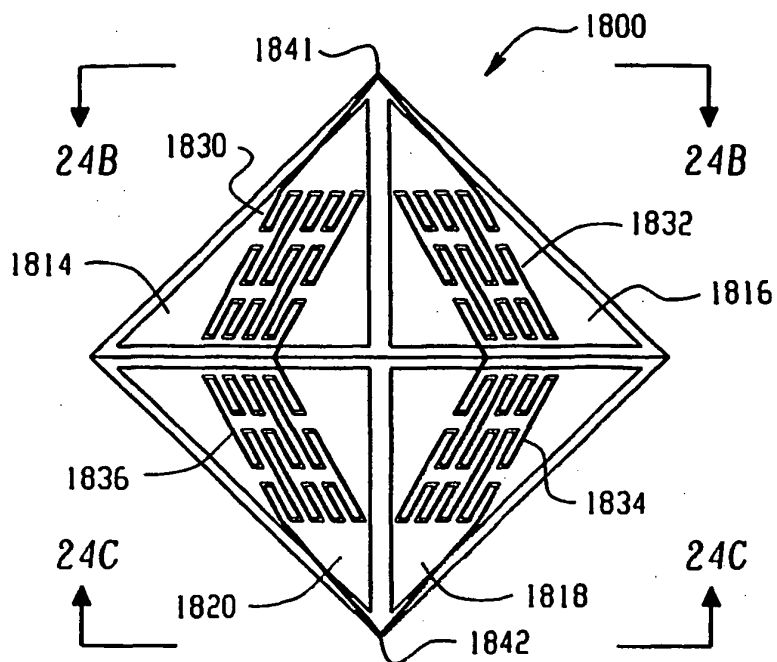


Fig. 24A

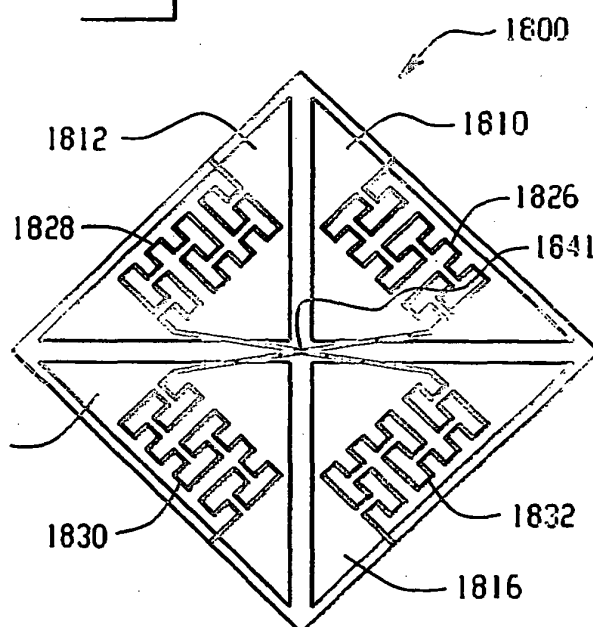


Fig. 24B

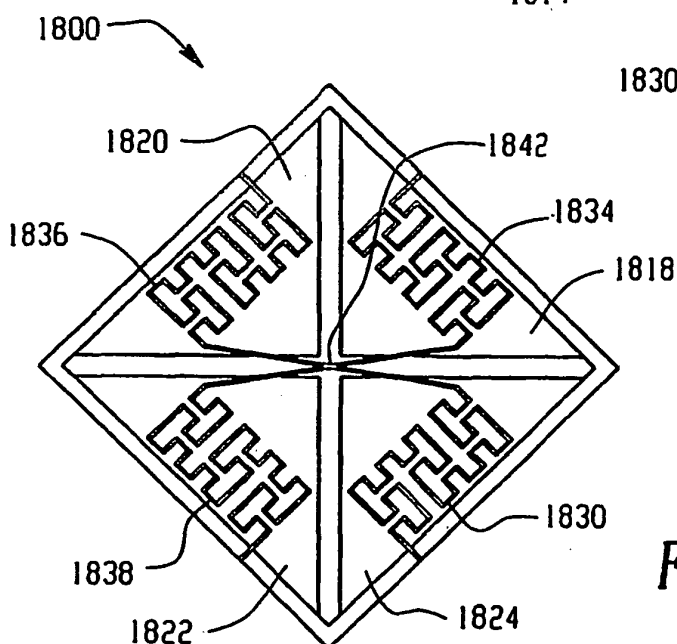


Fig. 24C

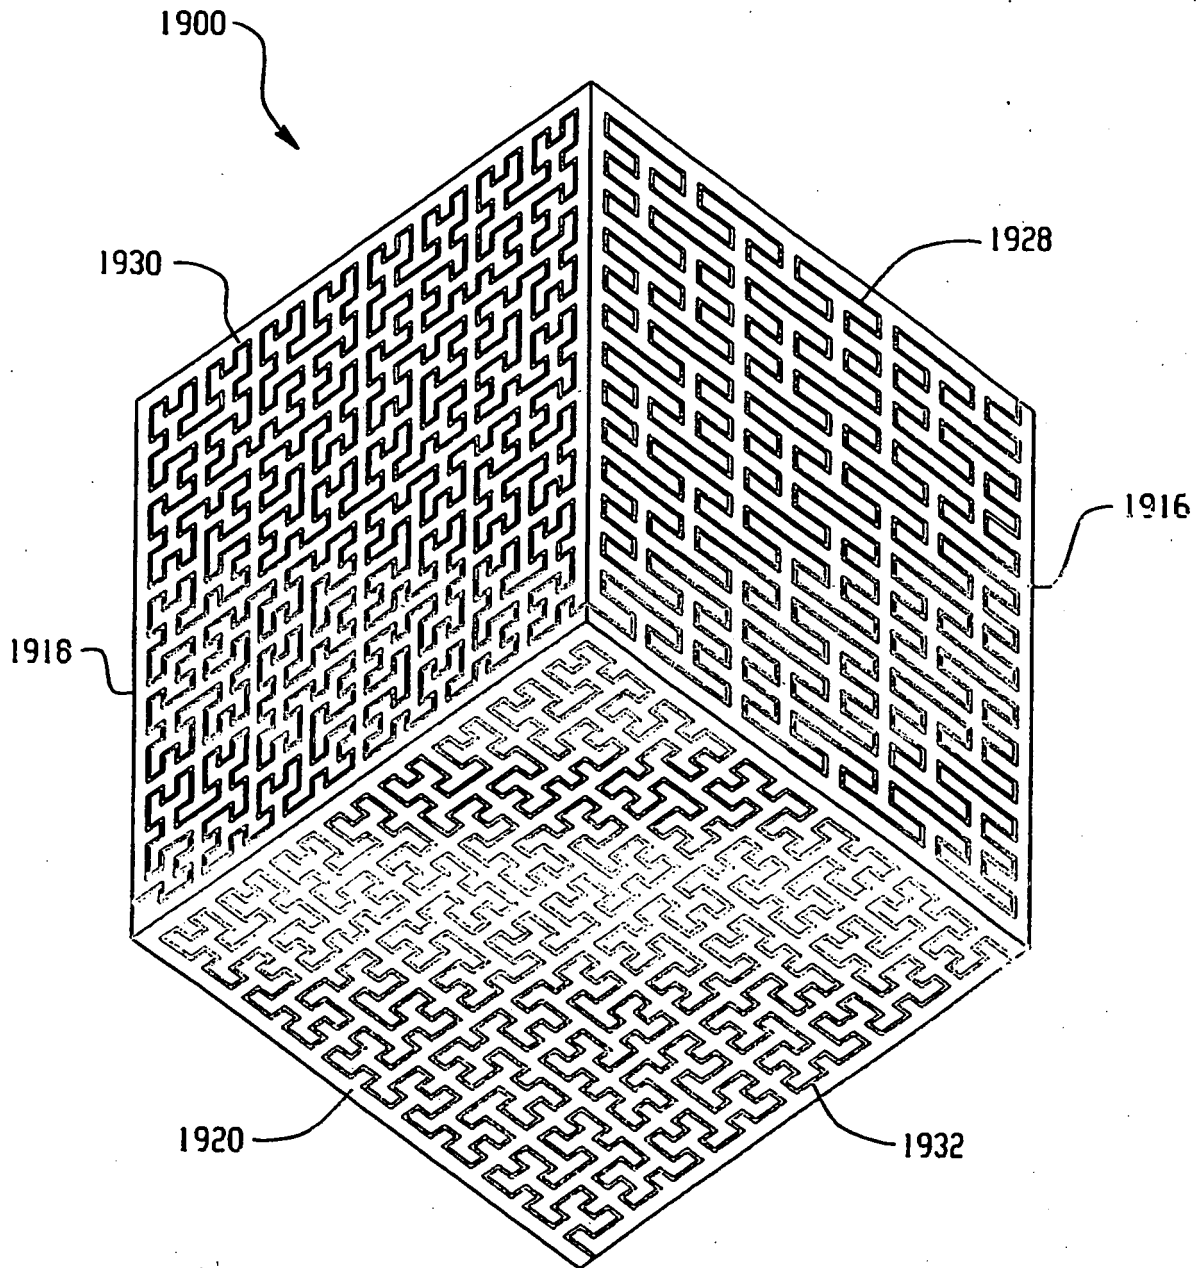


Fig. 25






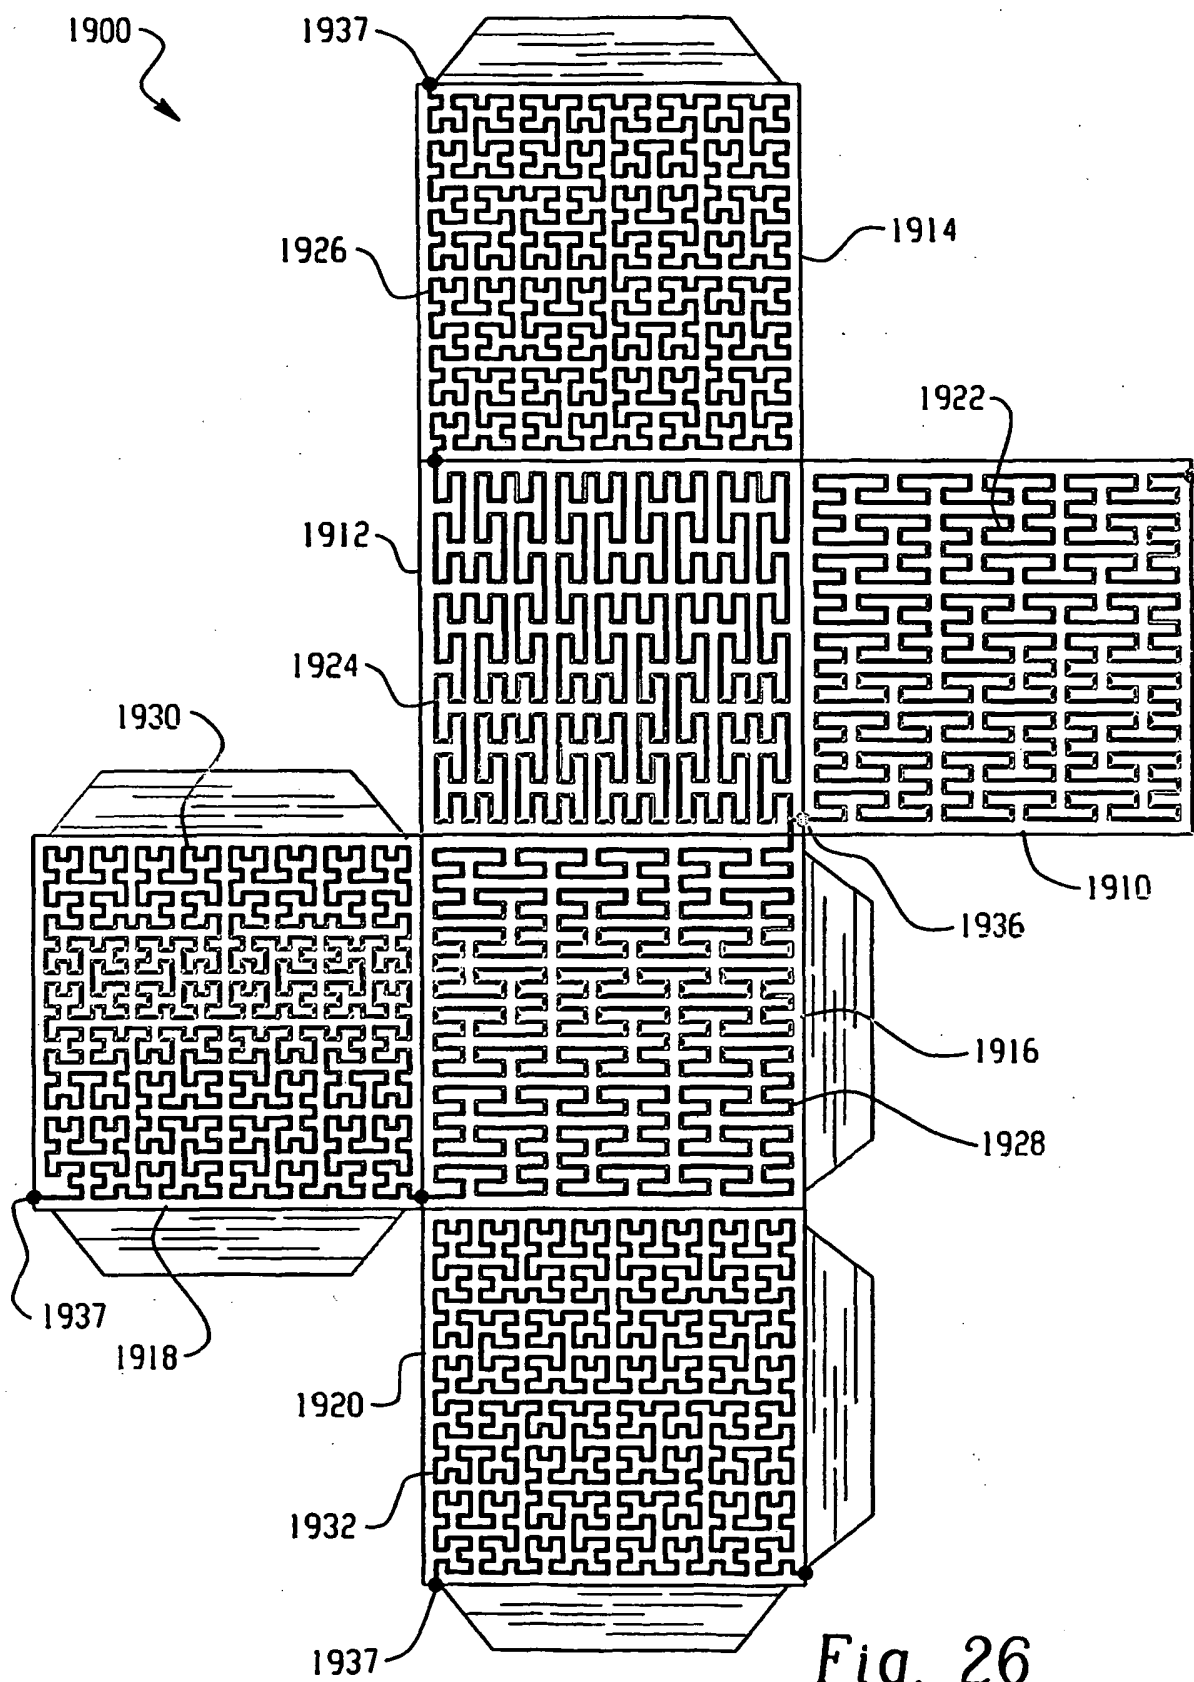


Fig. 26

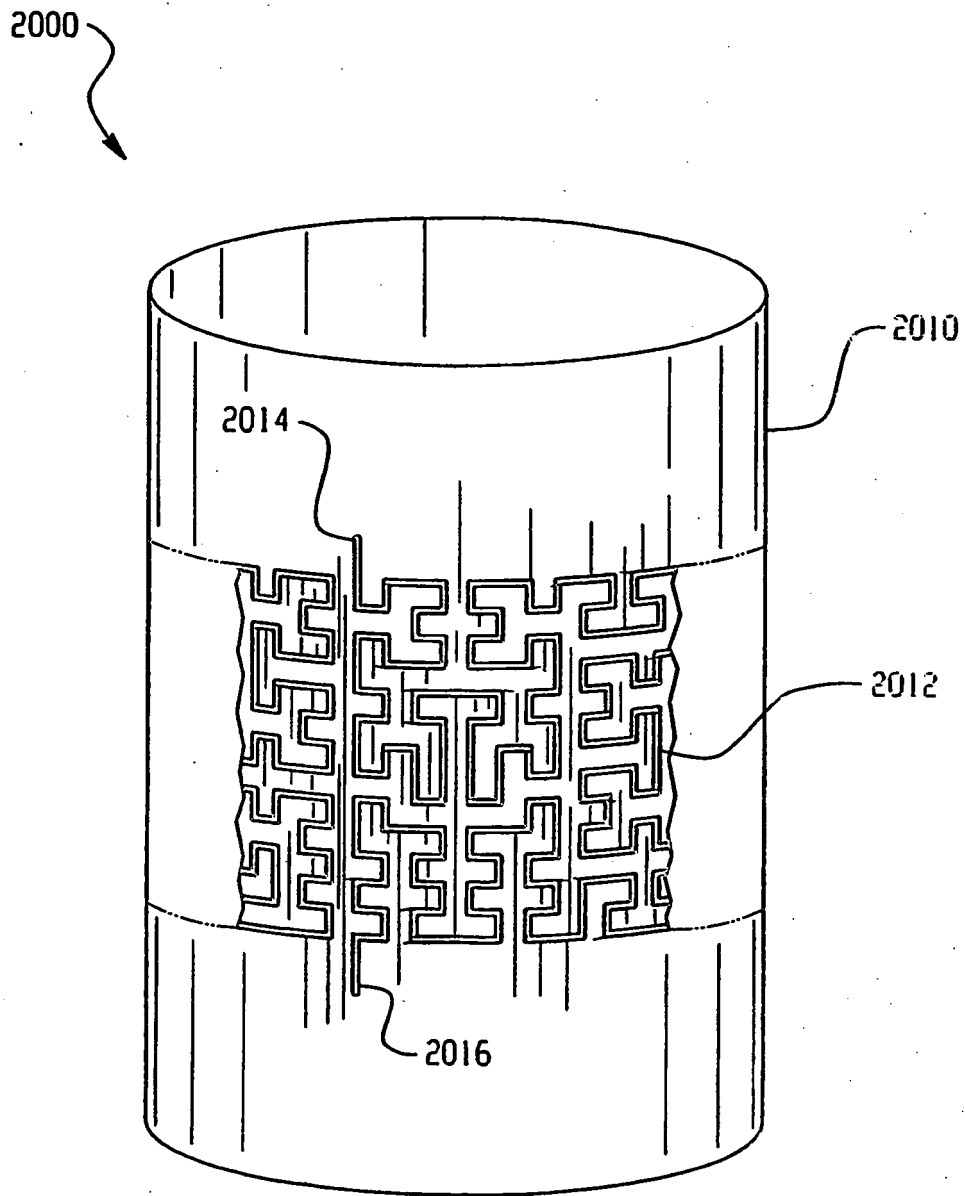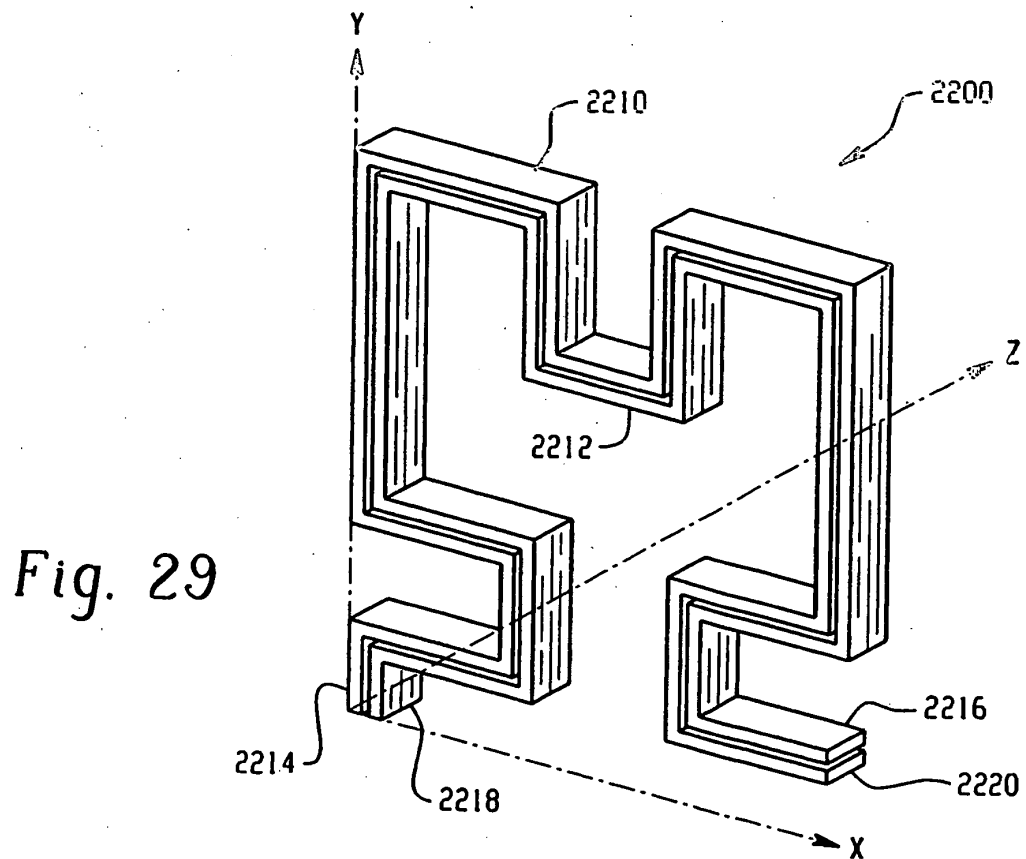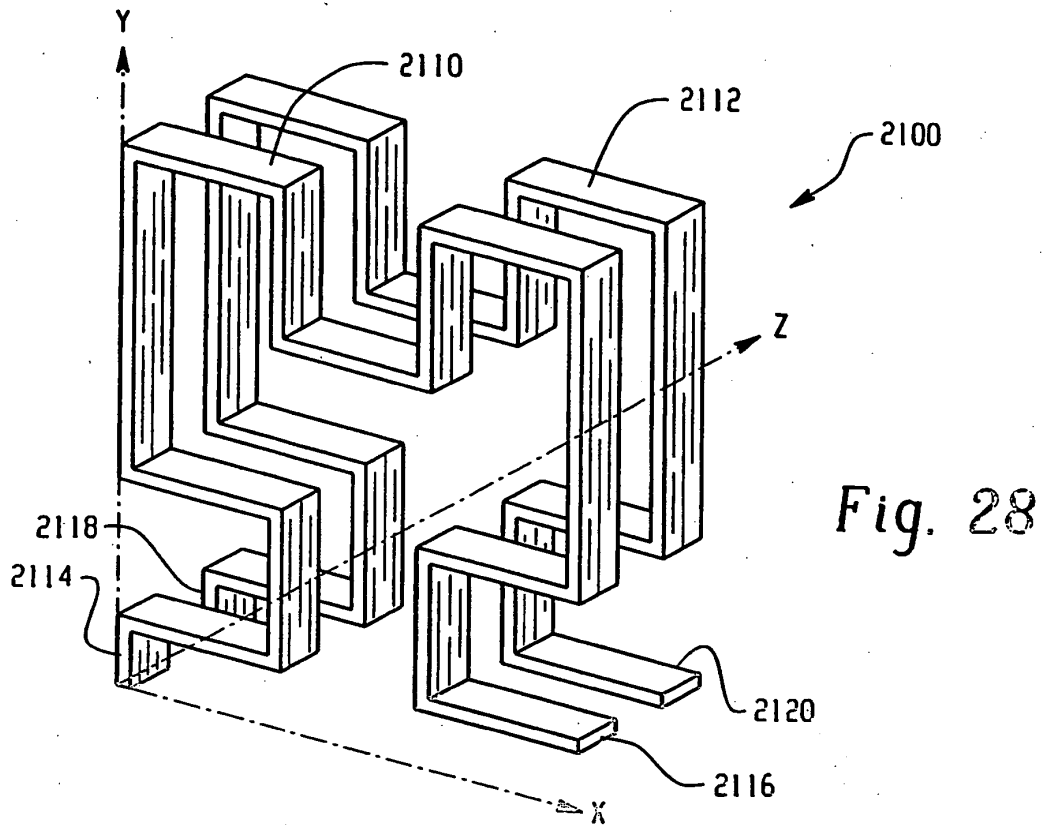

*Fig. 27*



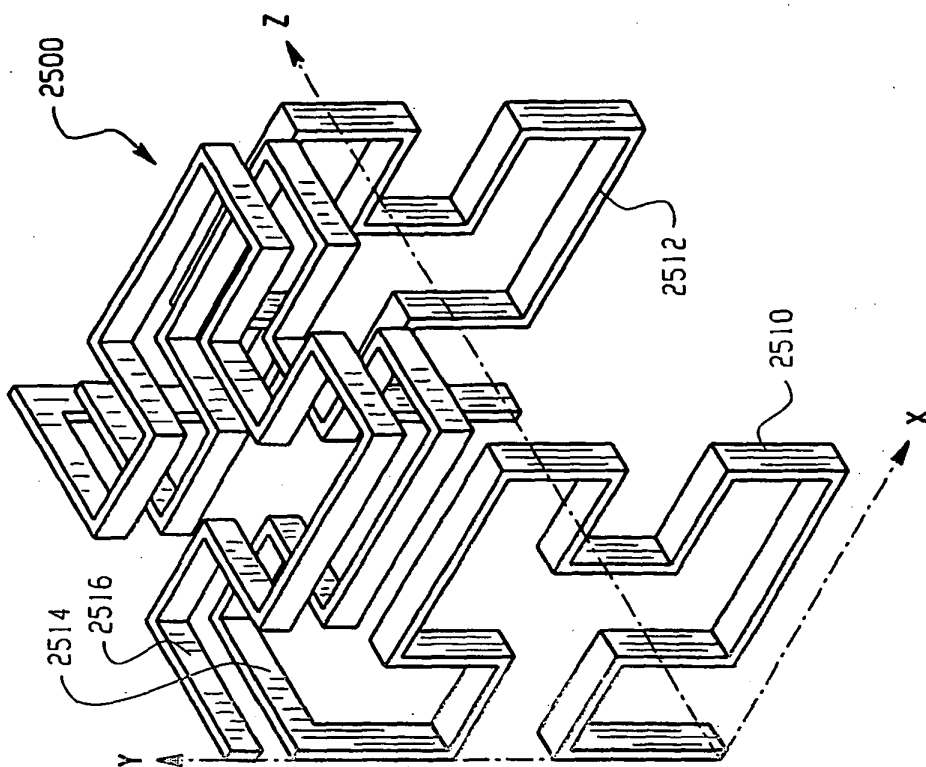


Fig. 32

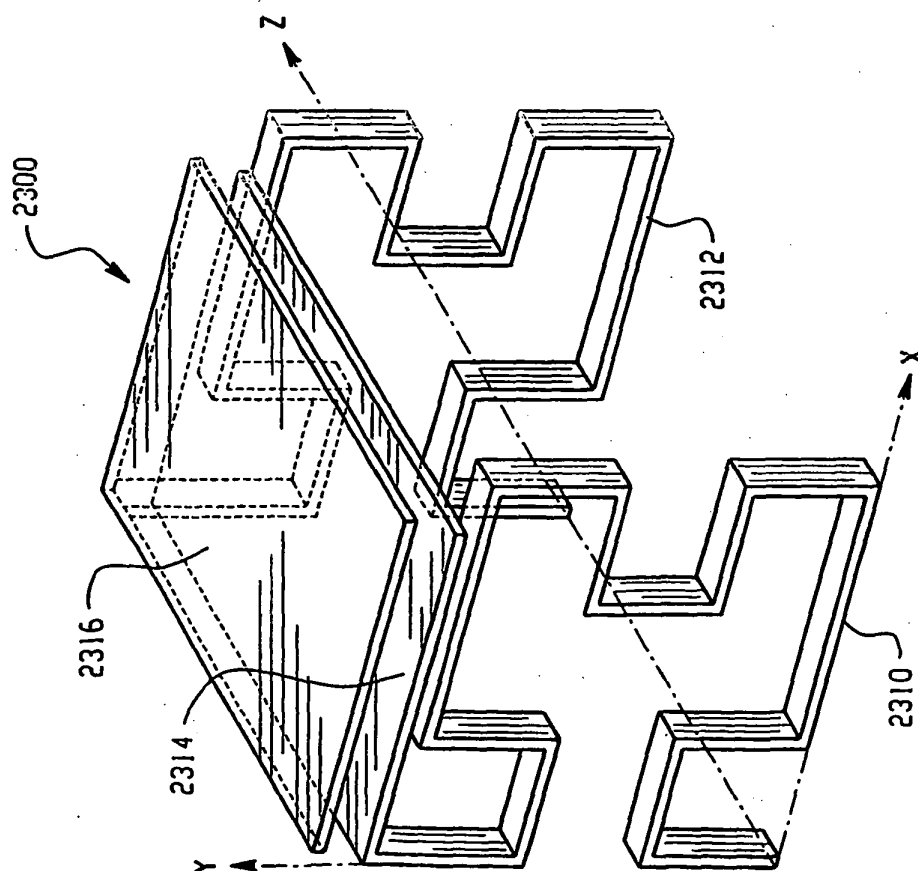


Fig. 30

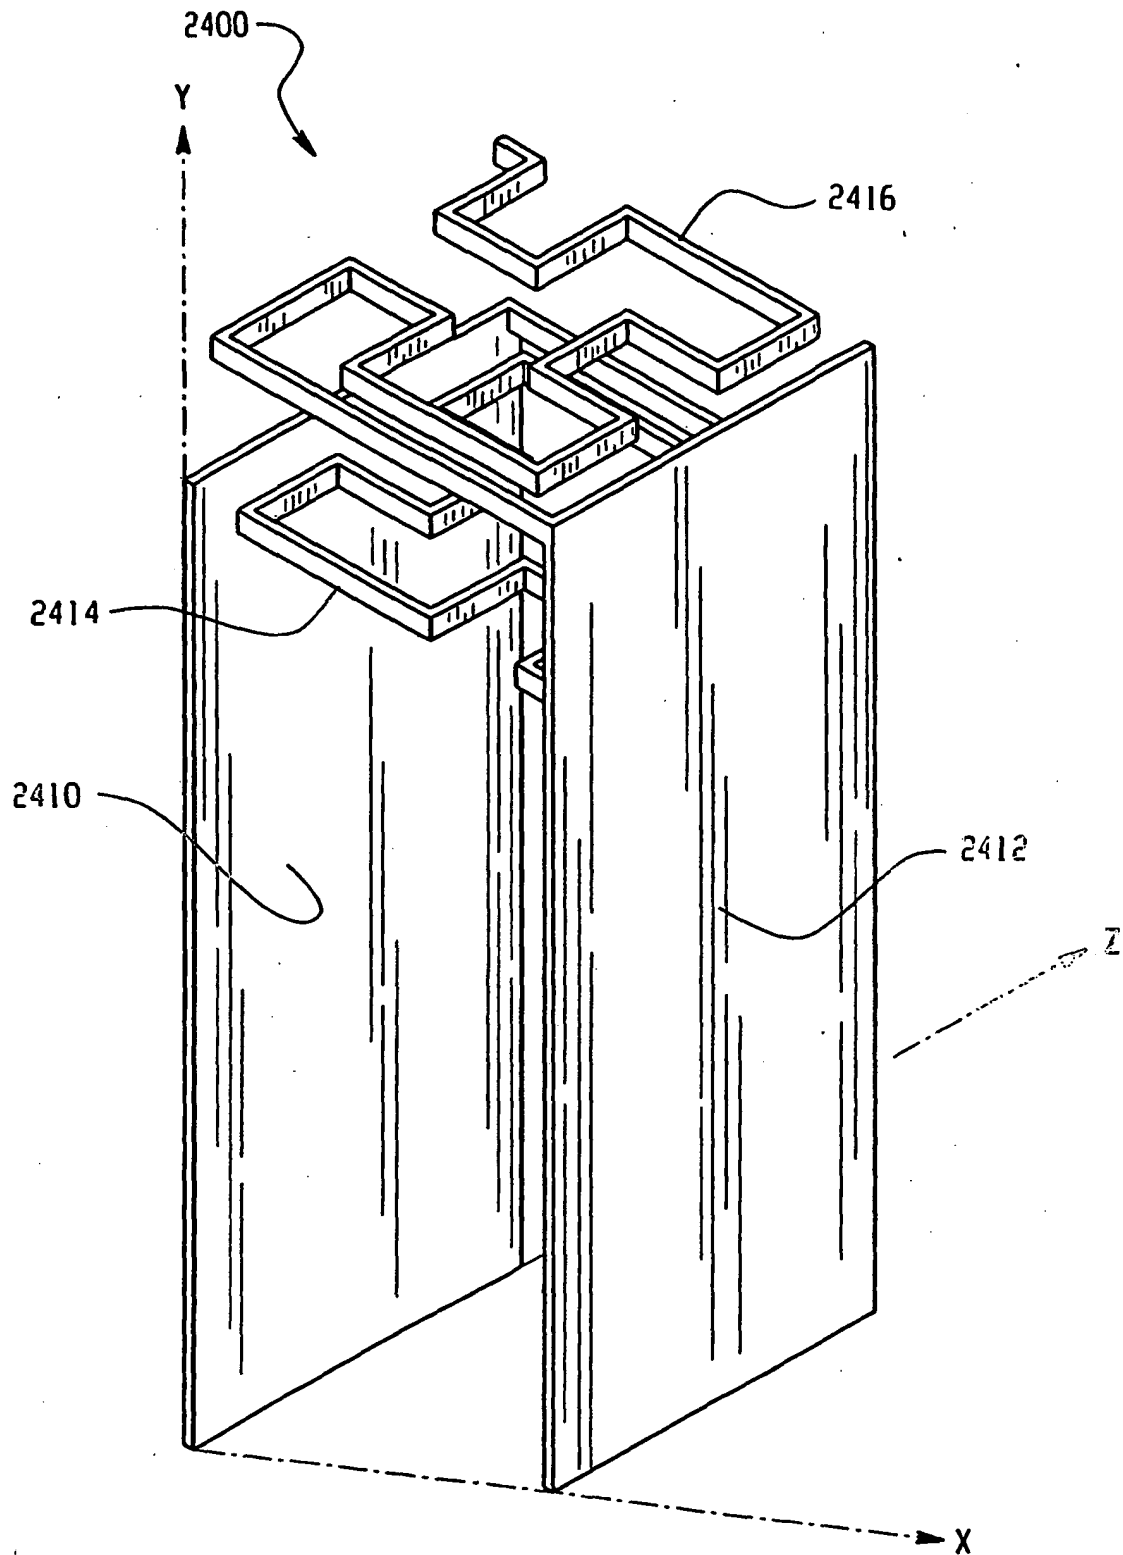


Fig. 31

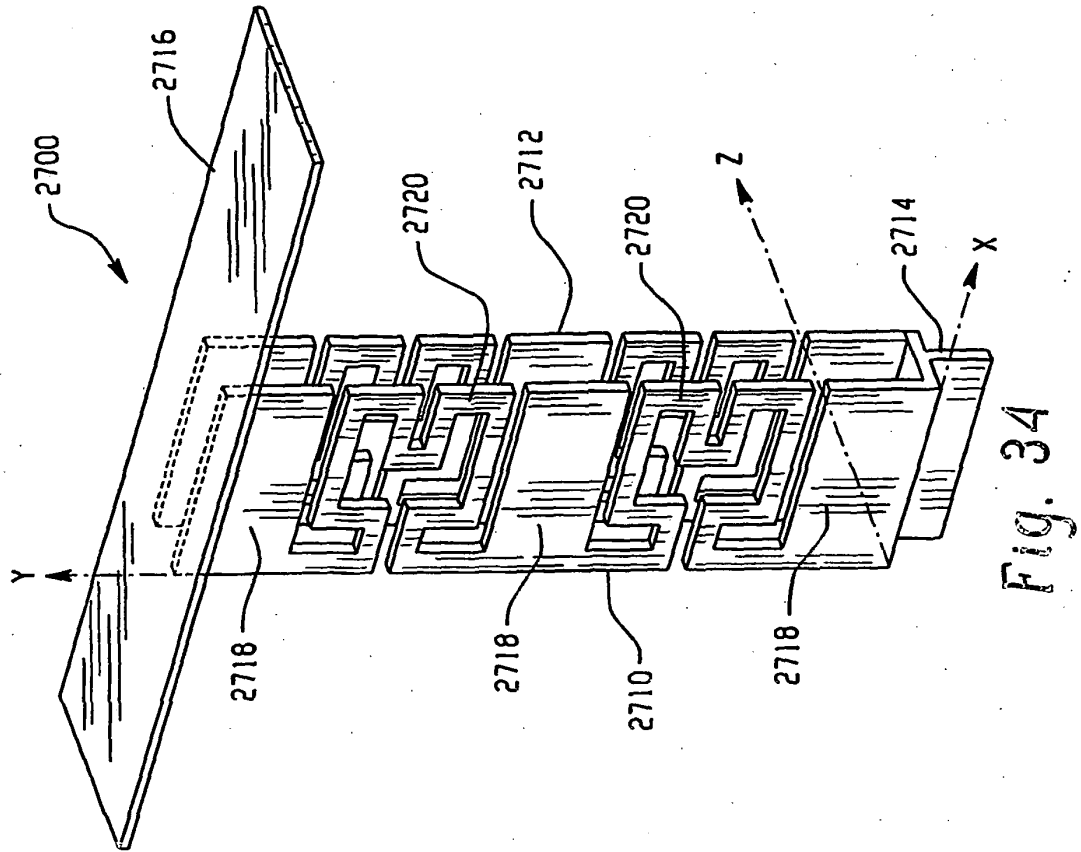


Fig. 34



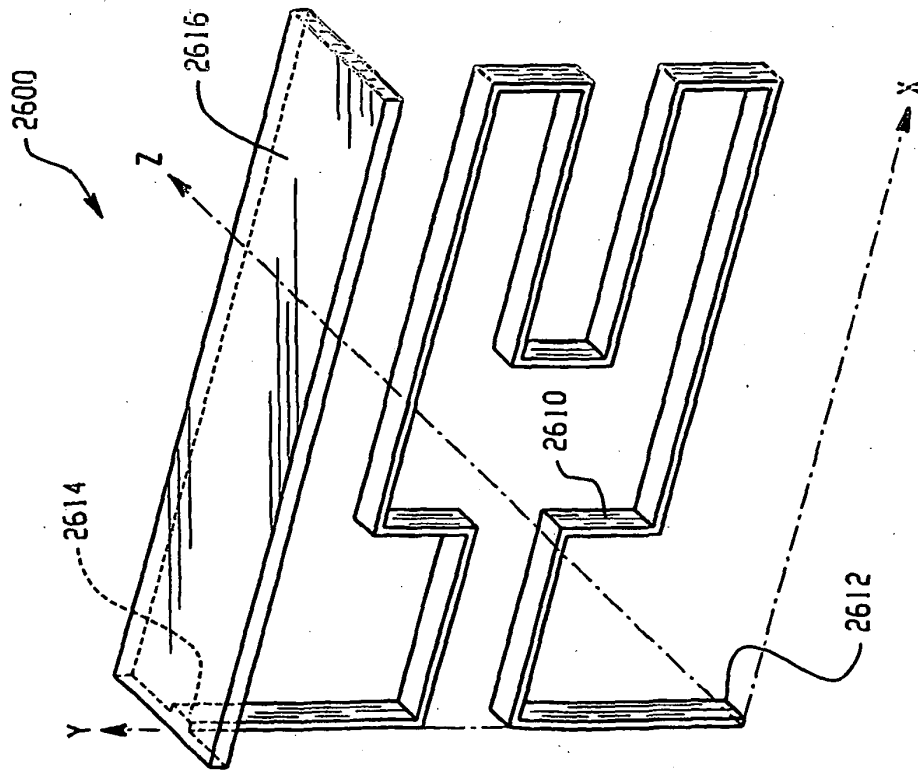


Fig. 33

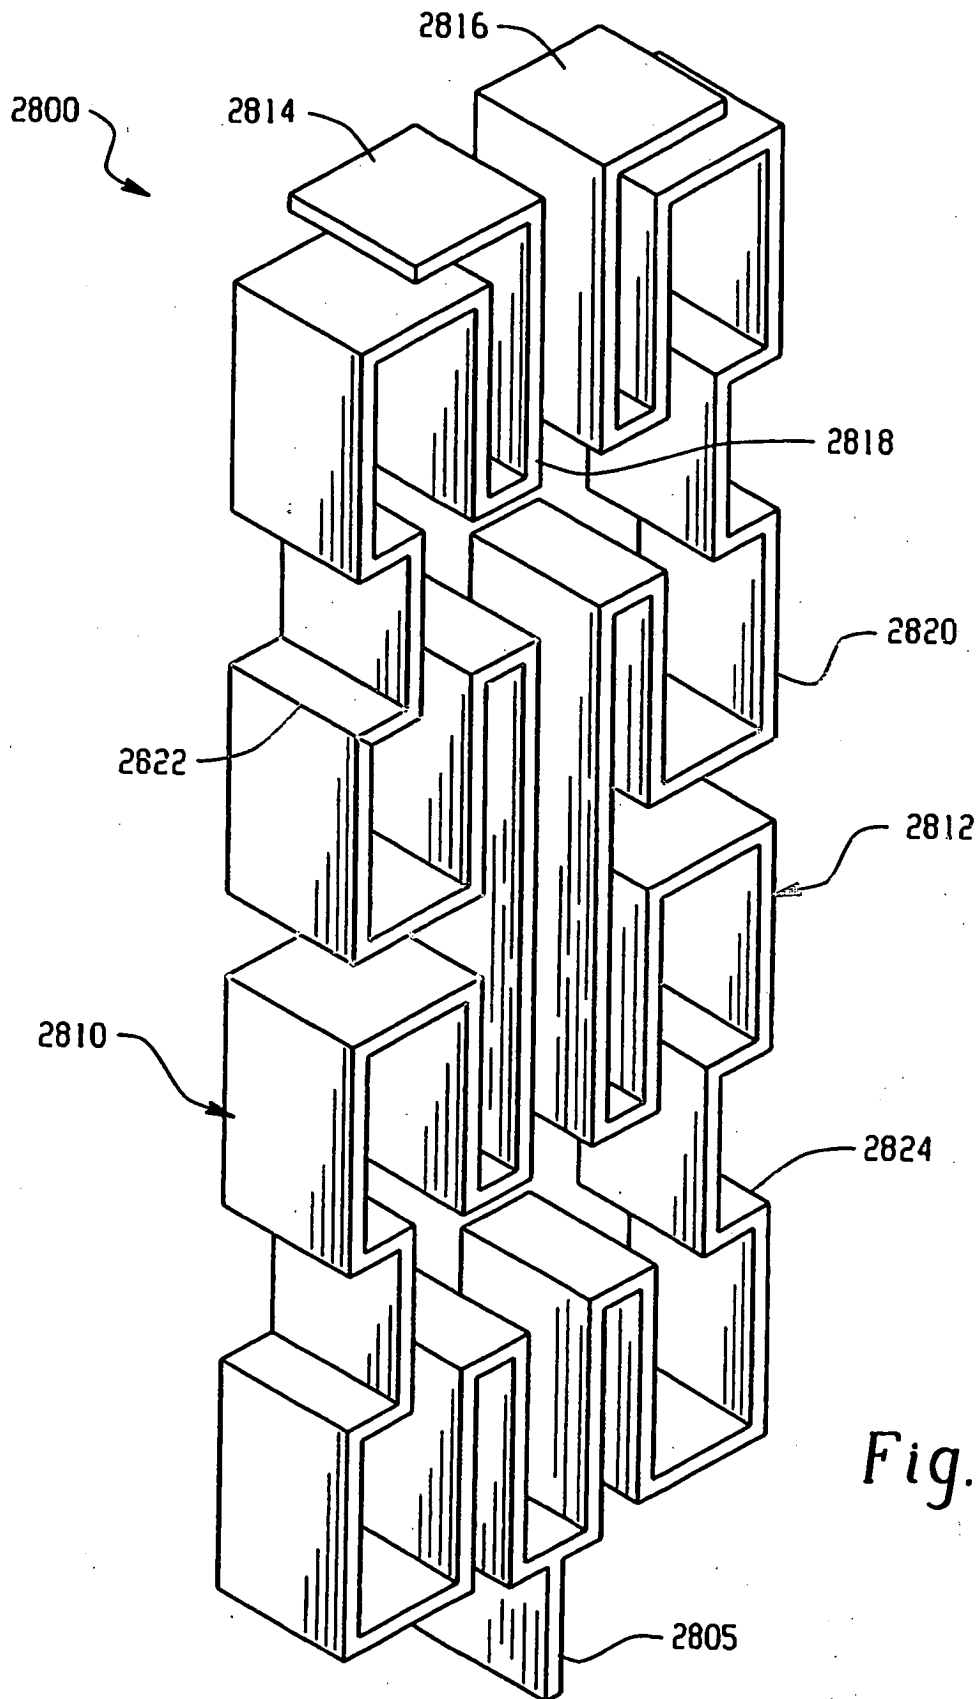

*Fig. 35*

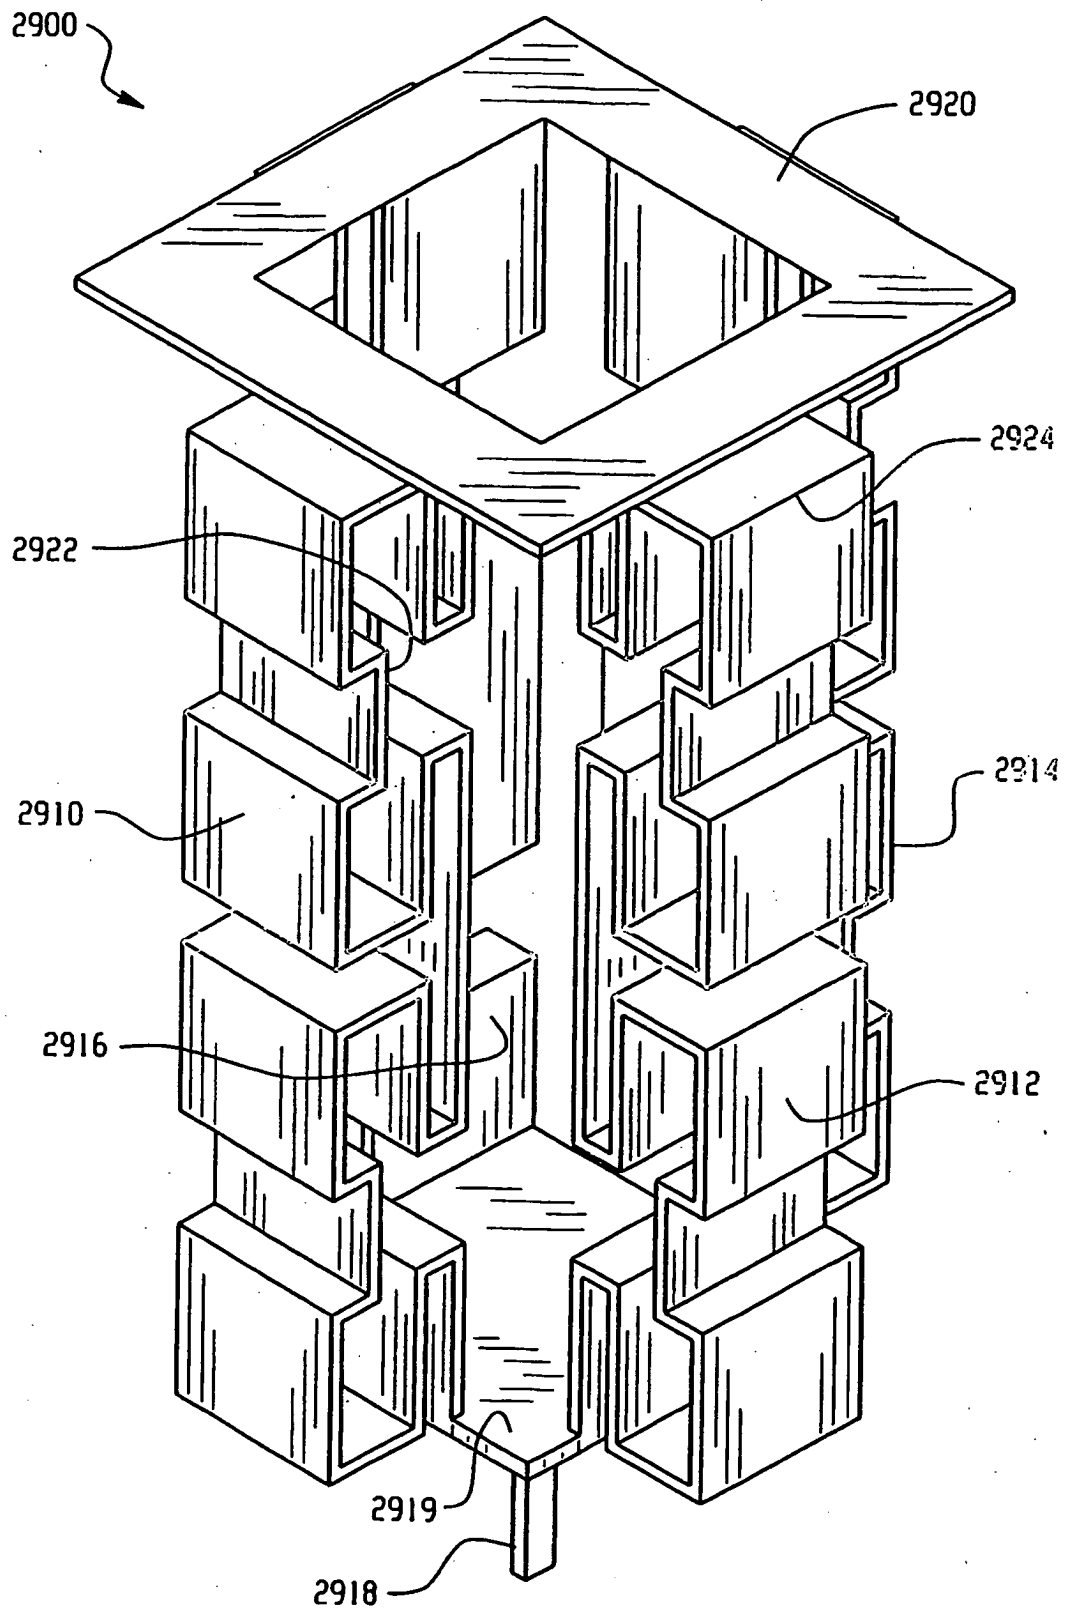

*Fig. 36*



**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- WO 0154225 A [0002]
- JP 2003003022 A [0003]
- WO 0139321 A [0003]
- WO 0206371411 A [0003]
- WO 2004025778 A1 [0003]