





US 20090167612A1

(19) **United States**(12) **Patent Application Publication**  
**Baliarda et al.**(10) **Pub. No.: US 2009/0167612 A1**(43) **Pub. Date: Jul. 2, 2009**(54) **MINIATURE ANTENNA HAVING A  
VOLUMETRIC STRUCTURE**continuation of application No. PCT/EP2003/001695,  
filed on Feb. 19, 2003.(76) Inventors: **Carles Puente Baliarda**, Barcelona  
(ES); **Jordi Soler-Castany**,  
Barcelona (ES); **Juan Ignacio**  
**Ortigosa-Vallejo**, Barcelona (ES);  
**Jaume Anguera-Pros**, Castellon  
(ES)**Publication Classification**(51) **Int. Cl.**  
**H01Q 1/38** (2006.01)  
(52) **U.S. Cl.** ..... **343/700 MS**  
(57) **ABSTRACT**Correspondence Address:  
**WINSTEAD PC**  
**P.O. BOX 50784**  
**DALLAS, TX 75201 (US)**(21) Appl. No.: **12/364,066**(22) Filed: **Feb. 2, 2009****Related U.S. Application Data**(63) Continuation of application No. 11/202,881, filed on  
Aug. 12, 2005, now Pat. No. 7,504,997, which is a

A miniature antenna includes a radiating arm that defines a grid dimension curve. In one embodiment, the radiating arm includes a planar portion and at least one extruded portion. The planar portion of the radiating arm defines the grid dimension curve. The extruded portion of the radiating arm extends from the planar portion of the radiating arm to define a three-dimensional structure. In one embodiment, the miniature antenna includes a first radiating arm that defines a first grid dimension curve within a first plane and a second radiating arm that defines a second grid dimension curve within a second plane. In one embodiment, the miniature antenna includes a radiating arm that forms a non-planar structure.

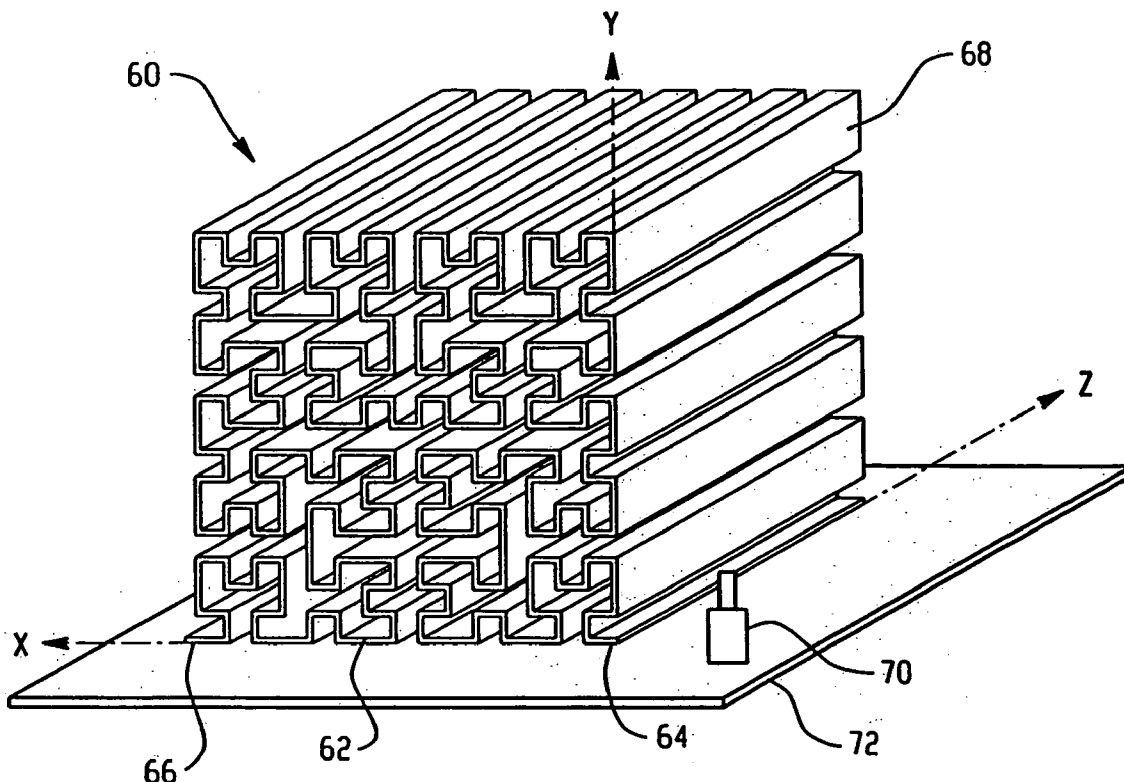

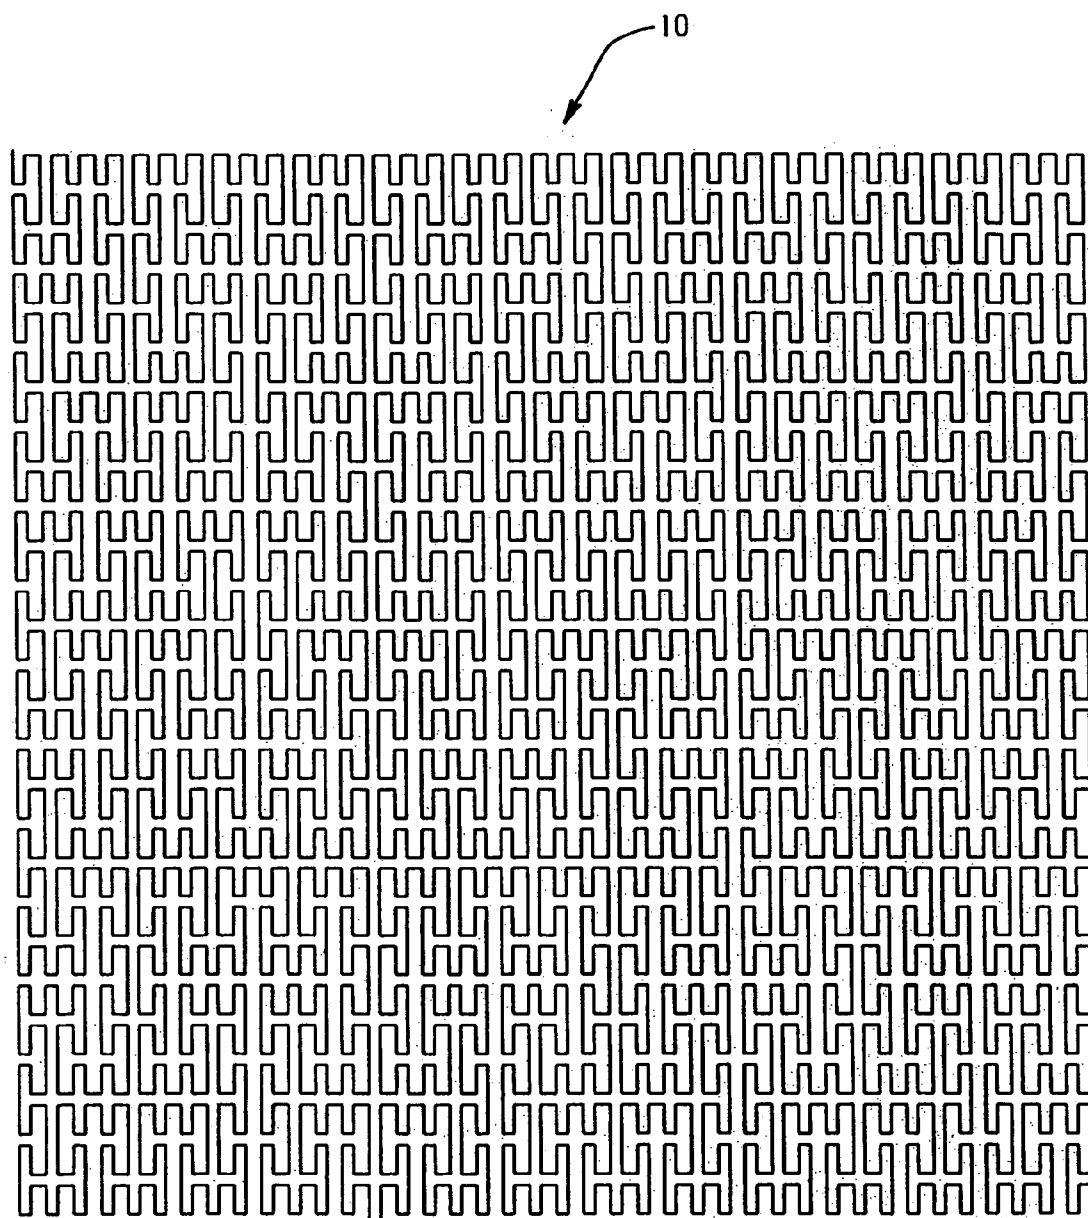

*Fig. 1*  
PRIOR ART

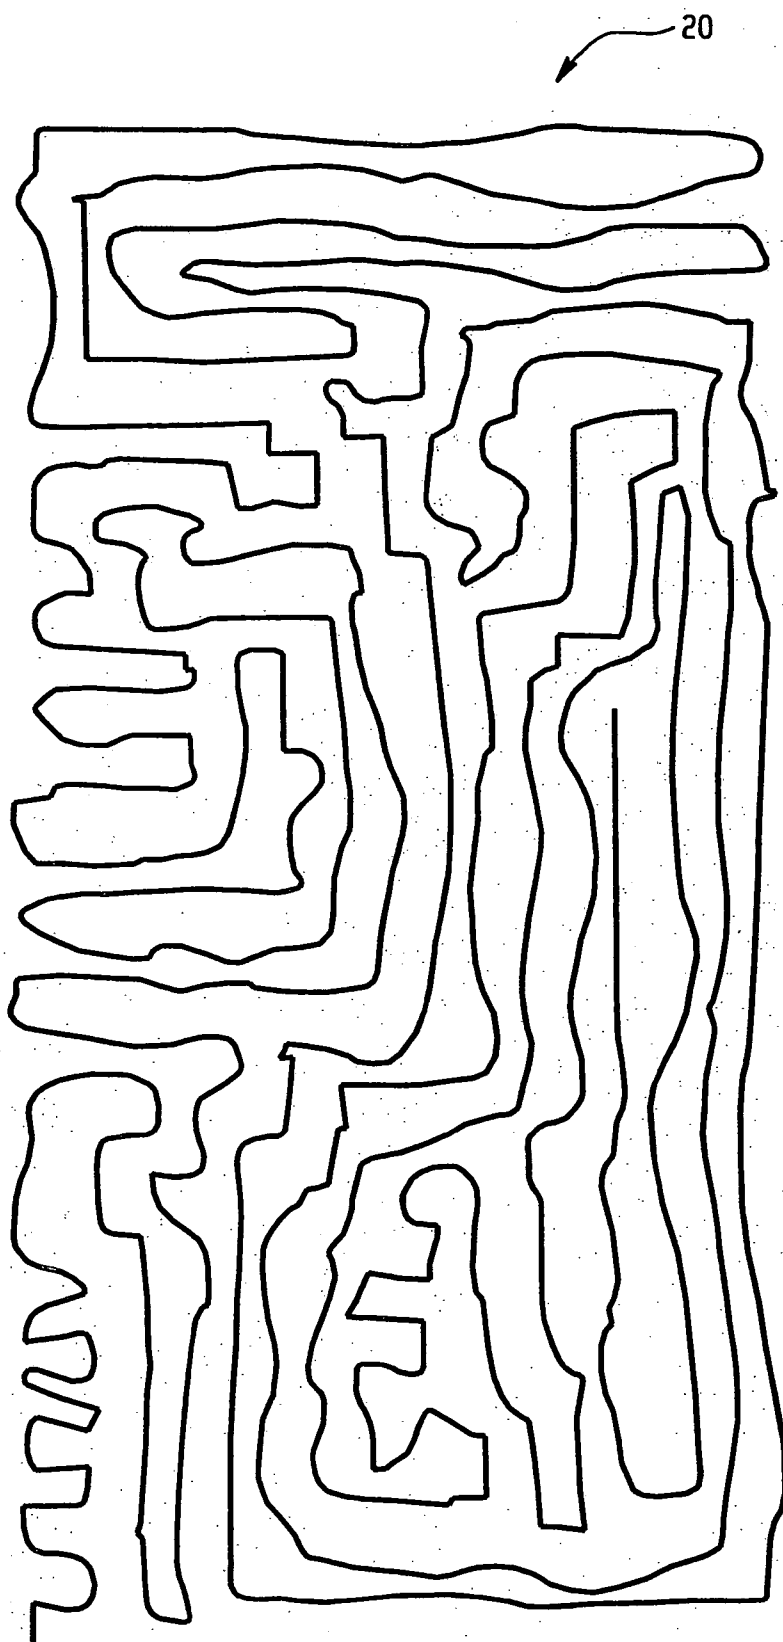
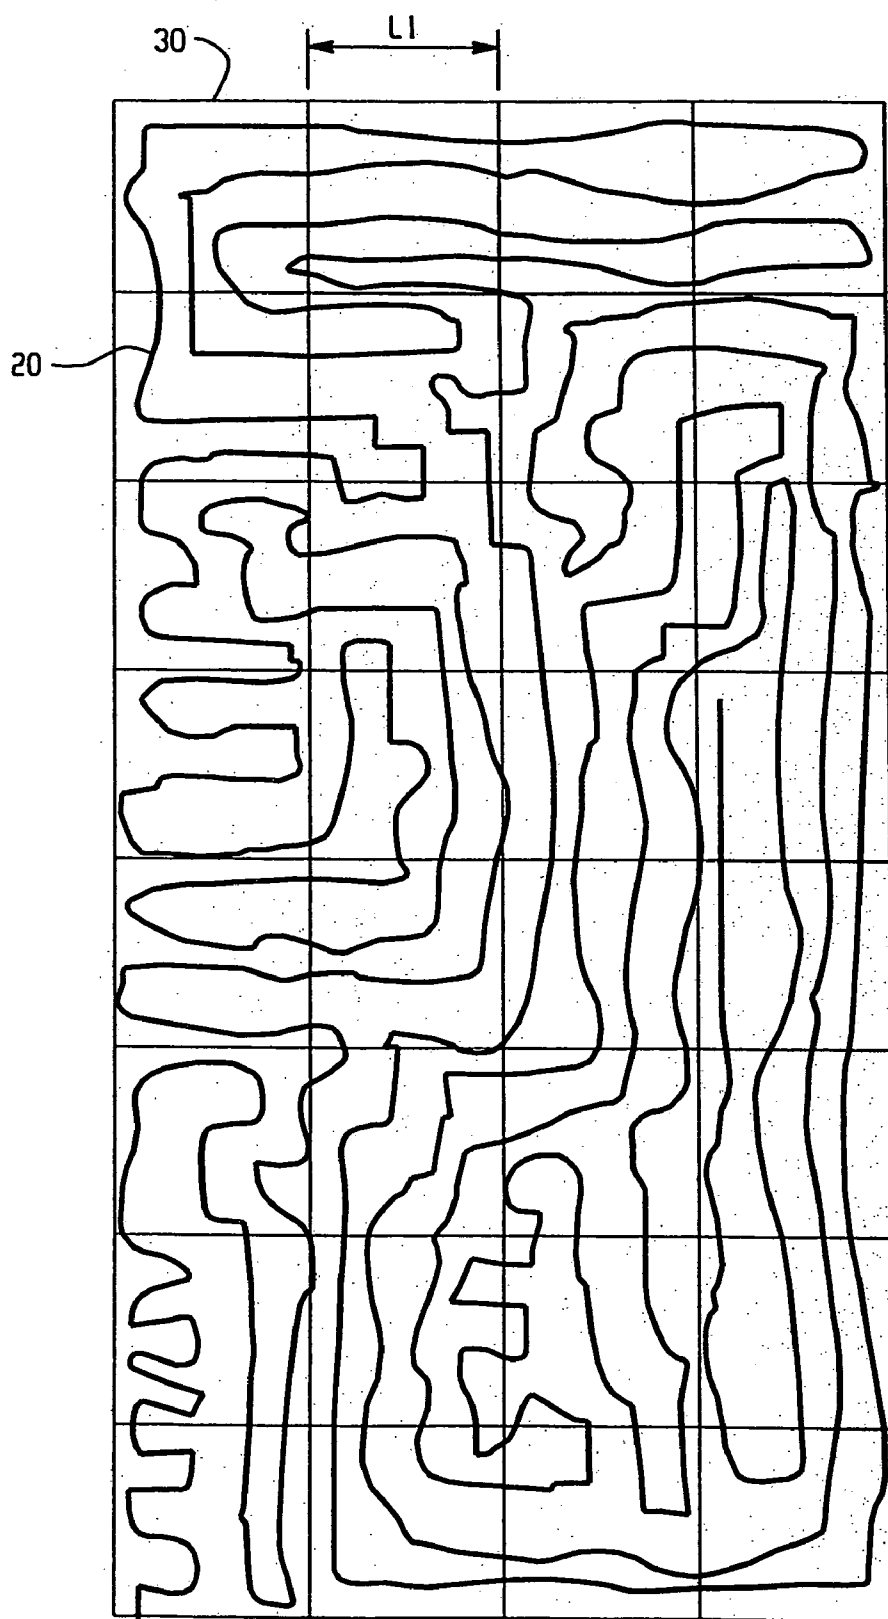


Fig. 2

*Fig. 3*

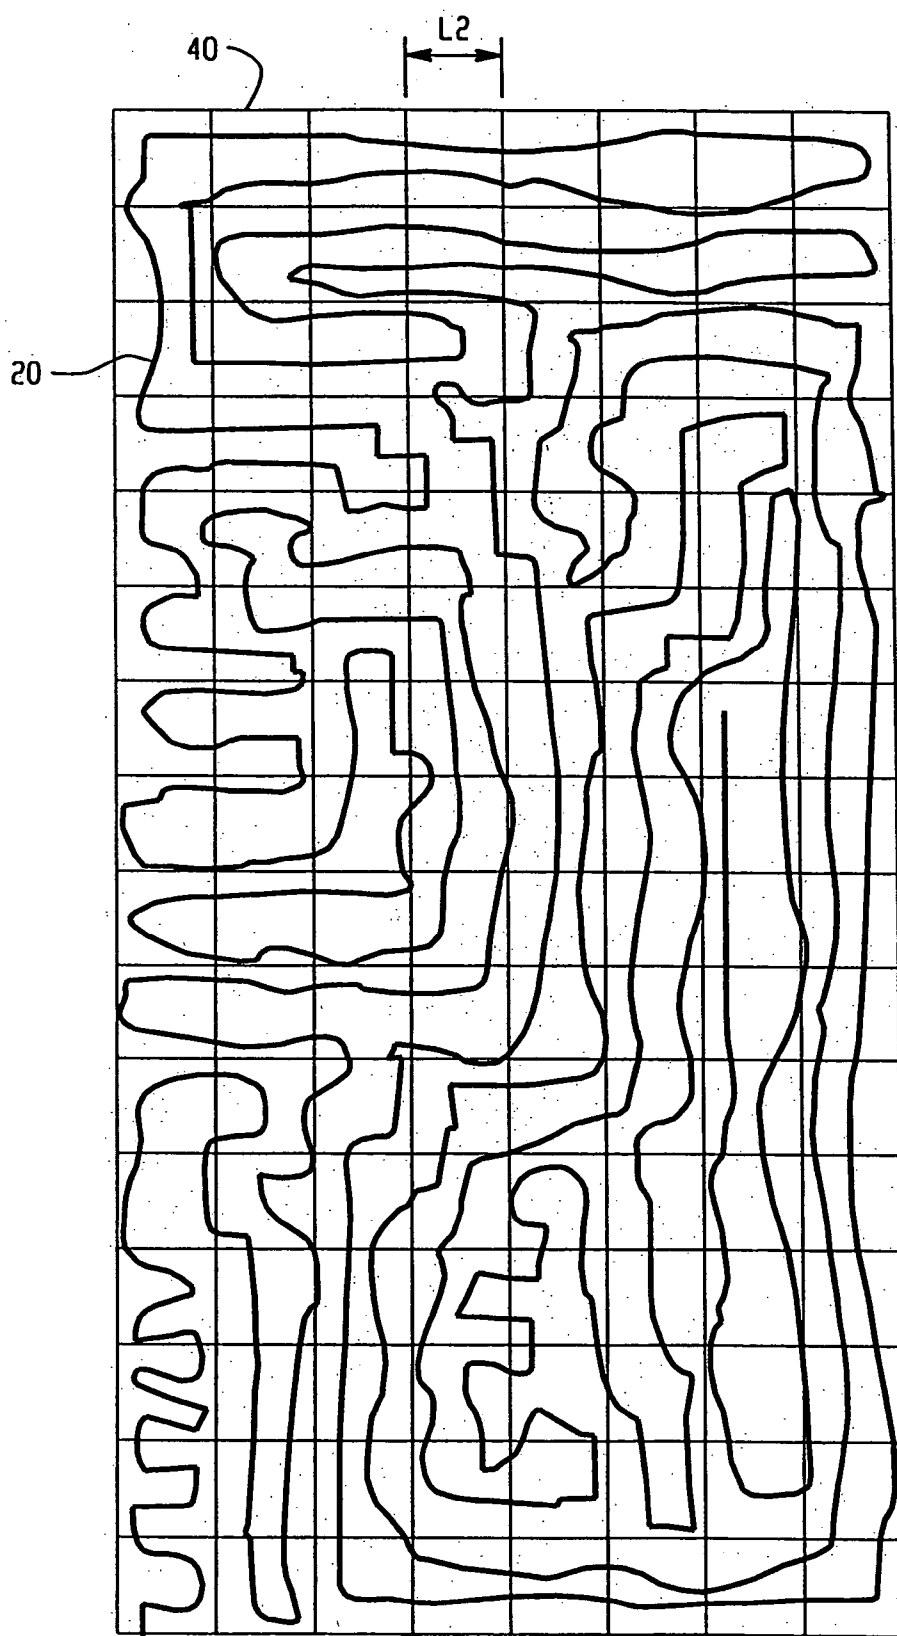


Fig. 4

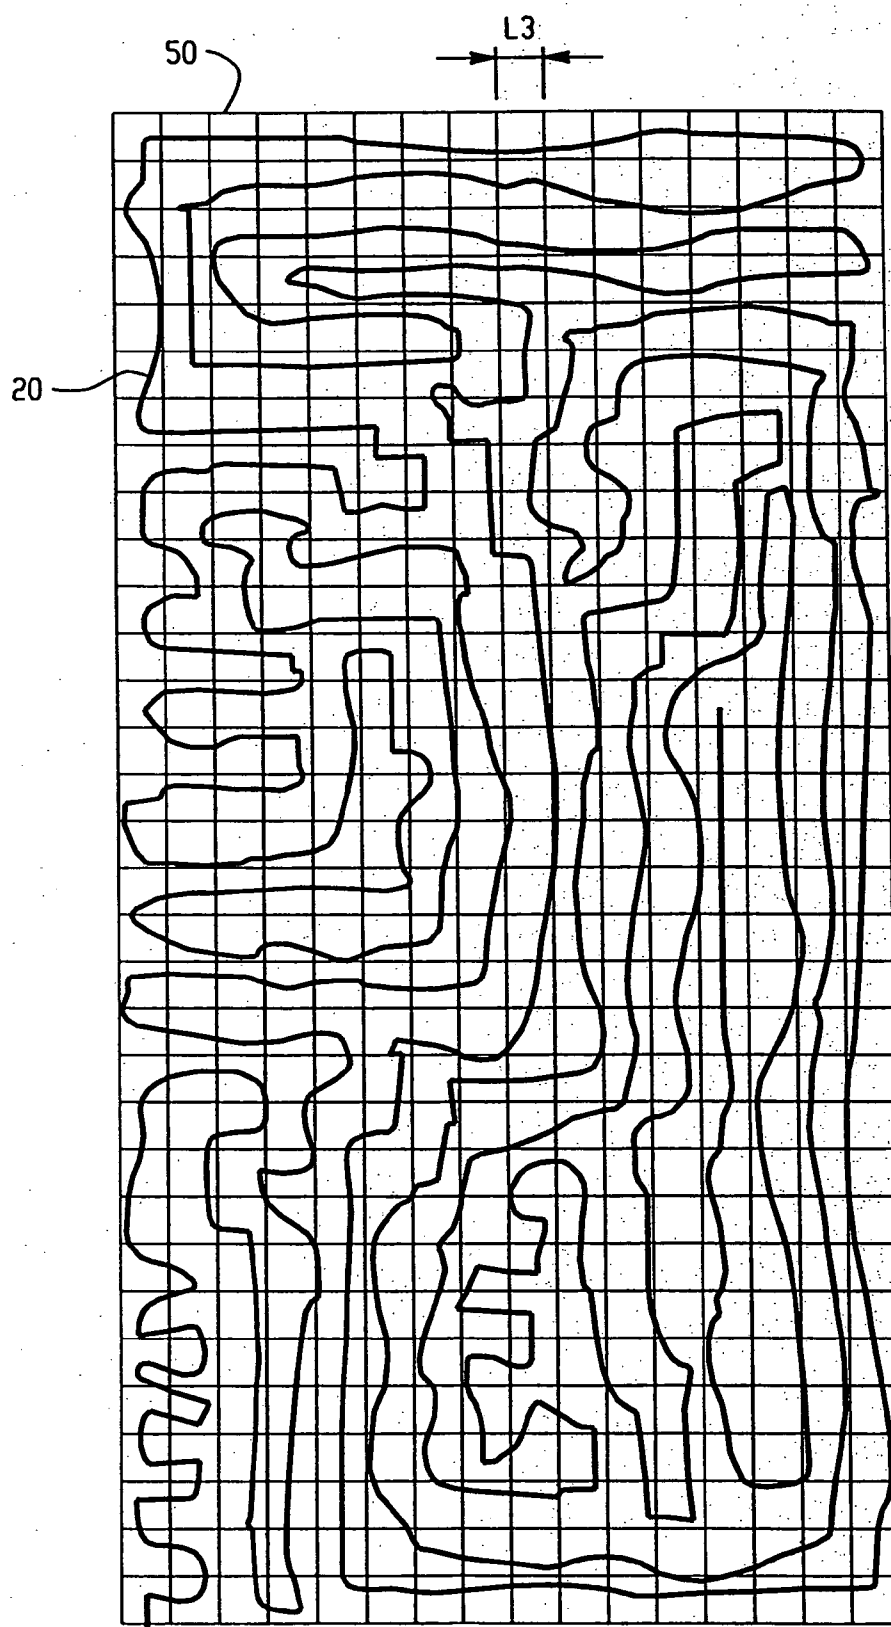


Fig. 5

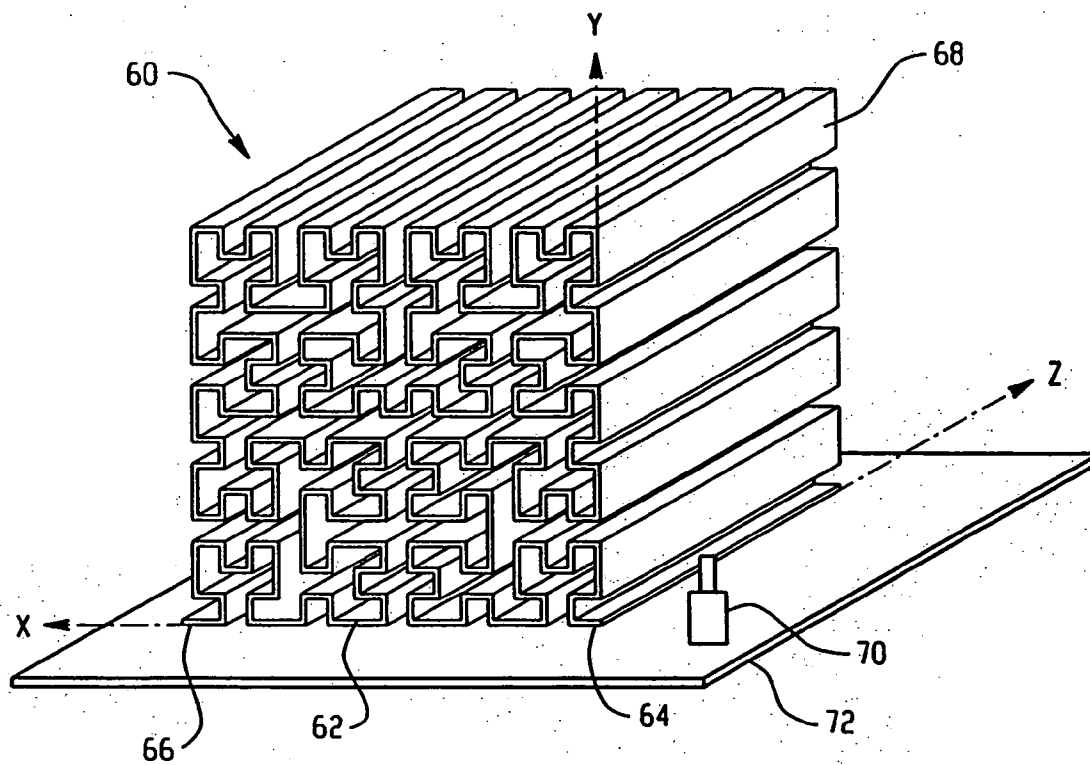


Fig. 6

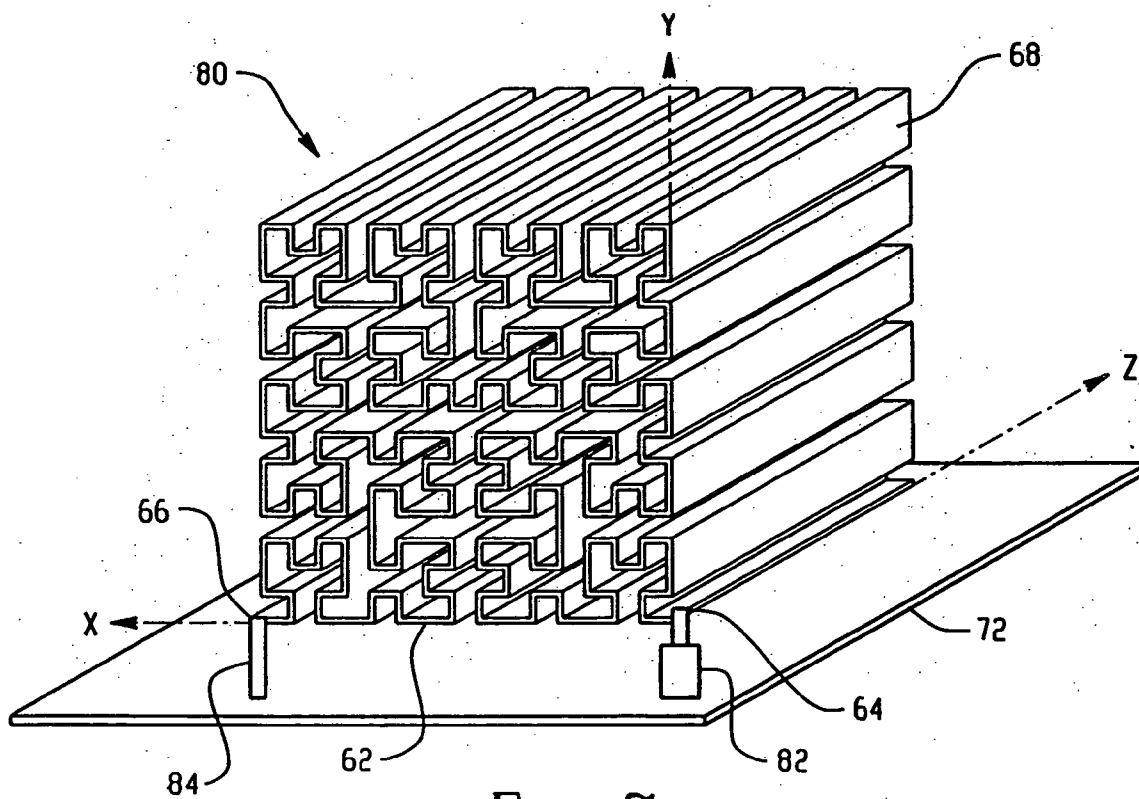
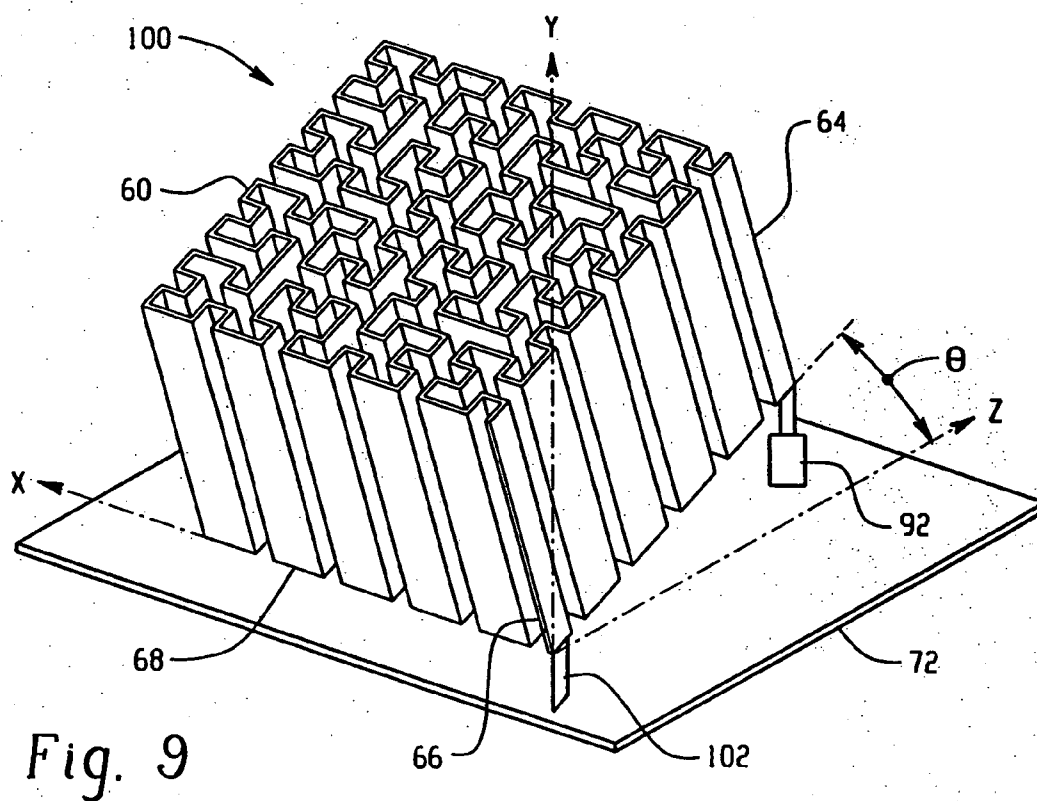
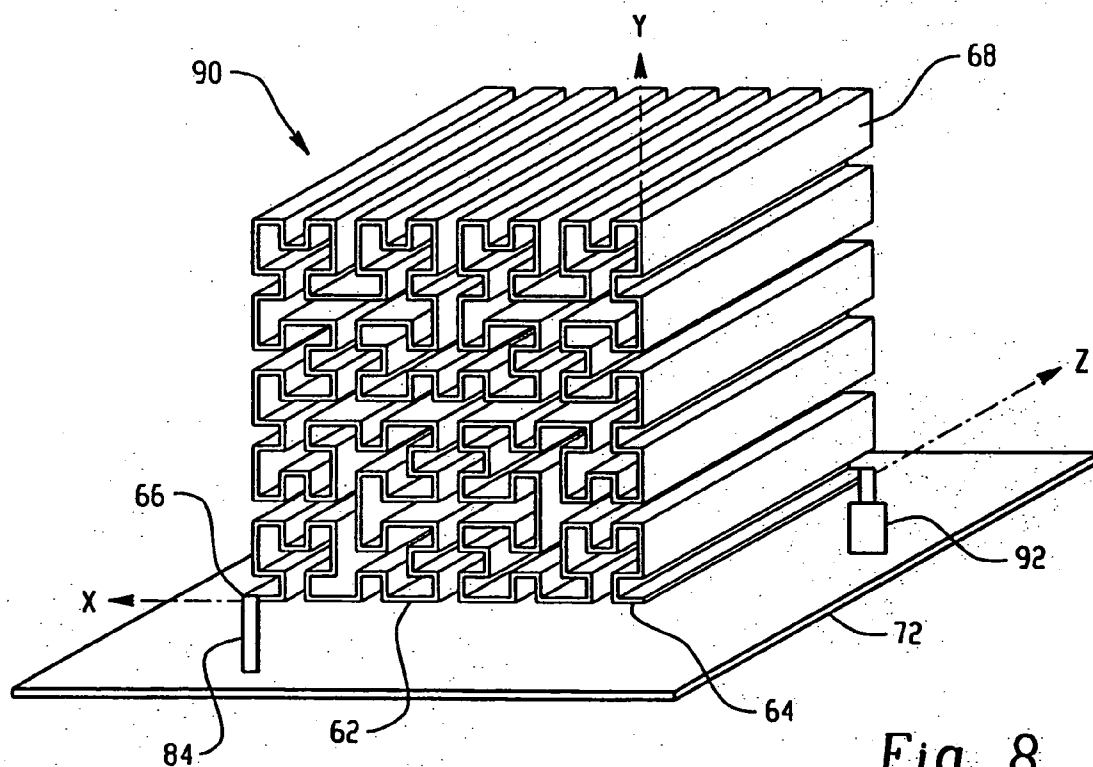


Fig. 7





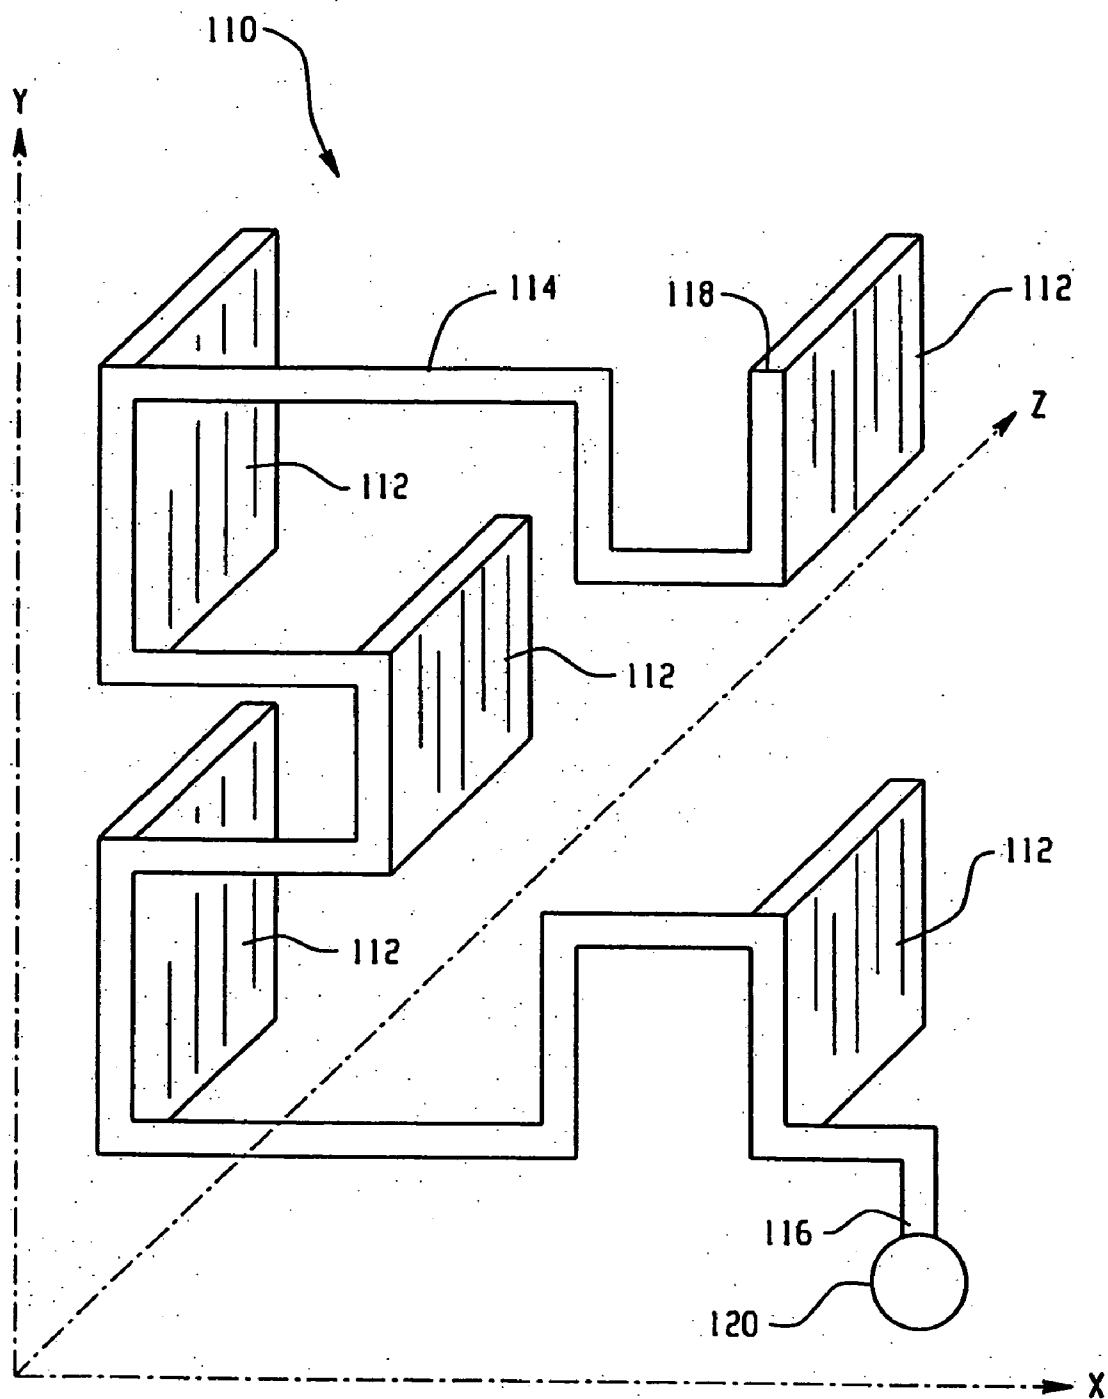


Fig. 10

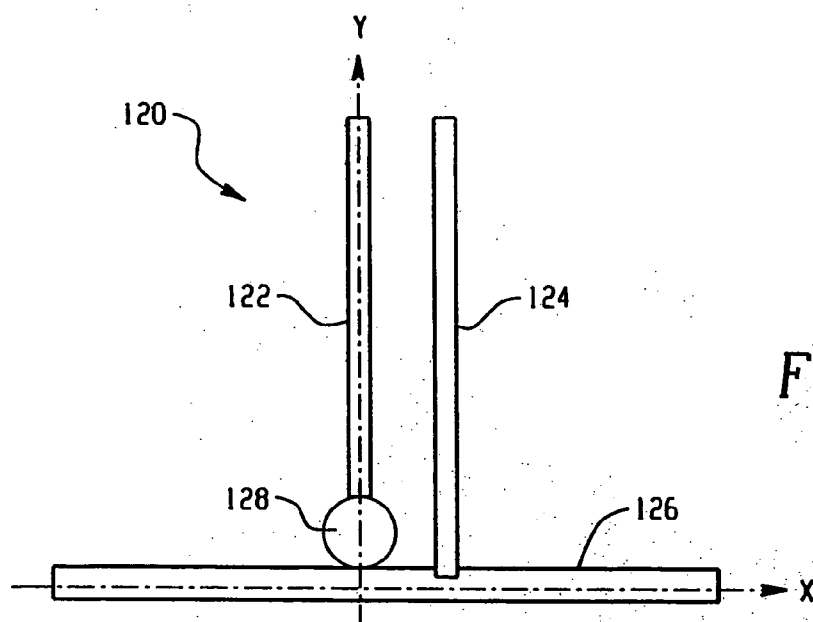


Fig. 11A

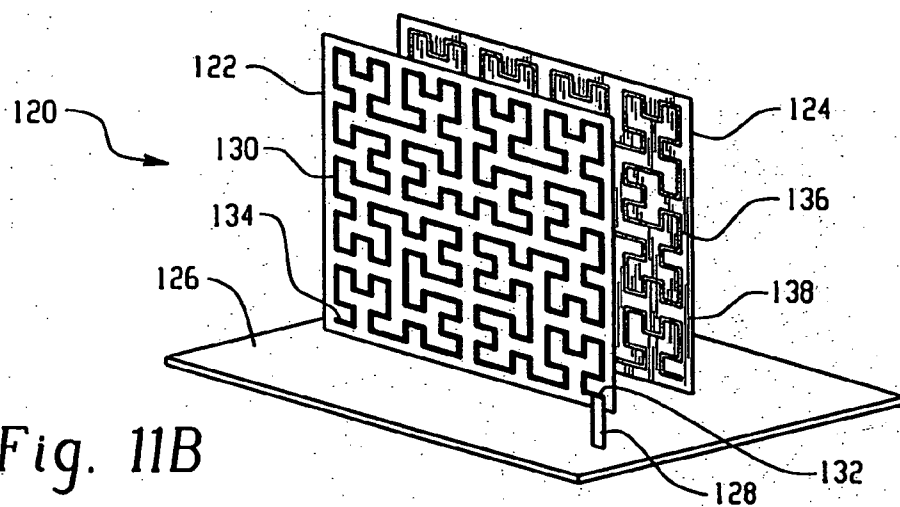


Fig. 11B

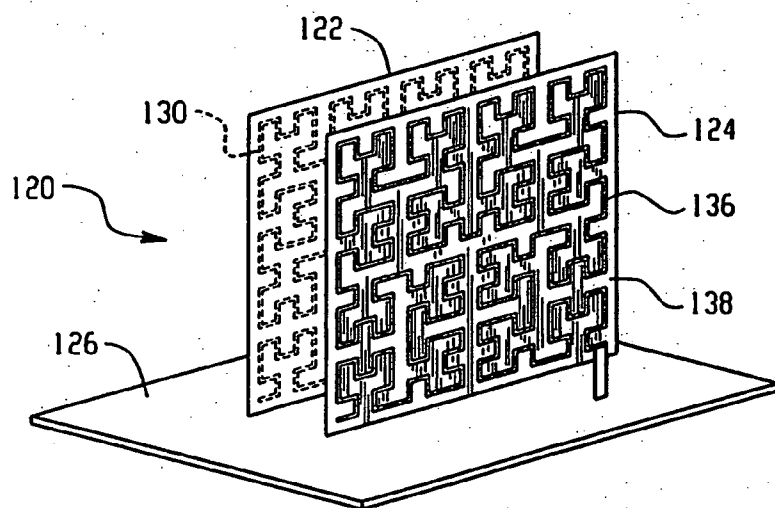


Fig. 11C

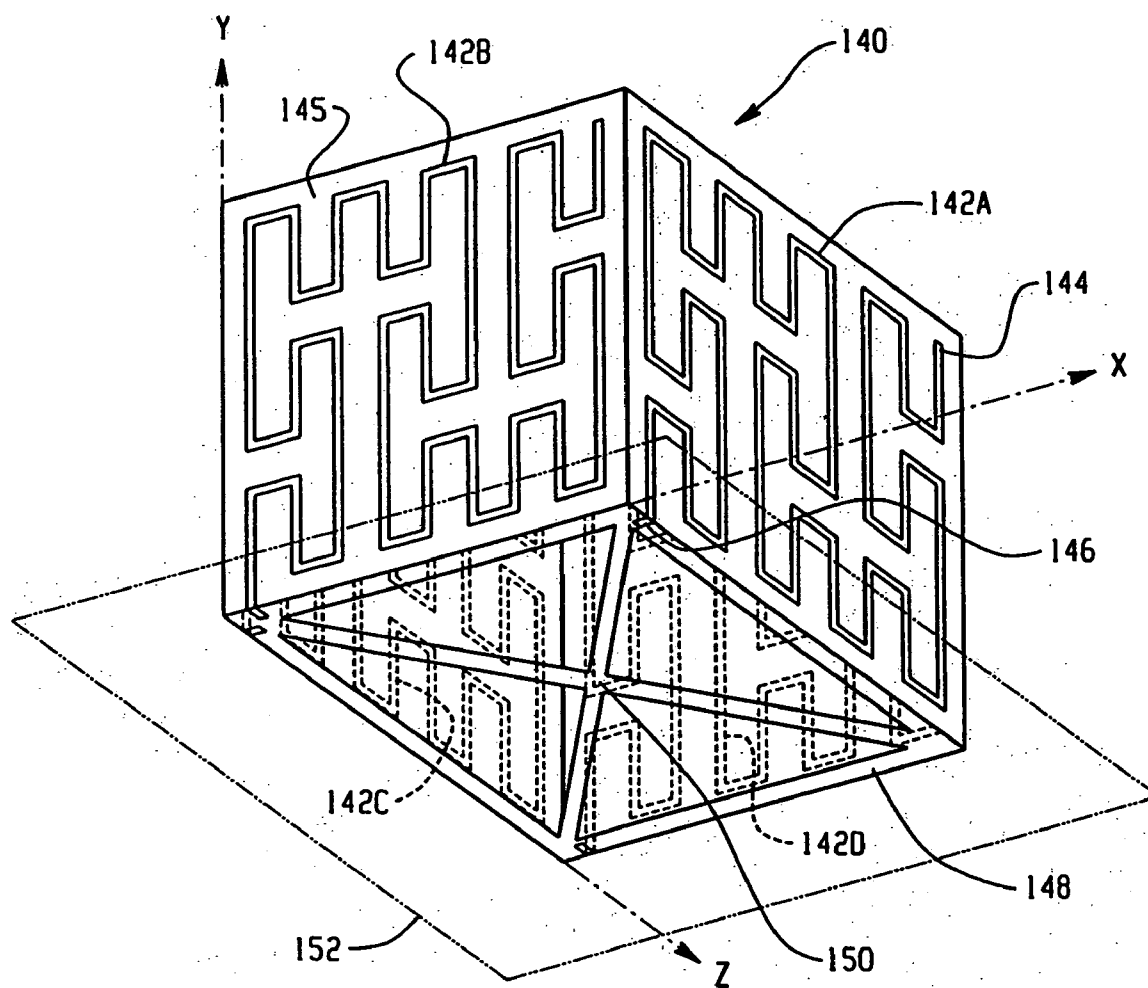


Fig. 12

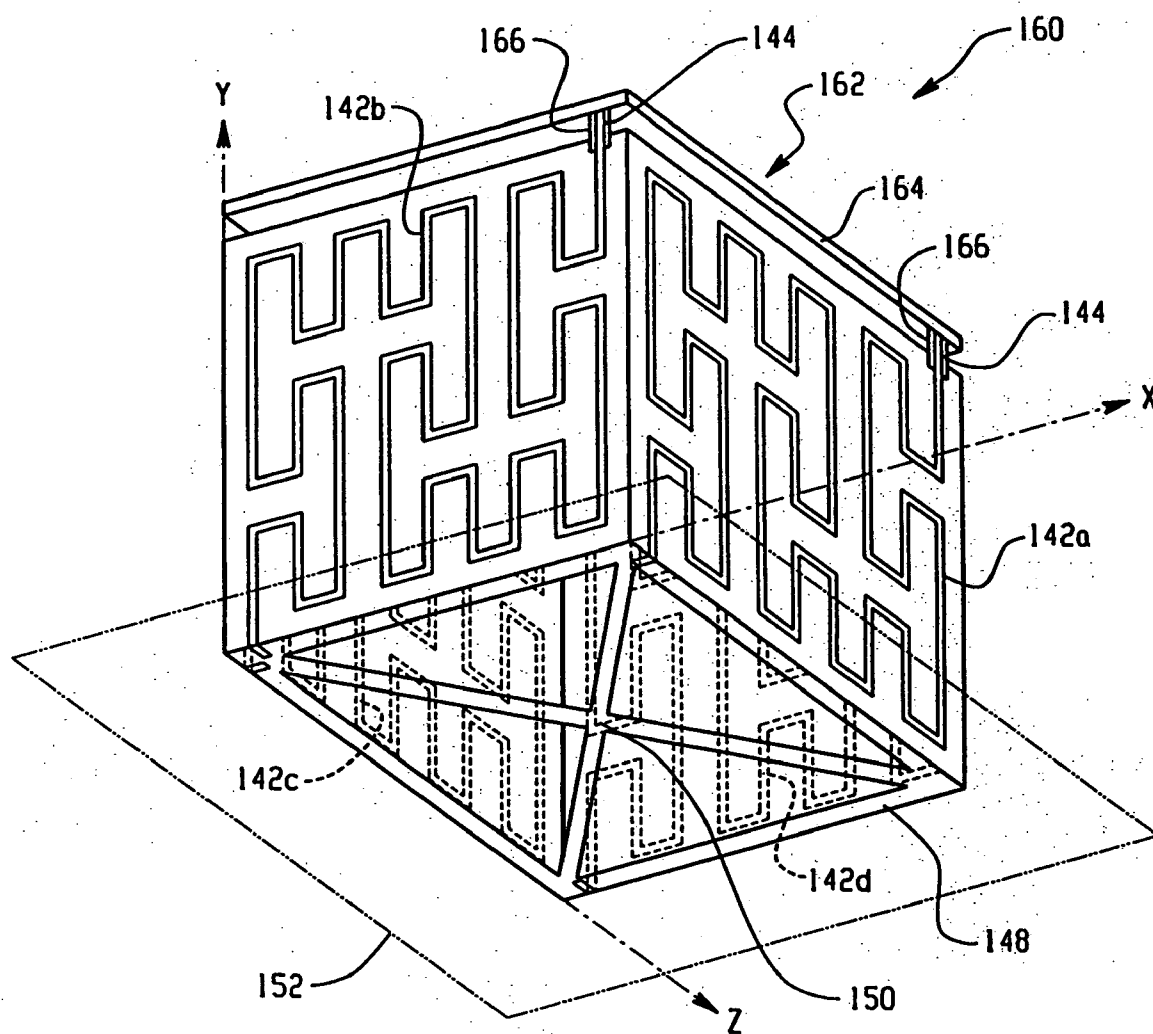
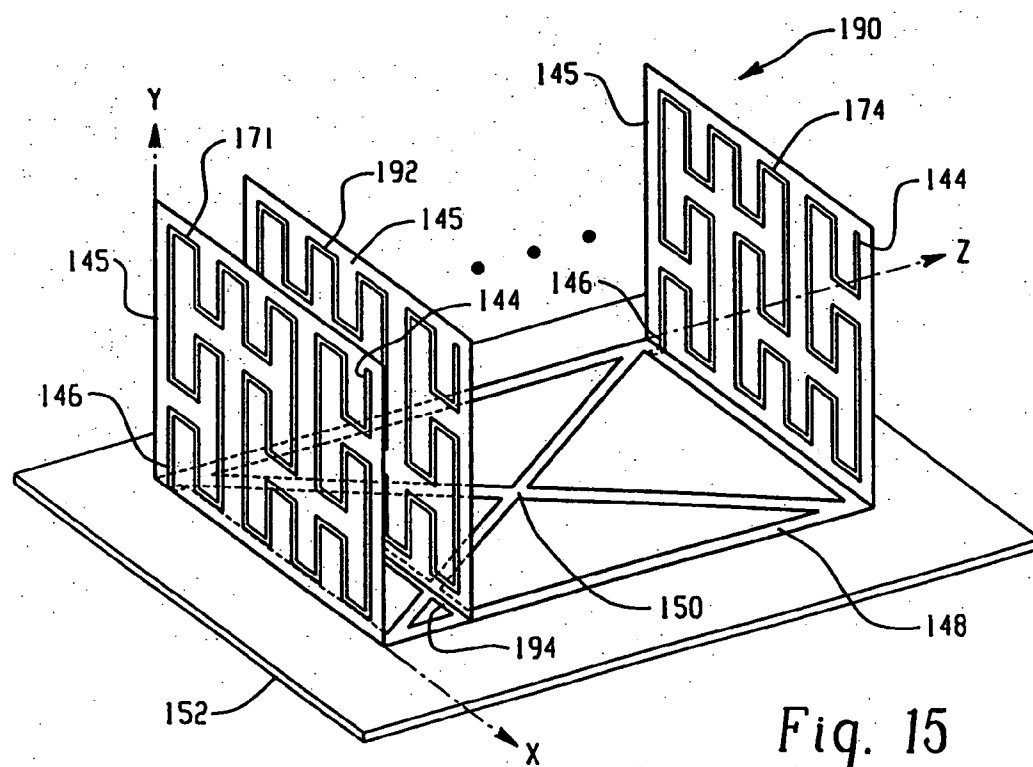
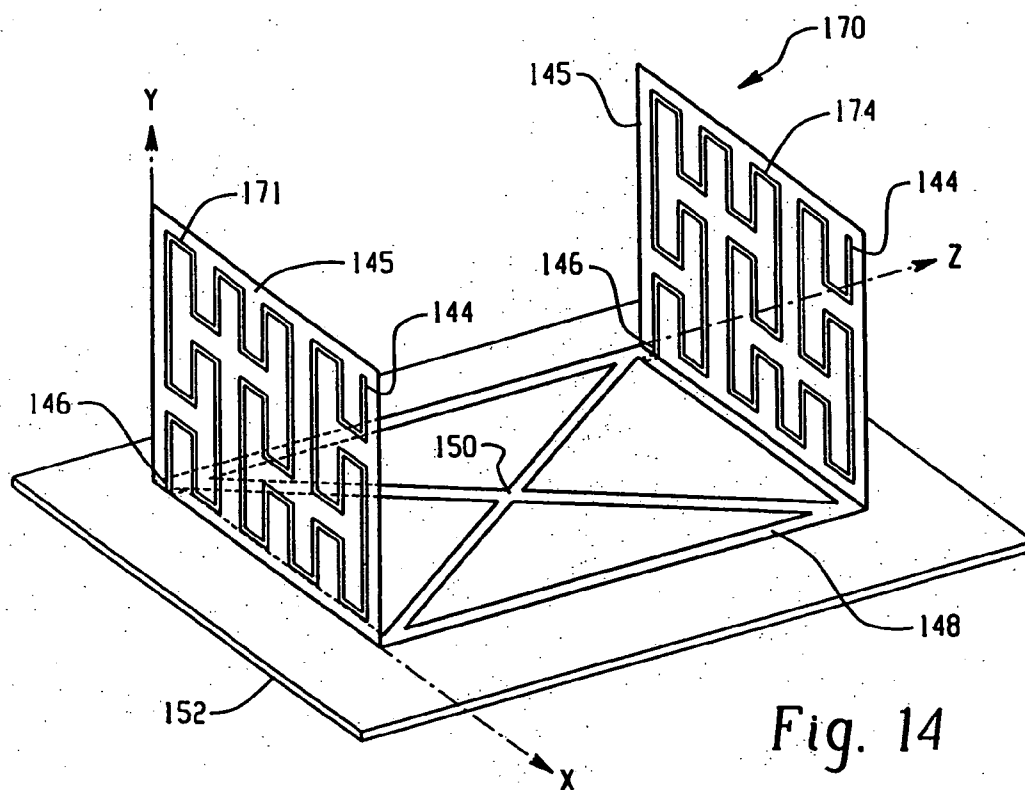


Fig. 13



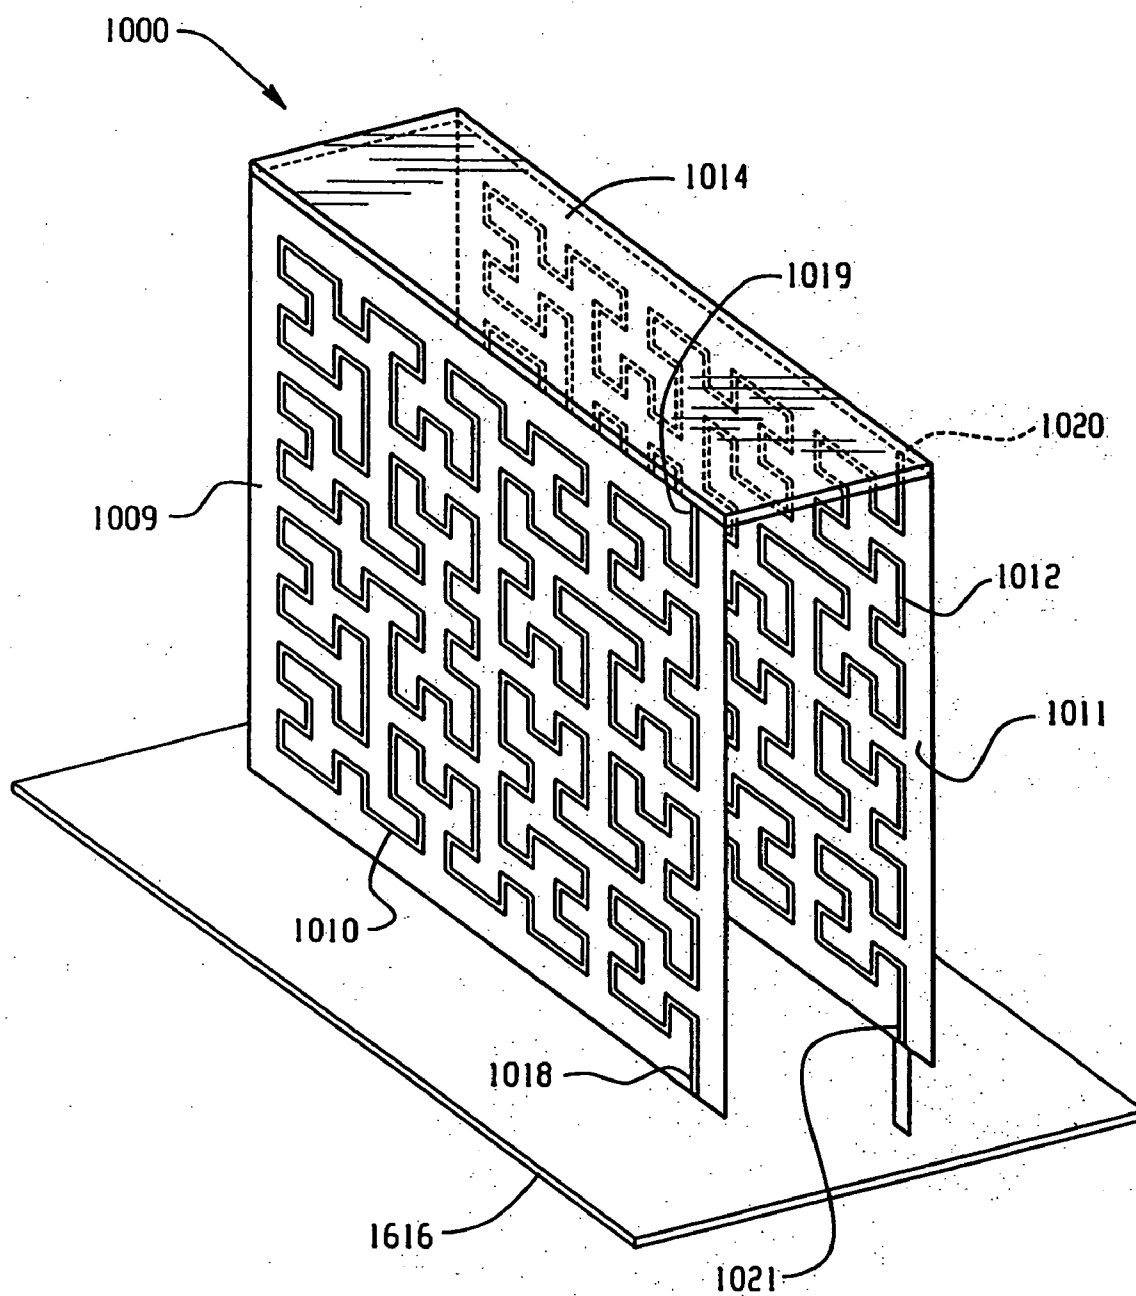
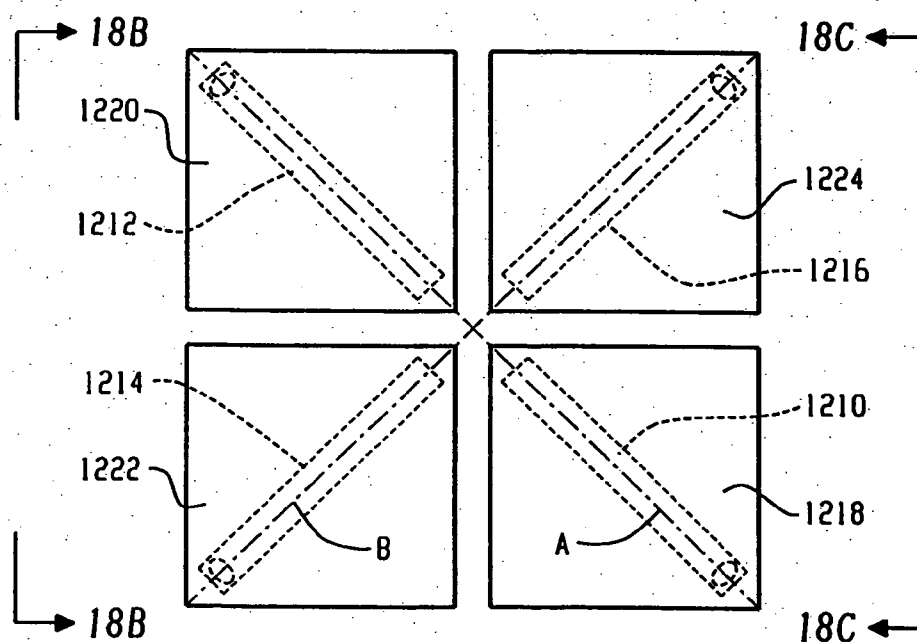
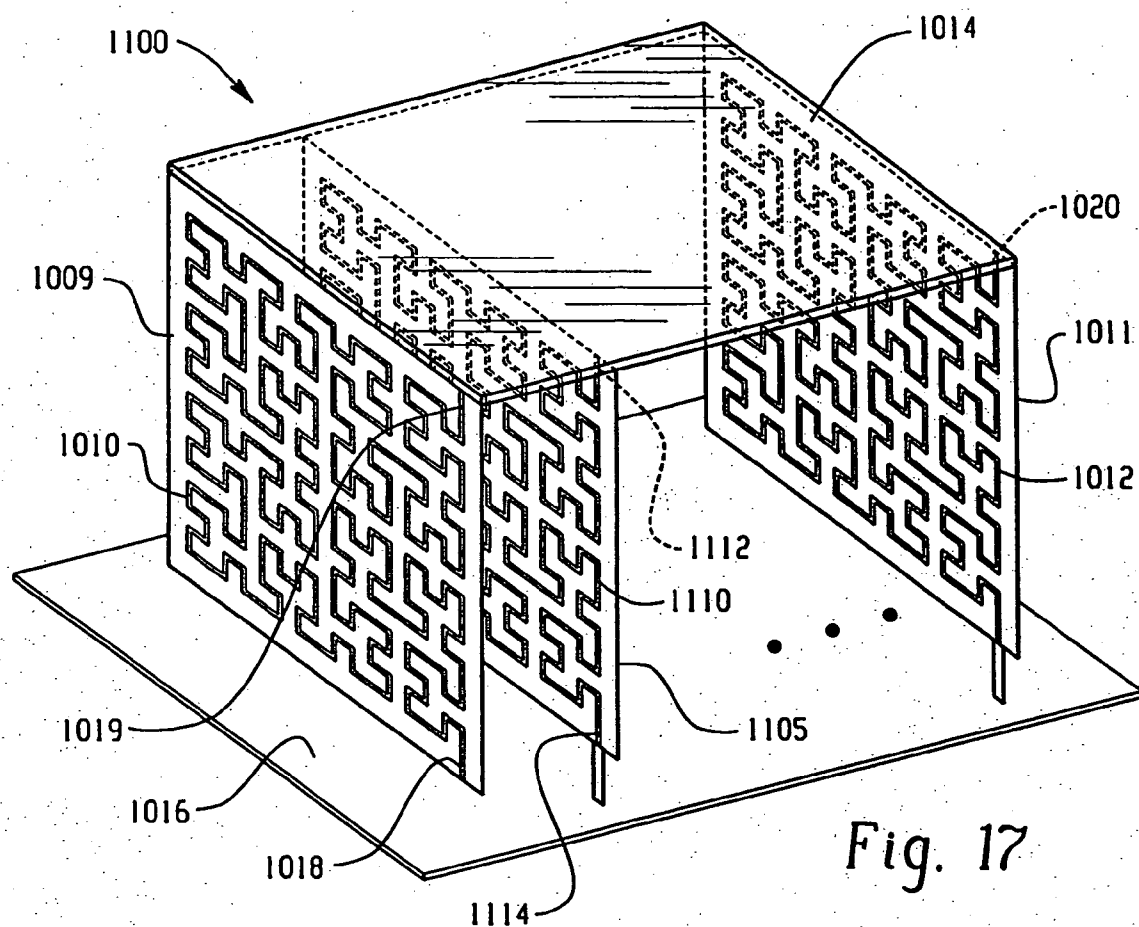


Fig. 16



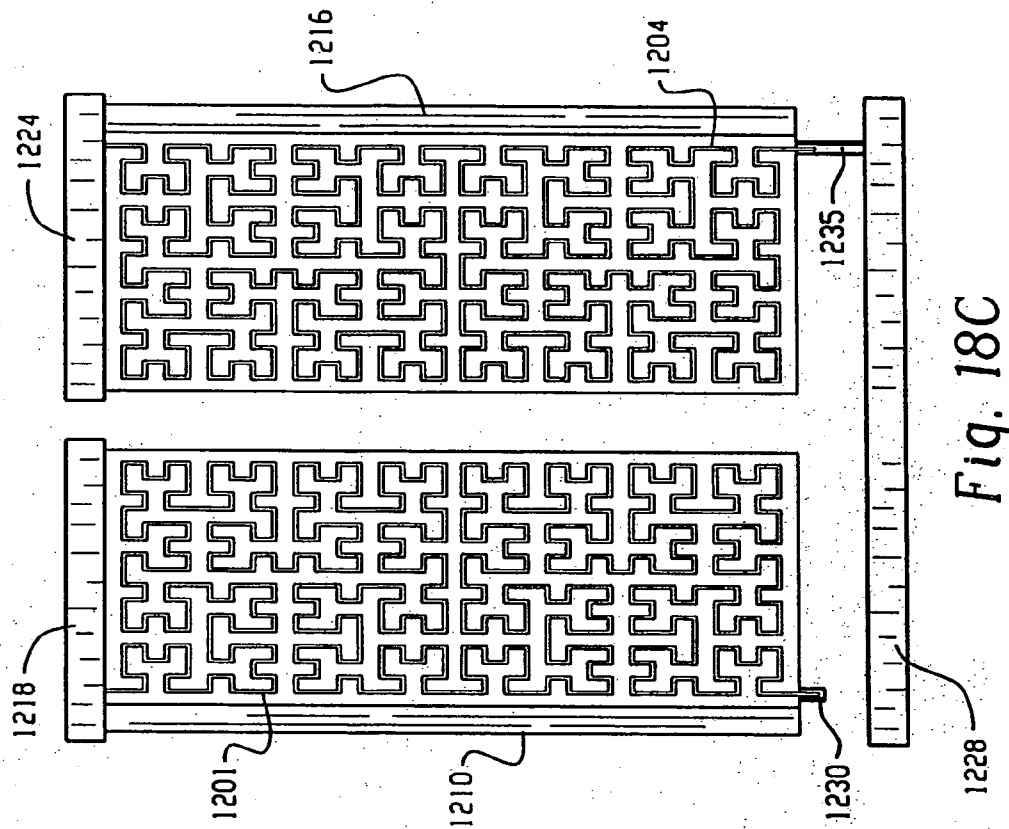


Fig. 18C

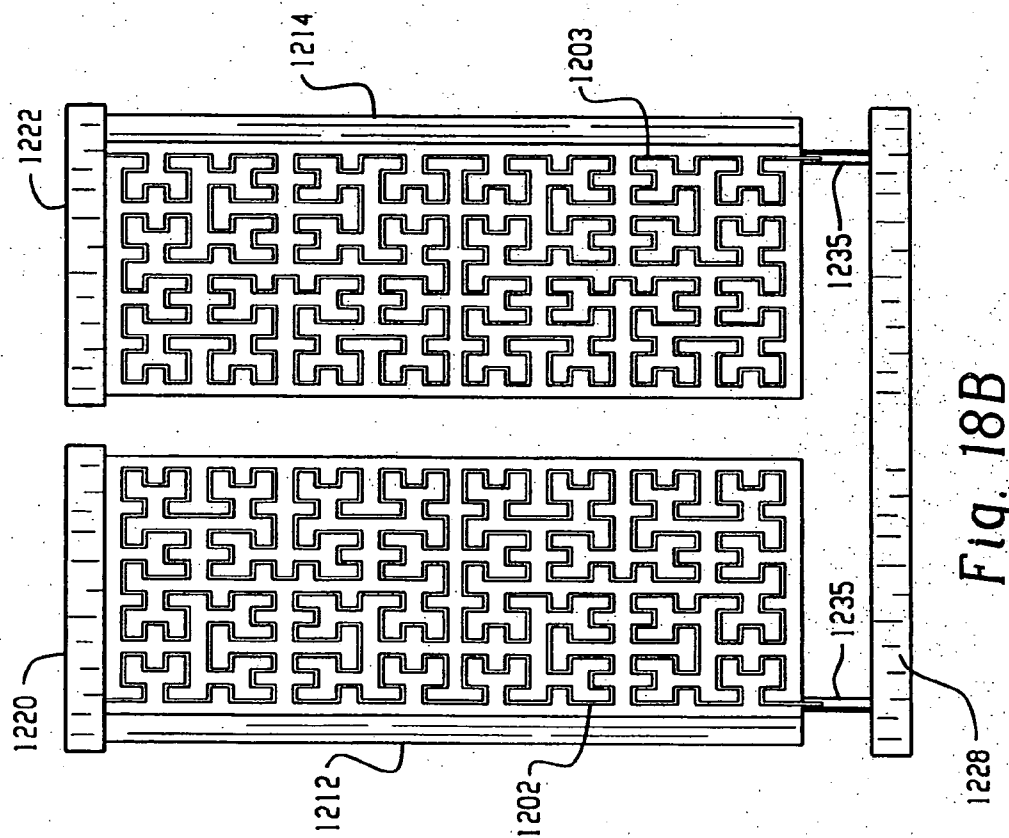


Fig. 18B



Fig. 18E

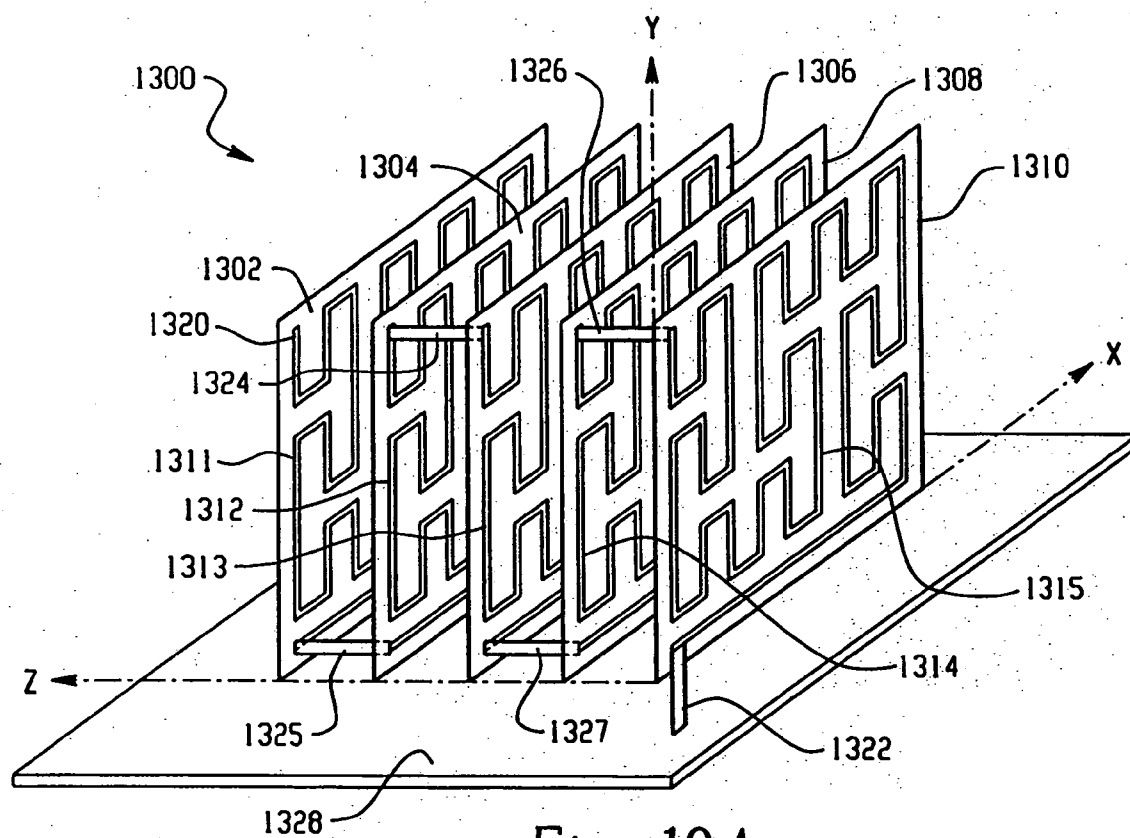


Fig. 19A

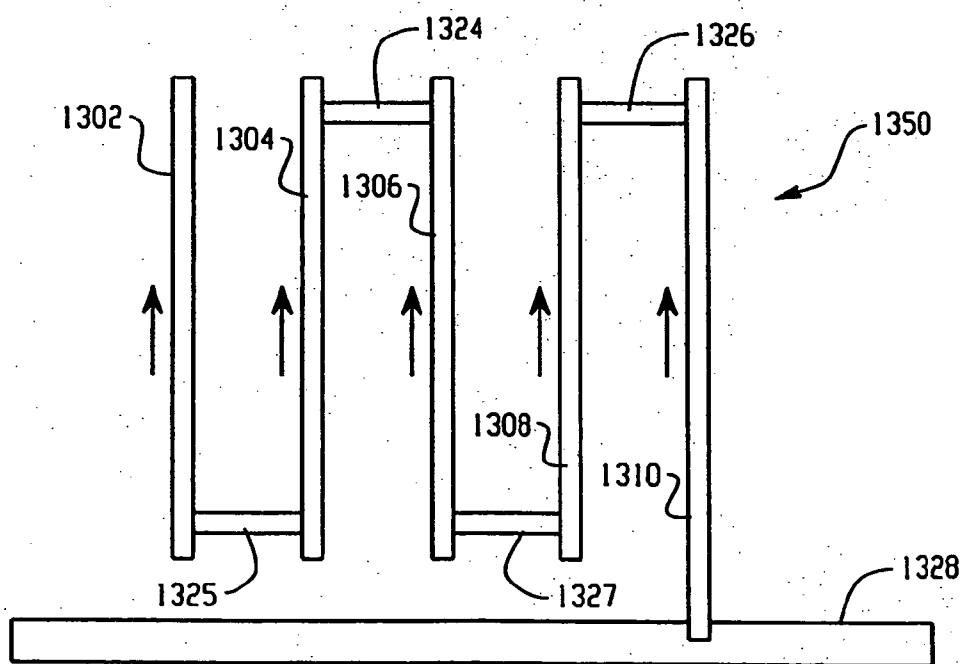
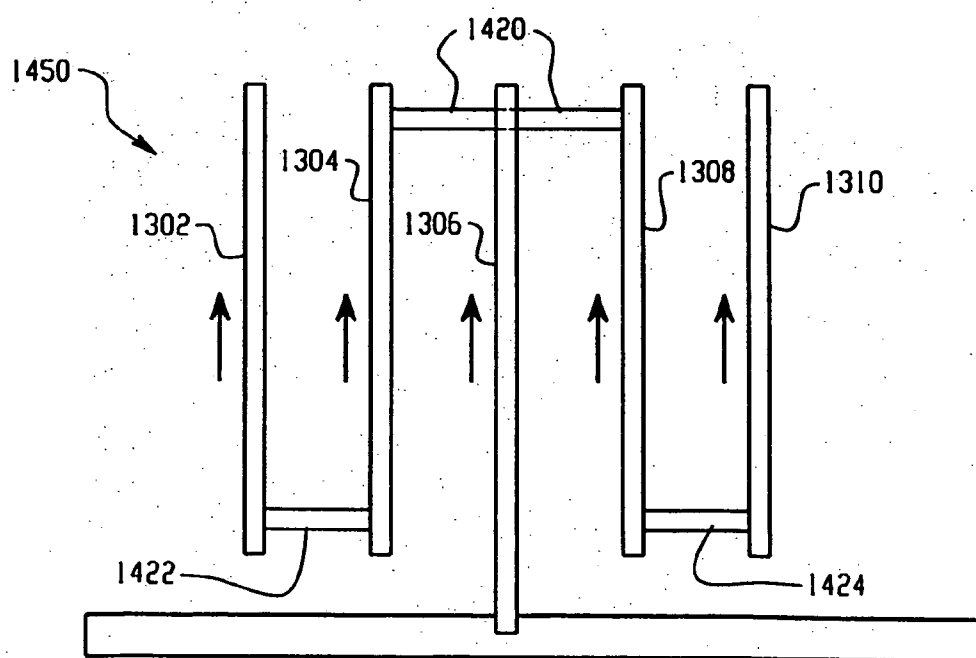
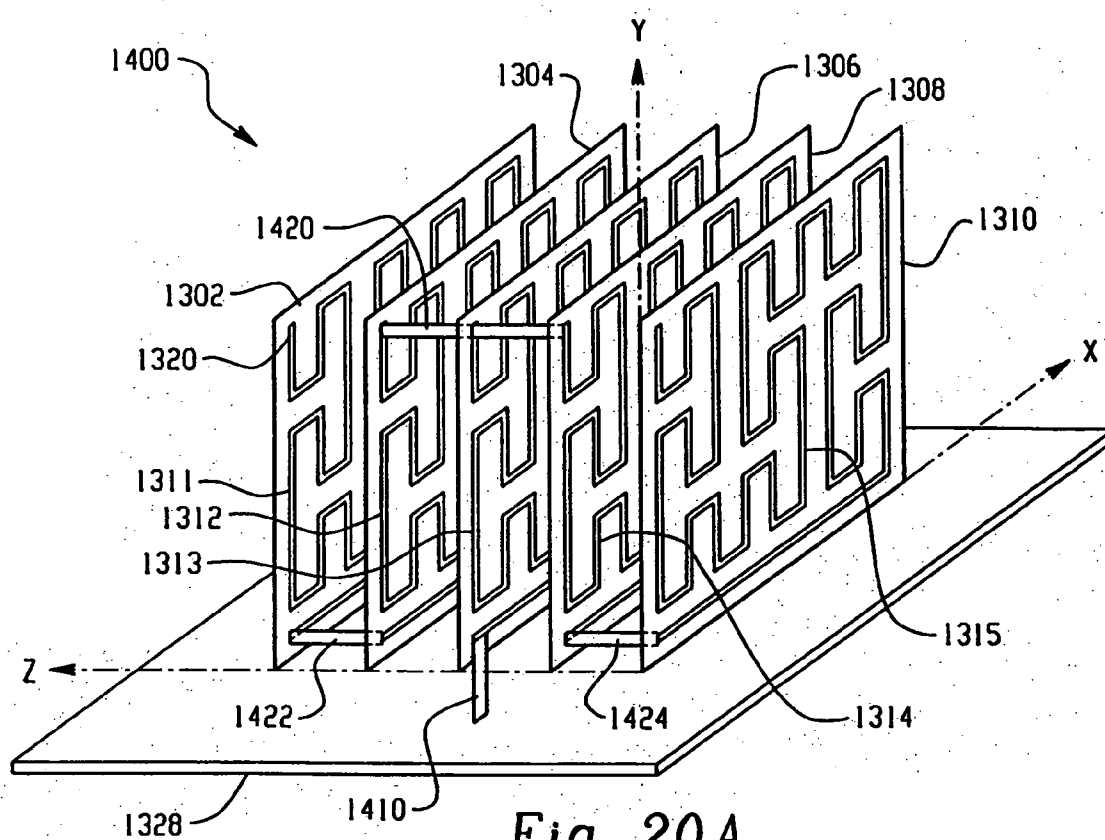
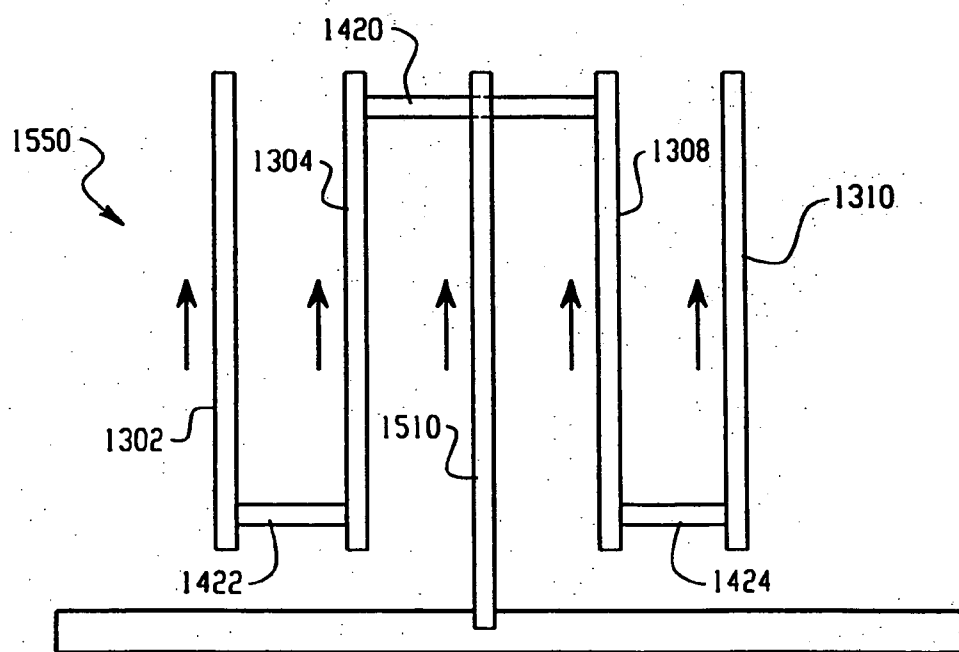
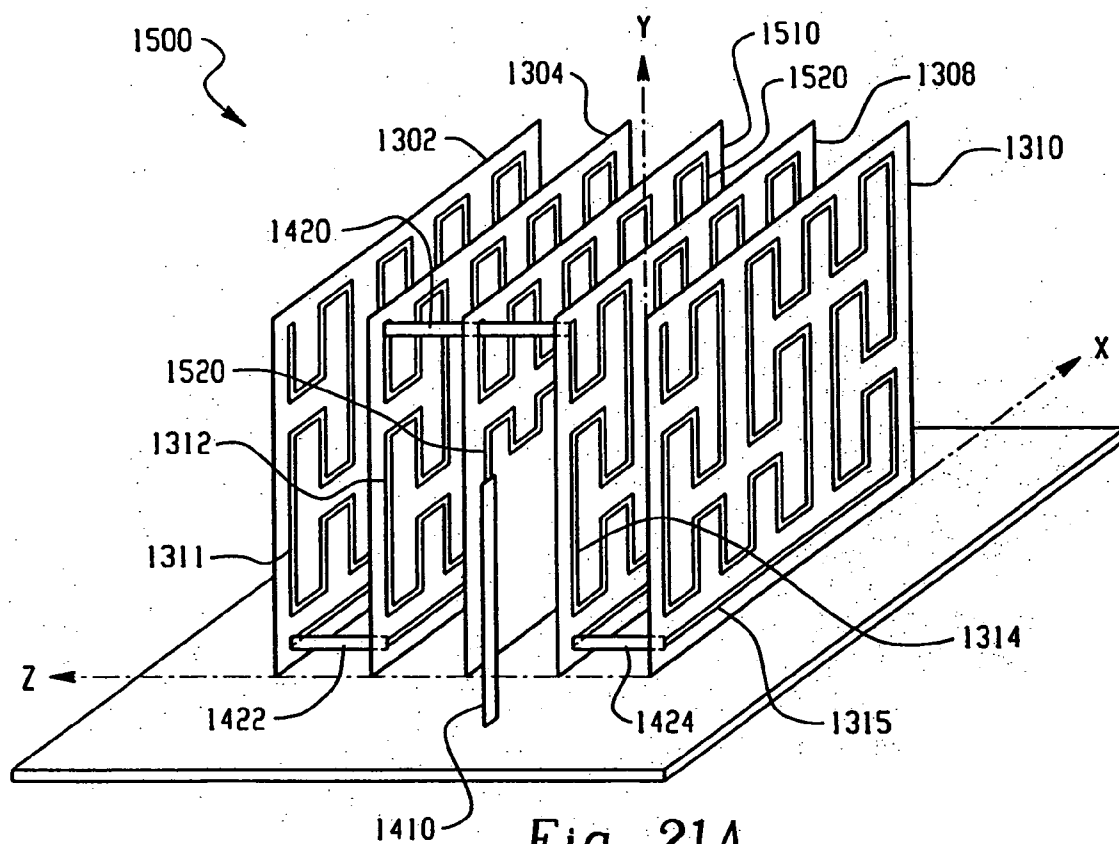


Fig. 19B





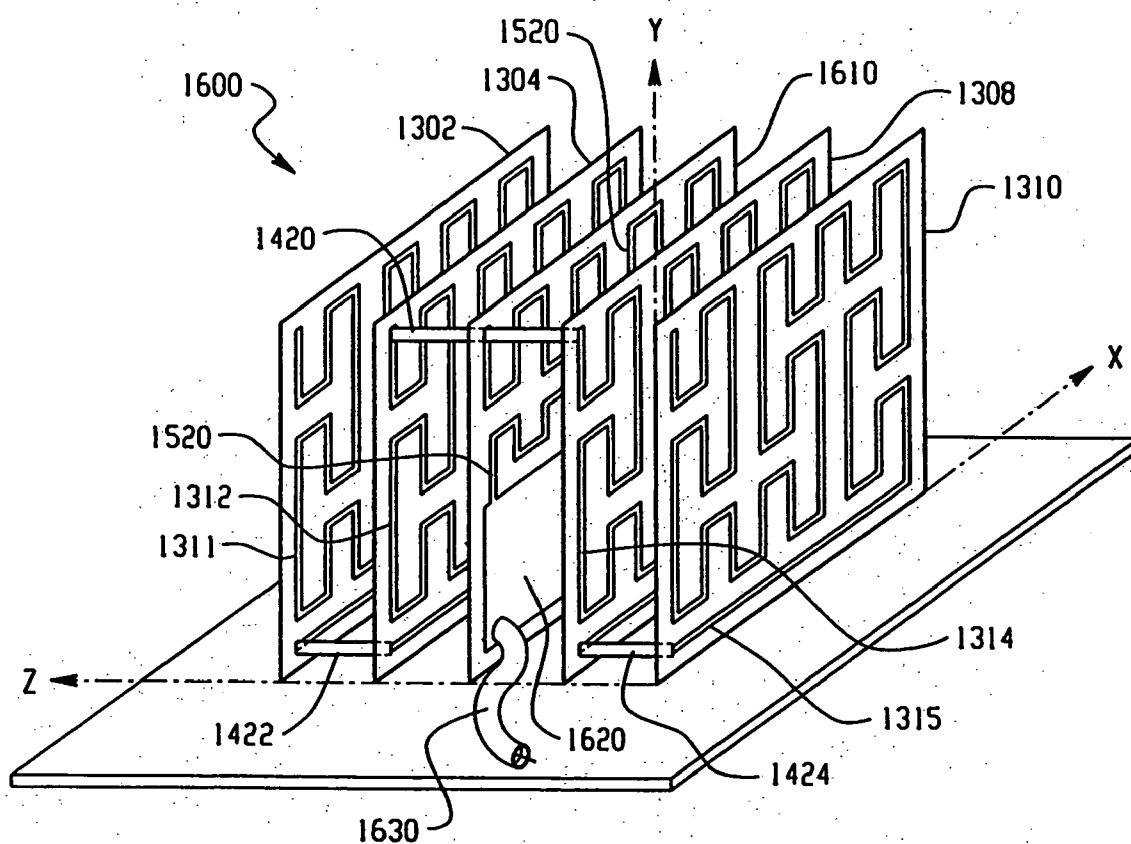


Fig. 22A

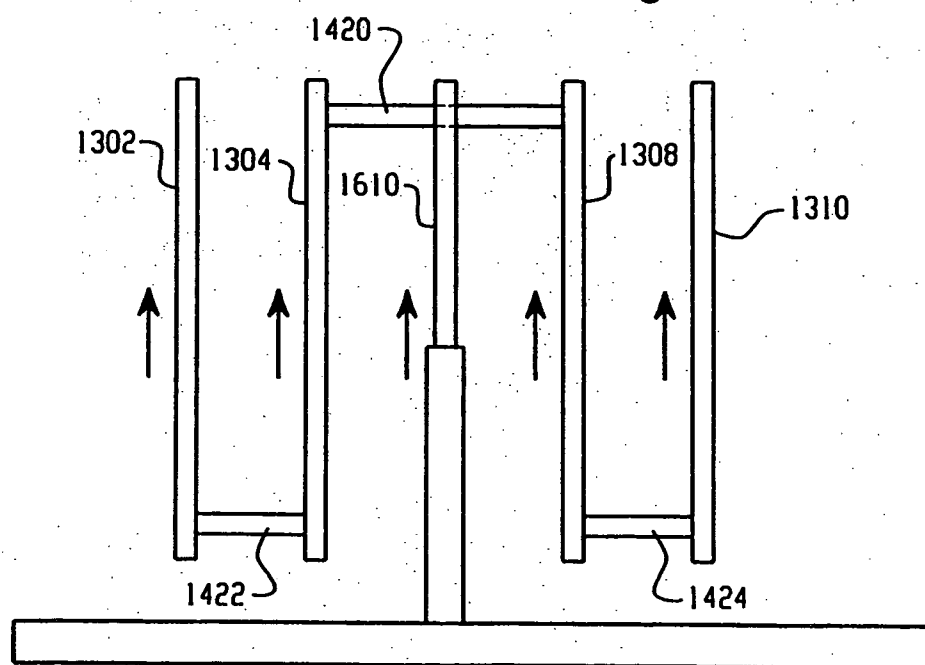


Fig. 22B

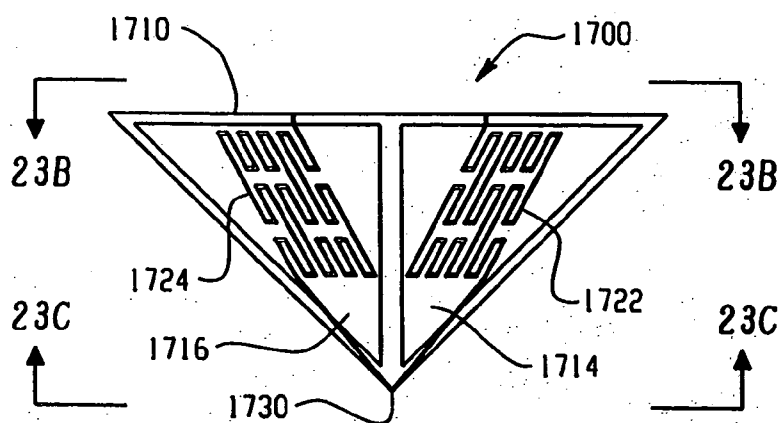


Fig. 23A

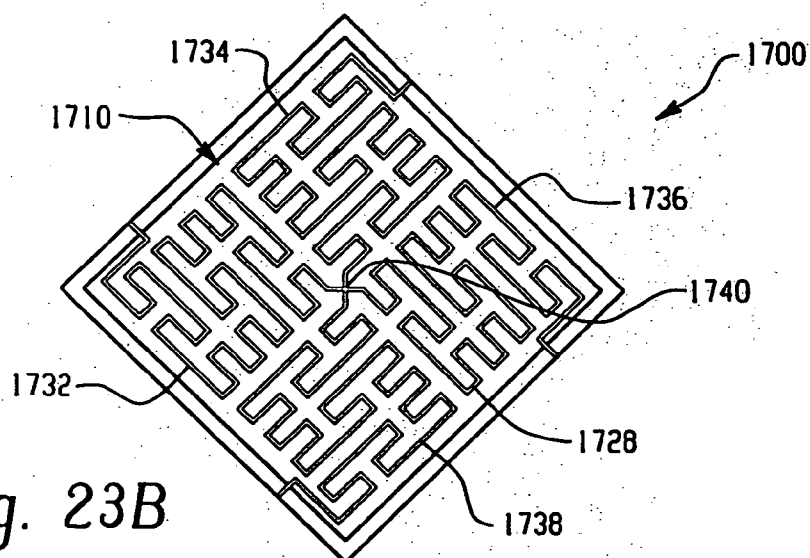


Fig. 23B

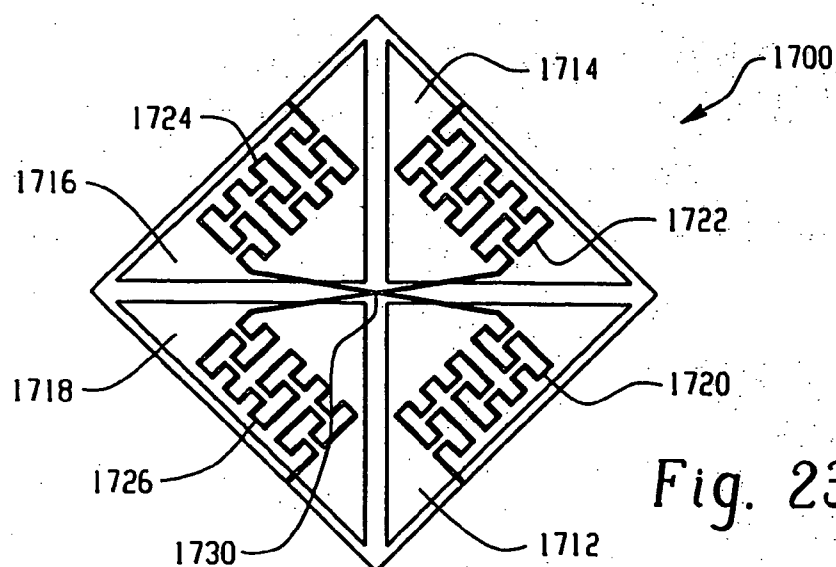


Fig. 23C

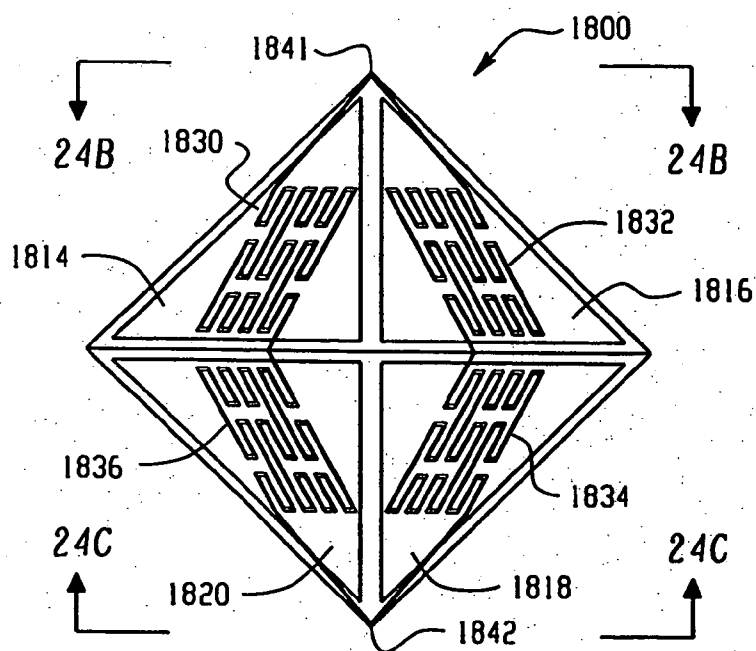


Fig. 24A

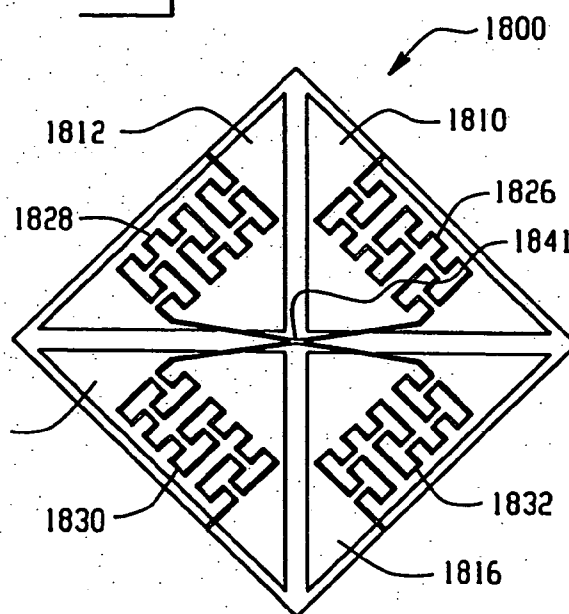


Fig. 24B

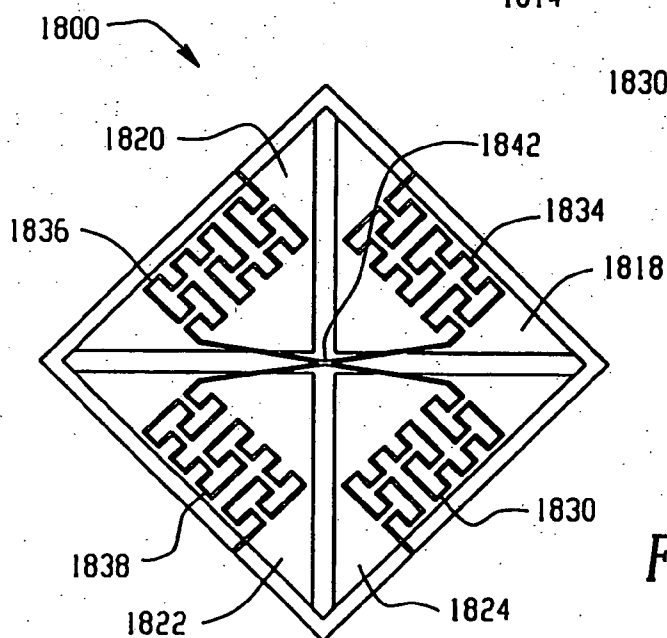


Fig. 24C

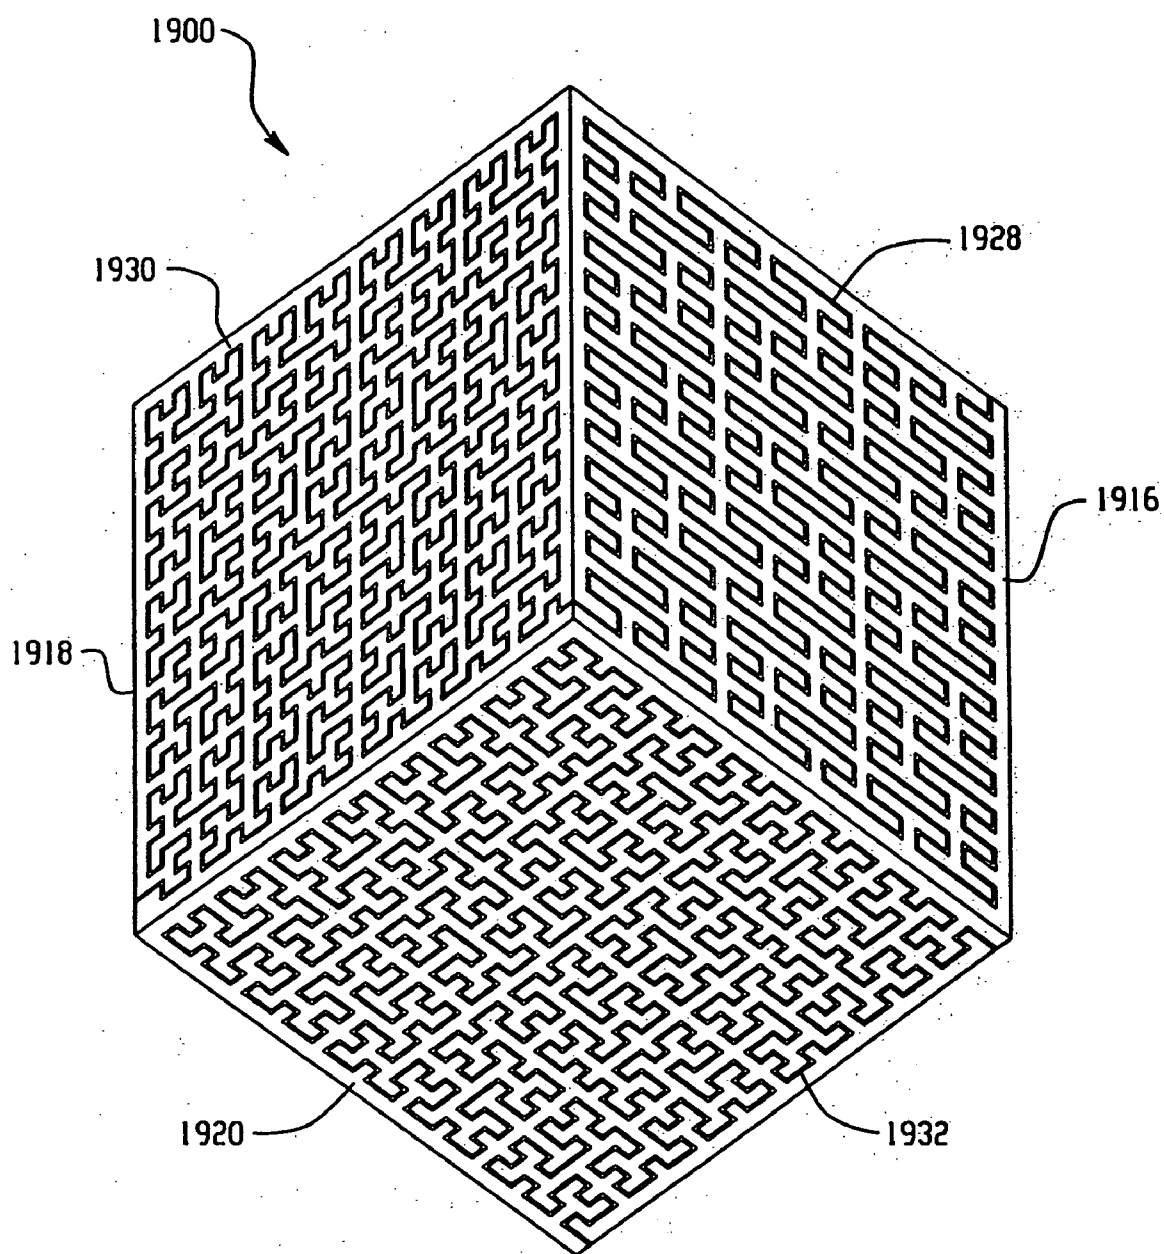


Fig. 25






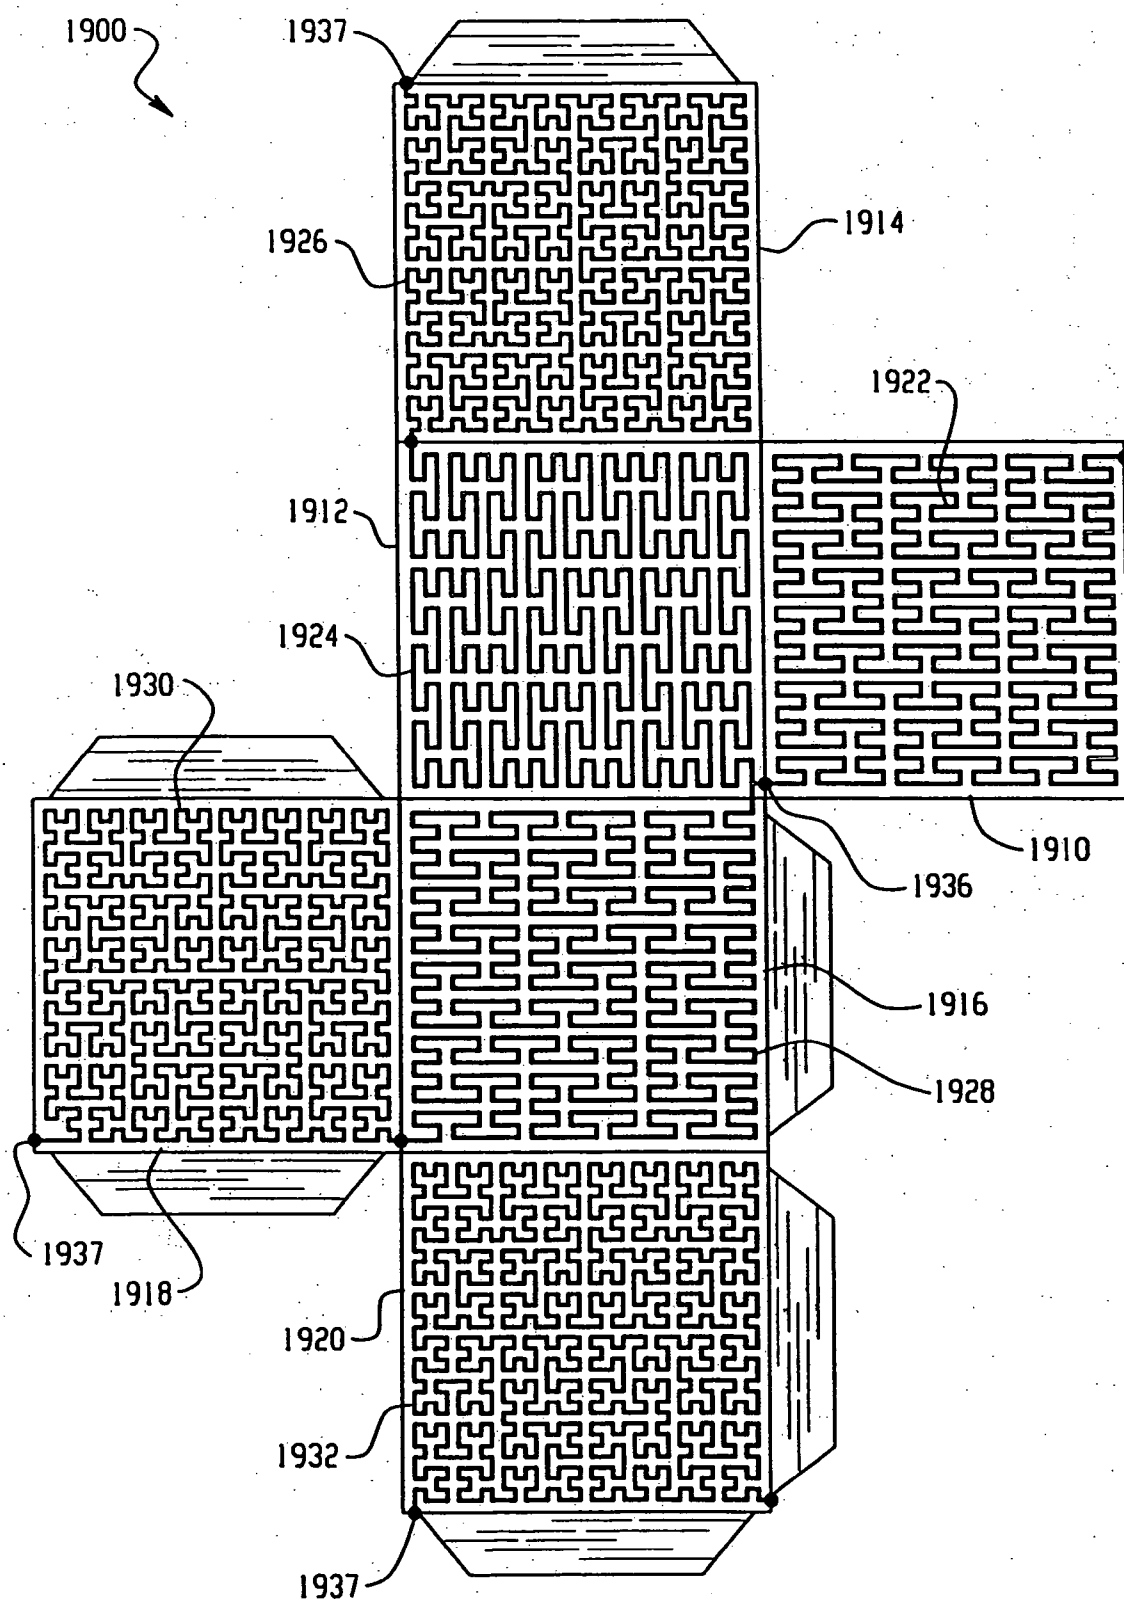


Fig. 26

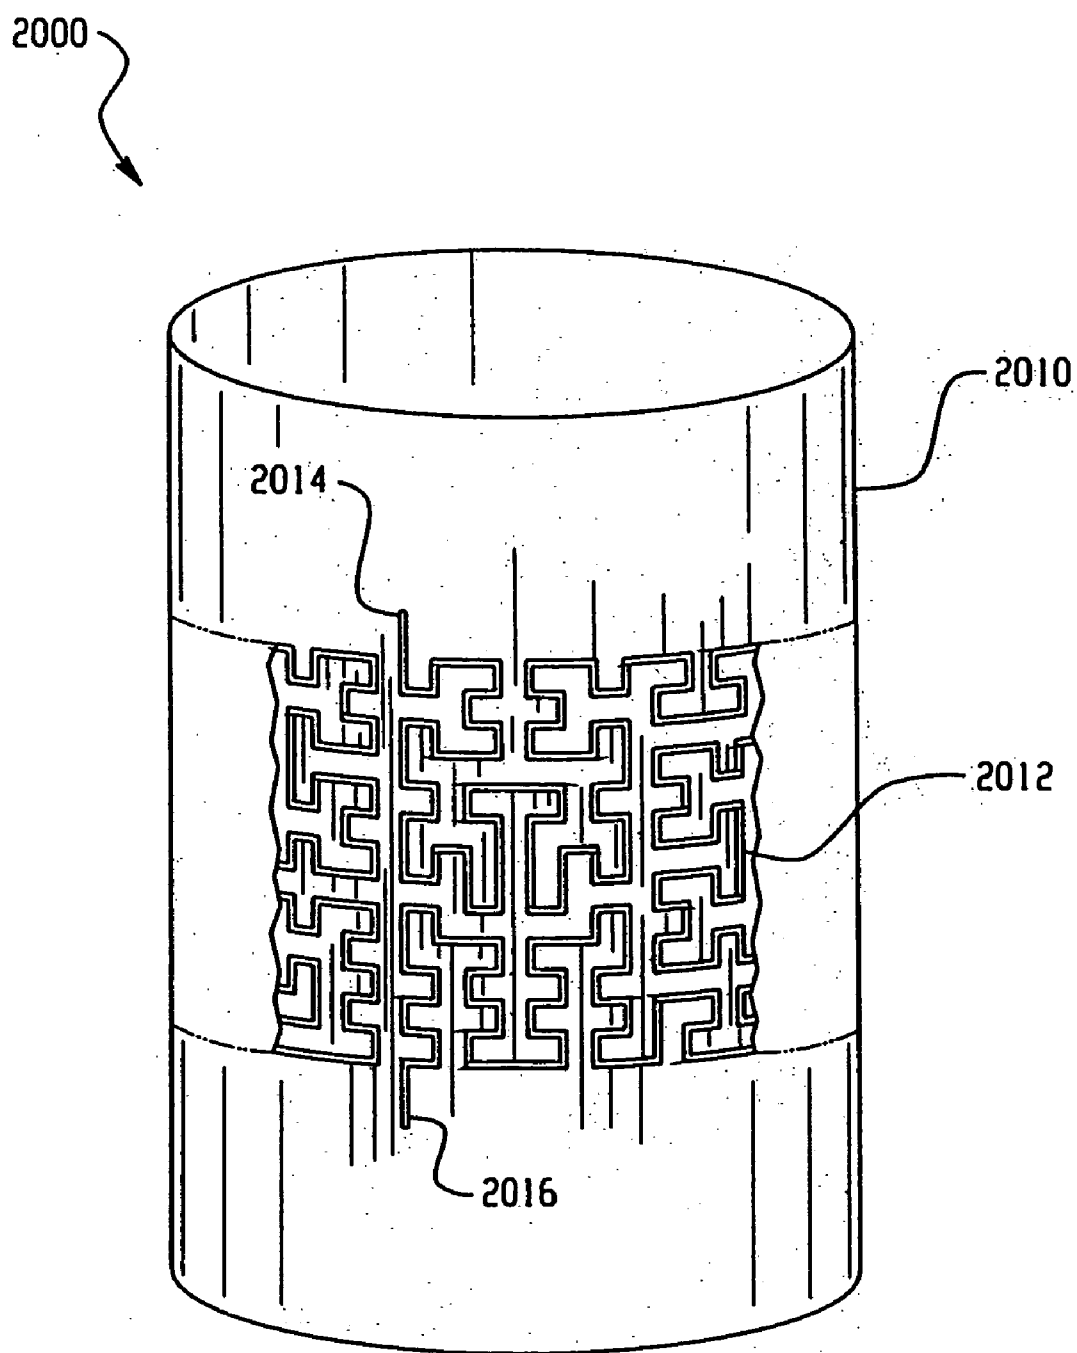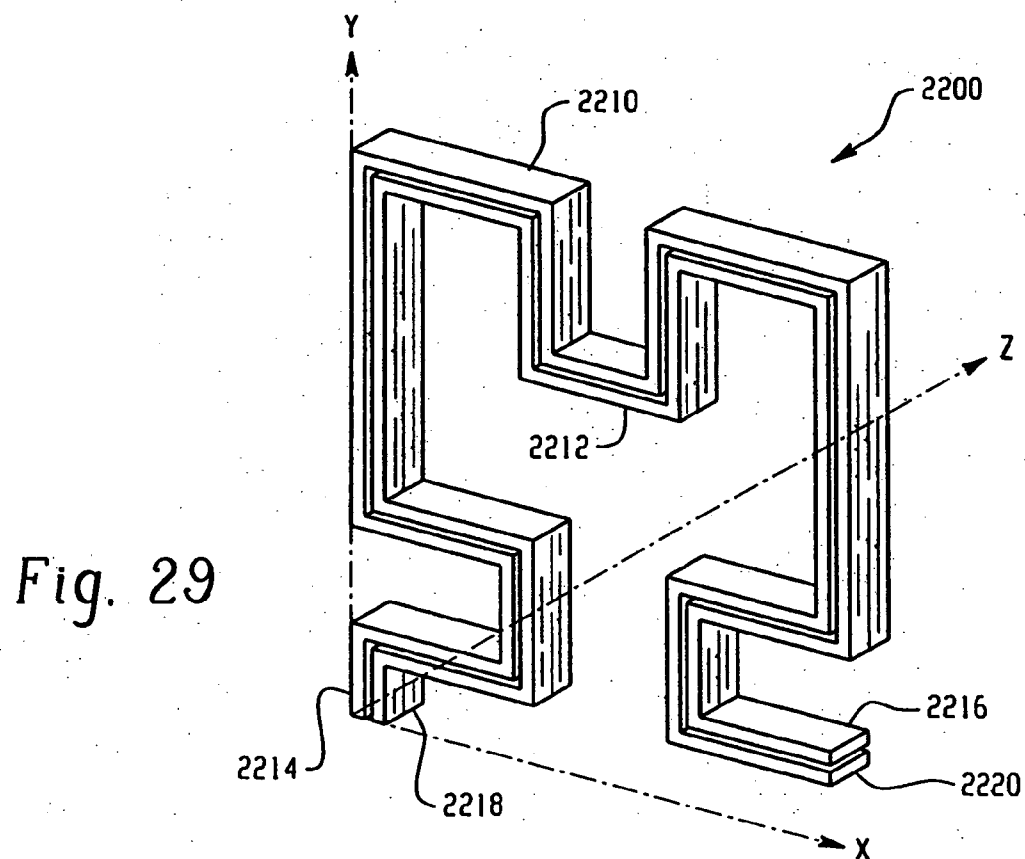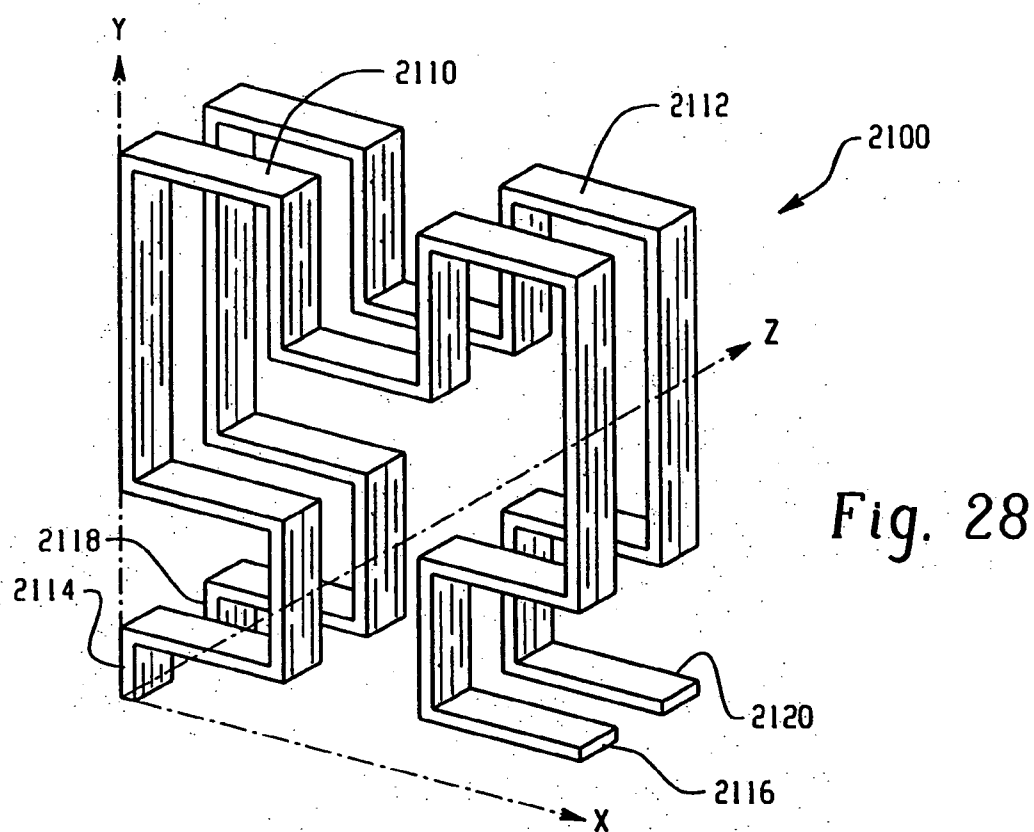

*Fig. 27*



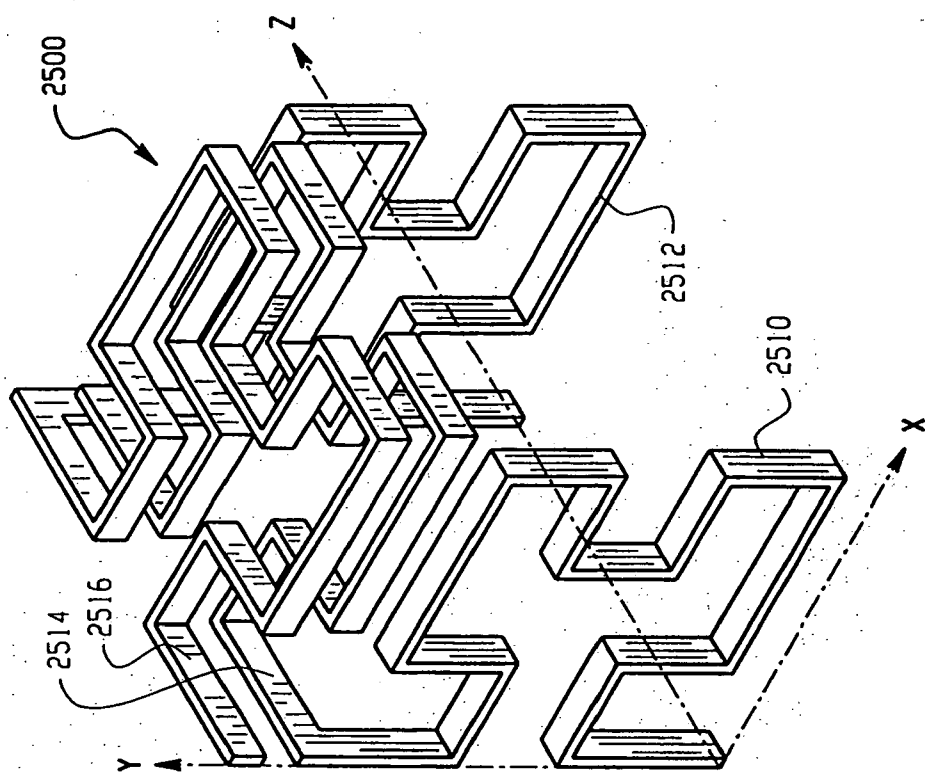


Fig. 32

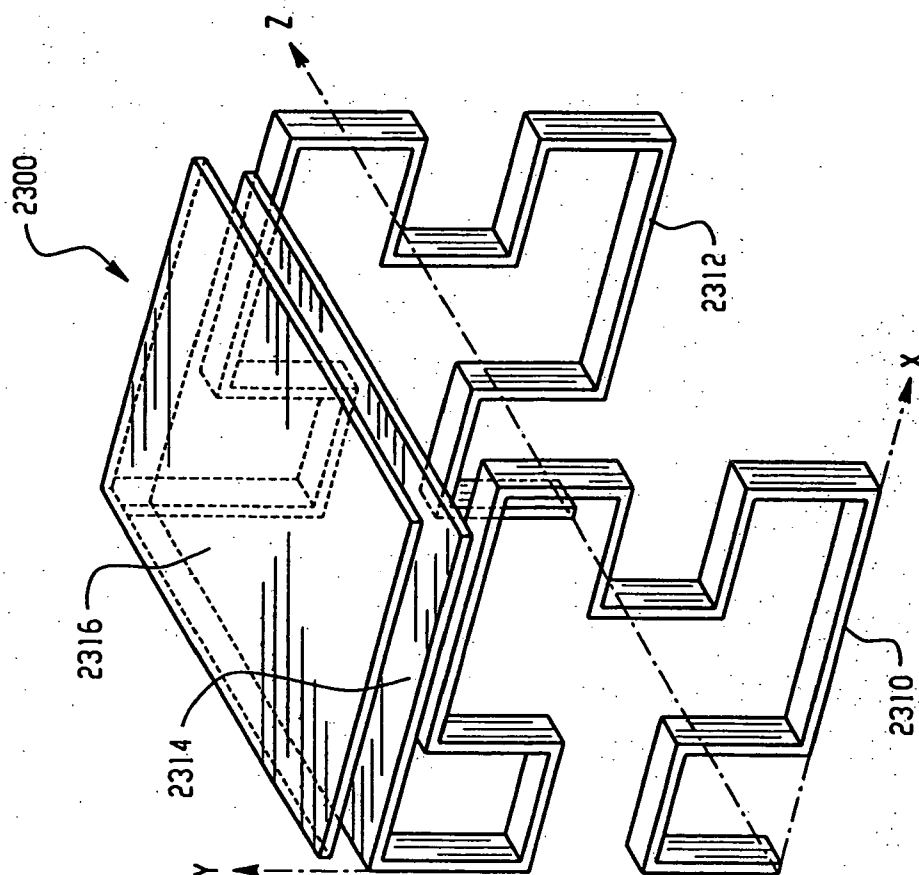


Fig. 30

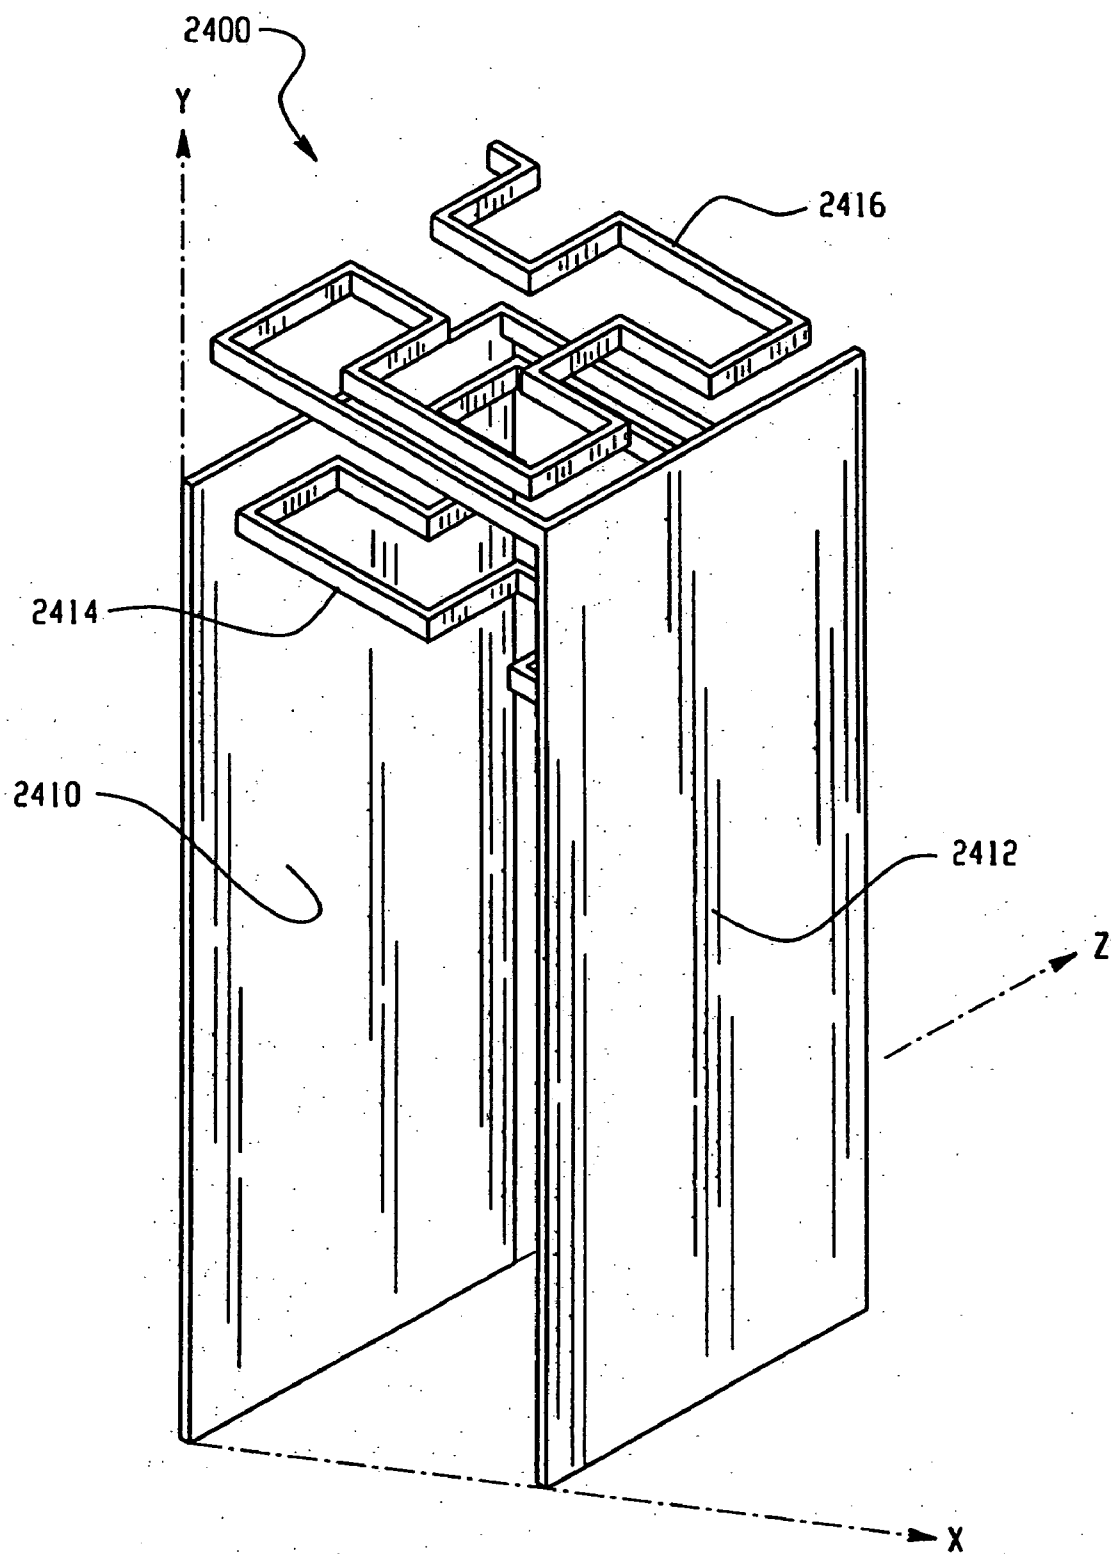


Fig. 31

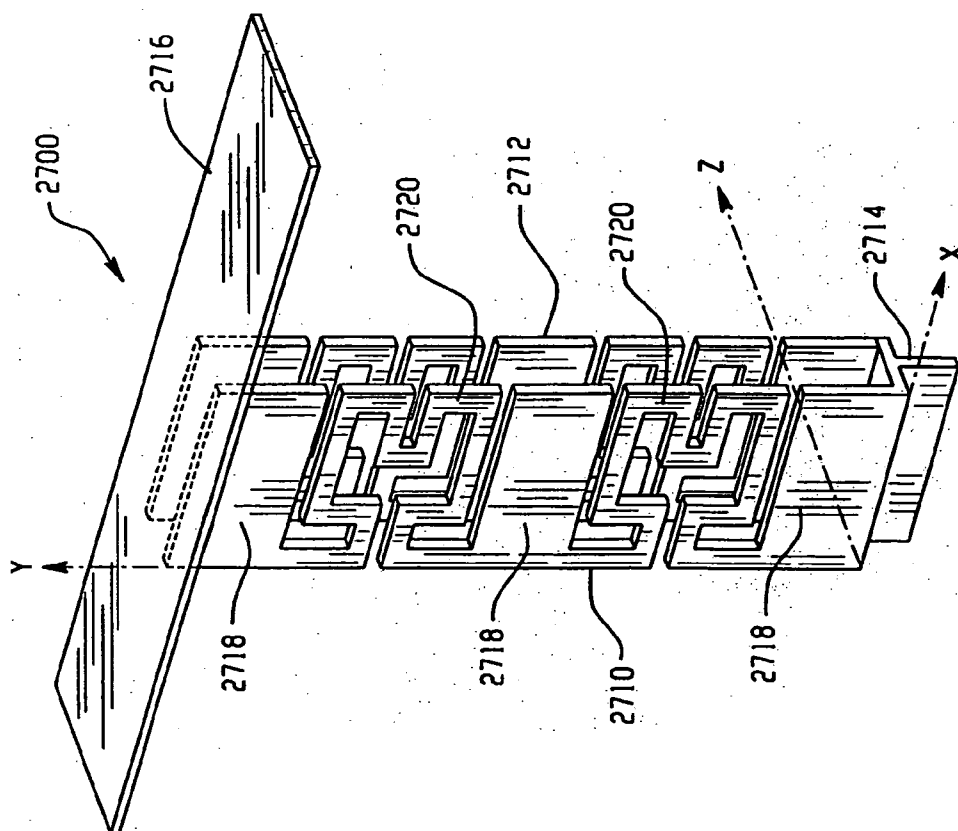


Fig. 33

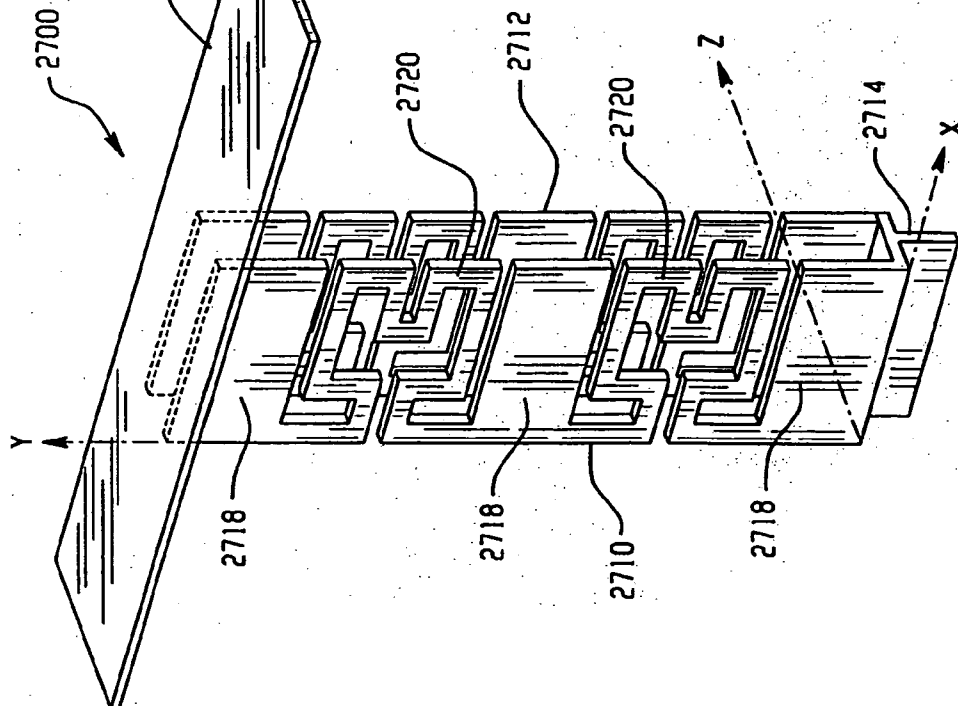
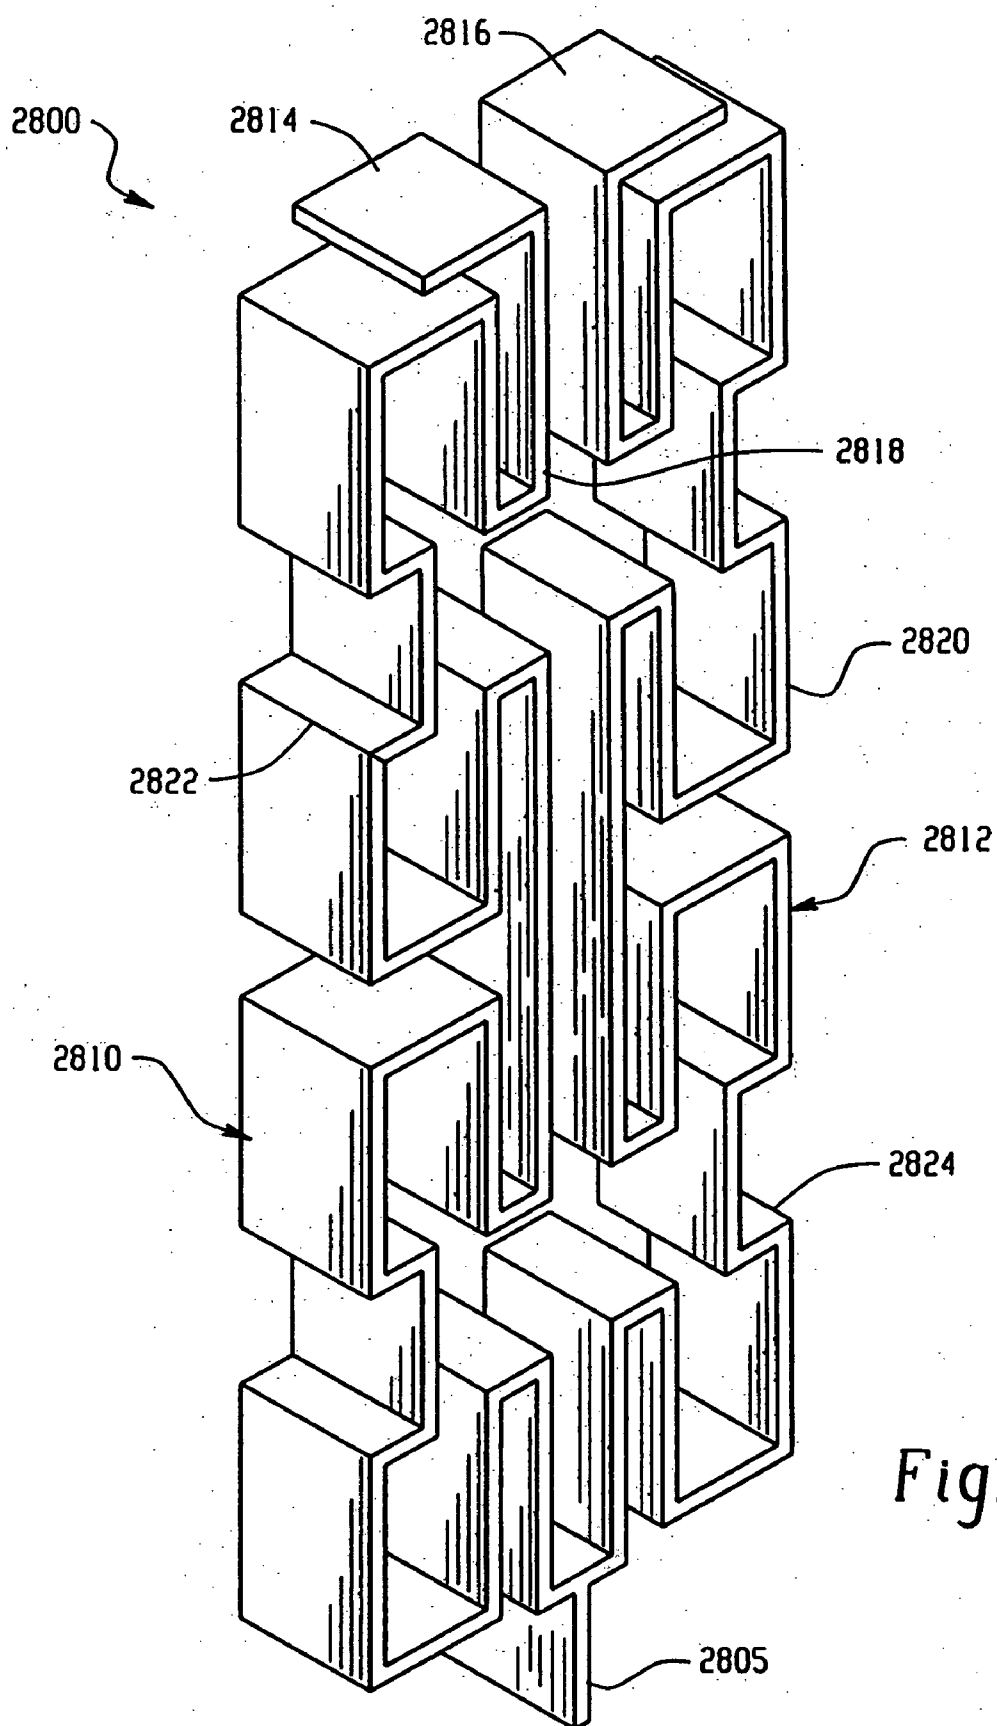


Fig. 34



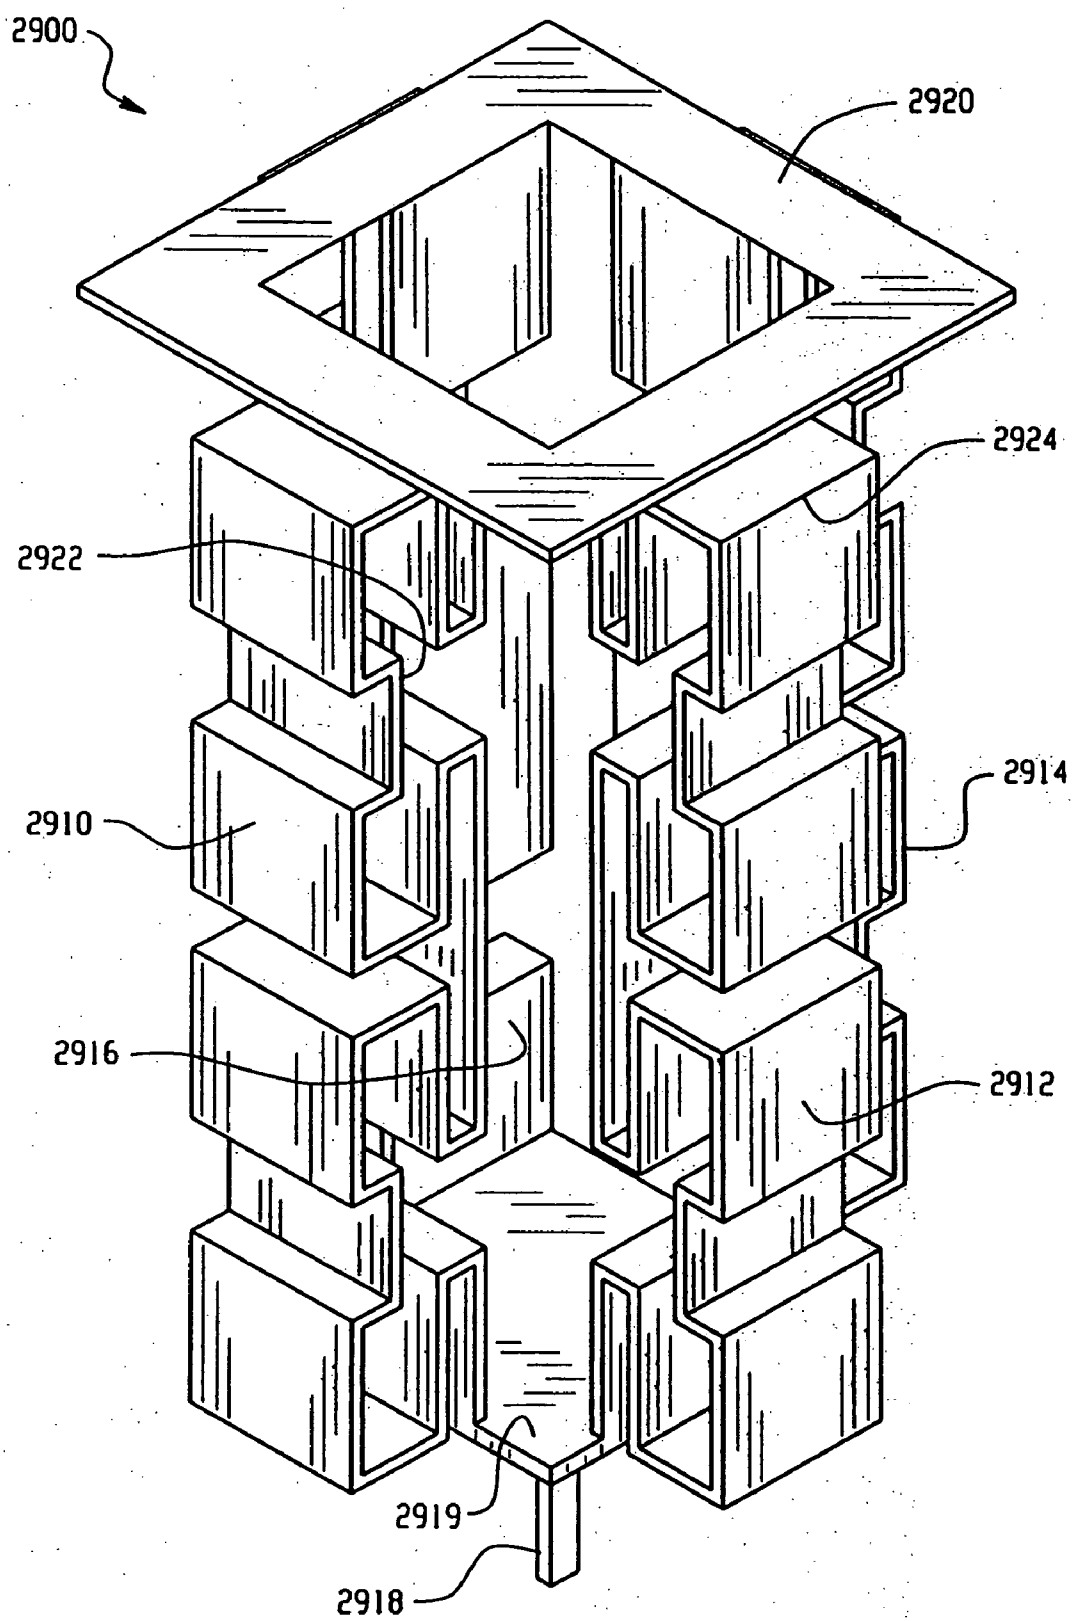


Fig. 36



# MINIATURE ANTENNA HAVING A VOLUMETRIC STRUCTURE

## CROSS-REFERENCE TO RELATED APPLICATION

**[0001]** This application is a continuation of International Patent Application No. PCT/EP2003/001695, filed on Feb. 19, 2003.

## FIELD

**[0002]** The technology described in this patent application relates generally to the field of antennas. More particularly, the application describes a miniature antenna having a volumetric structure. The technology described in this patent is especially well suited for long wavelength applications, such as high power radio broadcast antennas, long distance high-frequency (HF) communication antennas, medium frequency (MF) communication antennas, low-frequency (LF) communication antennas, very low-frequency (VLF) communication antennas, VHF antennas, and UHF antennas, but may also have utility in other antenna applications.

## BACKGROUND

**[0003]** Miniature antenna structures are known in this field. For example, a miniature antenna structure utilizing a geometry referred to as a space-filling curve is described in the co-owned International PCT Application WO 01/54225, entitled "Space-Filling Miniature Antennas," which is hereby incorporated into the present application by reference. FIG. 1 shows one example of a space-filling curve 10. A space-filling curve 10 is formed from a line that includes at least ten segments, with each segment forming an angle with an adjacent segment. In addition, when used in an antenna, each segment in the space-filling curve 10 should be shorter than one-tenth of the free-space operating wavelength of the antenna.

**[0004]** It should be understood that a miniature antenna as used within this application refers to an antenna structure with physical dimensions that are small relative to the operational wavelength of the antenna. The actual physical dimensions of the miniature antenna will, therefore, vary depending upon the particular application. For instance, one exemplary application for a miniature antenna is a long wavelength HF communication antenna. Such antennas are often located onboard ships for which a small dimensioned antenna structure may be desirable. A typical long wavelength HF antenna onboard a ship that operates in the 2-30 MHz range may, for example, be ten (10) to fifty (50) meters in height, and can be significantly reduced in size using a miniature antenna structure, as described herein. In comparison, if a miniature antenna structure, as describe herein, is used as the antenna in a cellular telephone, then the overall physical dimensions of the miniature antenna will be significantly smaller.

## SUMMARY

**[0005]** A miniature antenna includes a radiating arm that defines a grid dimension curve. In one embodiment, the radiating arm includes a planar portion and at least one extruded portion. The planar portion of the radiating arm defines the grid dimension curve. The extruded portion of the radiating arm extends from the planar portion of the radiating arm to define a three-dimensional structure. In one embodiment, the miniature antenna includes a first radiating arm that defines a

first grid dimension curve within a first plane and a second radiating arm that defines a second grid dimension curve within a second plane. In one embodiment, the miniature antenna includes a radiating arm that forms a non-planar structure.

## BRIEF DESCRIPTION OF THE DRAWINGS

**[0006]** FIG. 1 shows one example of a space-filling curve;  
**[0007]** FIGS. 2-5 illustrate an exemplary two-dimensional antenna geometry forming a grid dimension curve;  
**[0008]** FIG. 6 shows a three-dimensional view of an exemplary miniature antenna having an extruded volumetric structure;  
**[0009]** FIG. 7 is a three-dimensional view of another exemplary embodiment of a miniature antenna having an extruded volumetric structure;  
**[0010]** FIG. 8 is a three-dimensional view of an additional exemplary embodiment of a miniature antenna having an extruded volumetric structure;  
**[0011]** FIG. 9 is a three-dimensional view of a further exemplary embodiment of a miniature antenna having an extruded volumetric structure;  
**[0012]** FIG. 10 is a three-dimensional view of an exemplary miniature antenna having extruded portions;  
**[0013]** FIGS. 11A-11C show an exemplary miniature antenna with a parasitic slotted grid dimension curve;  
**[0014]** FIG. 12 is a three-dimensional view of an exemplary miniature antenna with four parallel-fed radiating arms arranged in a volumetric structure;  
**[0015]** FIG. 13 shows one alternative embodiment of the exemplary miniature antenna of FIG. 12 that includes a top-loading portion.  
**[0016]** FIG. 14 is a three-dimensional view of an exemplary miniature antenna with two parallel-fed vertically stacked radiating arms;  
**[0017]** FIG. 15 shows one alternative embodiment of the exemplary miniature antenna of FIG. 14 that includes three or more parallel-fed vertically stacked radiating arms;  
**[0018]** FIG. 16 is a three-dimensional view of an exemplary miniature folded monopole antenna;  
**[0019]** FIG. 17 shows one alternative embodiment of the exemplary miniature antenna of FIG. 16 that includes two or more folded portions;  
**[0020]** FIGS. 18A-18C show an exemplary miniature antenna having an active radiating arm and a plurality of parasitic radiating arms.  
**[0021]** FIGS. 18D and 18E show two alternative configurations for the miniature antenna of FIGS. 18A-18C.  
**[0022]** FIGS. 19A and 19B show an exemplary miniature antenna with a plurality of half-wavelength resonant radiating arms;  
**[0023]** FIGS. 20A and 20B show one alternative embodiment of the miniature antenna of FIGS. 19A and 19B;  
**[0024]** FIGS. 21A and 21B show an alternative embodiment of the miniature antenna of FIGS. 20A and 20B having a quarter wavelength center-feed radiating arm;  
**[0025]** FIGS. 22A and 22B show another alternative embodiment of the miniature antenna of FIGS. 21A and 21B;  
**[0026]** FIGS. 23A-23C show an exemplary miniature antenna having a pyramidal structure;  
**[0027]** FIGS. 24A-24C show an exemplary miniature antenna having a rhombic structure;  
**[0028]** FIGS. 25 and 26 show an exemplary miniature antenna having a polyhedral structure;

[0029] FIG. 27 is a three-dimensional view of an exemplary miniature cylindrical slot antenna;

[0030] FIG. 28 is a three-dimensional view of an exemplary miniature antenna having an active radiating arm and a side-coupled parasitic radiating arm;

[0031] FIG. 29 is a three-dimensional view of an exemplary miniature antenna having an active radiating arm and an inside-coupled parasitic radiating arm;

[0032] FIG. 30 is a three-dimensional view of an exemplary miniature antenna having active and parasitic radiating arms with electromagnetically coupled top-loading portions;

[0033] FIG. 31 shows one alternative embodiment of the miniature antenna of FIG. 30;

[0034] FIG. 32 shows another alternative embodiment of the miniature antenna of FIG. 30;

[0035] FIG. 33 is a three-dimensional view of an exemplary extruded miniature antenna having an extruded top-loading portion;

[0036] FIG. 34 is a three-dimensional view of an exemplary miniature antenna having two parallel radiating arms with a common top-loading portion;

[0037] FIG. 35 is a three-dimensional view of an exemplary top-loaded two branch grid dimension curve antenna; and

[0038] FIG. 36 is a three-dimensional view of an exemplary top-loaded four branch grid dimension curve antenna.

#### DETAILED DESCRIPTION

[0039] Referring now to the remaining drawing figures, FIGS. 2-5 illustrate an exemplary two-dimensional antenna geometry 20 forming a grid dimension curve. The grid dimension of a curve may be calculated as follows. A first grid having square cells of length L1 is positioned over the geometry of the curve, such that the grid completely covers the curve. The number of cells (N1) in the first grid that enclose at least a portion of the curve are counted. Next, a second grid having square cells of length L2 is similarly positioned to completely cover the geometry of the curve, and the number of cells (N2) in the second grid that enclose at least a portion of the curve are counted. In addition, the first and second grids should be positioned within a minimum rectangular area enclosing the curve, such that no entire row or column on the perimeter of one of the grids fails to enclose at least a portion of the curve. The first grid should include at least twenty-five cells, and the second grid should include four times the number of cells as the first grid. Thus, the length (L2) of each square cell in the second grid should be one-half the length (L1) of each square cell in the first grid. The grid dimension (D<sub>g</sub>) may then be calculated with the following equation:

$$D_g = -\frac{\log(N2) - \log(N1)}{\log(L2) - \log(L1)}.$$

[0040] For the purposes of this application, the term grid dimension curve is used to describe a curve geometry having a grid dimension that is greater than one (1). The larger the grid dimension, the higher the degree of miniaturization that may be achieved by the grid dimension curve in terms of an antenna operating at a specific frequency or wavelength. In addition, a grid dimension curve may, in some cases, also meet the requirements of a space-filling curve, as defined above. Therefore, for the purposes of this application a space-filling curve is one type of grid dimension curve.

[0041] FIG. 2 shows an exemplary two-dimensional antenna 20 forming a grid dimension curve with a grid dimension of approximately two (2). FIG. 3 shows the antenna 20 of FIG. 2 enclosed in a first grid 30 having thirty-two (32) square cells, each with a length L1. FIG. 4 shows the same antenna 20 enclosed in a second grid 40 having one hundred twenty-eight (128) square cells, each with a length L2. The length (L1) of each square cell in the first grid 30 is twice the length (L2) of each square cell in the second grid 40 (L2=2×L1). An examination of FIGS. 3 and 4 reveal that at least a portion of the antenna 20 is enclosed within every square cell in both the first and second grids 30, 40. Therefore, the value of N1 in the above grid dimension (D<sub>g</sub>) equation is thirty-two (32) (i.e., the total number of cells in the first grid 30), and the value of N2 is one hundred twenty-eight (128) (i.e., the total number of cells in the second grid 40). Using the above equation, the grid dimension of the antenna 20 may be calculated as follows:

$$D_g = -\frac{\log(128) - \log(32)}{\log(2 \times L1) - \log(L1)} = 2$$

[0042] For a more accurate calculation of the grid dimension, the number of square cells may be increased up to a maximum amount. The maximum number of cells in a grid is dependant upon the resolution of the curve. As the number of cells approaches the maximum, the grid dimension calculation becomes more accurate. If a grid having more than the maximum number of cells is selected, however, then the accuracy of the grid dimension calculation begins to decrease. Typically, the maximum number of cells in a grid is one thousand (1000).

[0043] For example, FIG. 5 shows the same antenna 20 enclosed in a third grid 50 with five hundred twelve (512) square cells, each having a length L3. The length (L3) of the cells in the third grid 50 is one half the length (L2) of the cells in the second grid 40, shown in FIG. 4. As noted above, a portion of the antenna 20 is enclosed within every square cell in the second grid 40, thus the value of N for the second grid 40 is one hundred twenty-eight (128). An examination of FIG. 5, however, reveals that the antenna 20 is enclosed within only five hundred nine (509) of the five hundred twelve (512) cells of the third grid 50. Therefore, the value of N for the third grid 50 is five hundred nine (509). Using FIGS. 4 and 5, a more accurate value for the grid dimension (D) of the antenna 20 may be calculated as follows:

$$D_g = -\frac{\log(509) - \log(128)}{\log(2 \times L2) - \log(L2)} \approx 1.9915$$

[0044] FIG. 6 shows a three-dimensional view of an exemplary miniature antenna 60 having an extruded volumetric structure. Also shown are x, y and z axes to help illustrate the orientation of the antenna 60. The antenna 60 includes a radiating arm that defines a grid dimension curve 62 in the xy plane. More particularly, the grid dimension curve 62 extends continuously in the xy plane between a first end point 64 and a second end point 66, and forms a rectangular periphery in the xy plane. In addition, the antenna 60 includes an extruded portion 68 that extends away from the grid dimension curve 62 in a direction parallel to the z axis, forming a three-

dimensional representation of the grid dimension curve 62. A feeding point 70 is located at a point on the extruded portion 68 along the z axis from the first end point 64 of the grid dimension curve 62. Also illustrated is a ground plane 72 in the xz plane that is separated from the antenna 60 by a pre-defined distance. The antenna 60 could, for example, be separated from the ground plane 72 by some type of dielectric material, as known to those skilled in the art.

[0045] In operation, the feeding point 70 of the antenna 60 is coupled to circuitry to send and/or receive RF signals within a pre-selected frequency band. The frequency band of the antenna 60 may be tuned, for example, by changing the overall length of the grid dimension curve 62. The location of the feeding point 70 on the antenna 60 affects the resonant frequency and impedance of the antenna 60, and can therefore alter the bandwidth and power efficiency of the antenna 60. Thus, the position of the feeding point 70 may be selected to achieve a desired balance between bandwidth and power efficiency. It should be understood, however, that the operational characteristics of the antenna 60, such as resonant frequency, impedance bandwidth, voltage standing wave ratio (VSWR) and power efficiency, may also be affected by varying other features of the antenna 60, such as the type of conductive material, the distance between the antenna 60 and the ground plane 72, the length of the extruded portion 68, or other physical characteristics.

[0046] FIG. 7 is a three-dimensional view of another exemplary embodiment of a miniature antenna 80 having an extruded volumetric structure. This embodiment 80 is similar to the antenna 60 described above with reference to FIG. 6, except that the feeding point 82 of the antenna is positioned at the first end point 64 of the grid dimension curve 62 and the antenna 80 includes a grounding point 84 that is coupled to the ground plane 72 at the second end point 66 of the grid dimension curve 62. As noted above, the position of the feeding point 82 affects the impedance, VSWR, bandwidth and power efficiency of the antenna 80. Similarly, coupling the antenna 80 to the ground plane 72 has an effect on the impedance, resonant frequency and bandwidth of the antenna 80.

[0047] FIG. 8 is a three-dimensional view of an additional exemplary embodiment of a miniature antenna 90 having an extruded volumetric structure. This embodiment 90 is similar to the antenna shown in FIG. 7, except that the feeding point 92 is located at a corner of the extruded portion 68 of the antenna 90 along the z axis from the first end point 64 of the grid dimension curve 62.

[0048] FIG. 9 is a three-dimensional view of a further exemplary embodiment of a miniature antenna 100 having an extruded volumetric structure. This embodiment 100 is similar to the embodiment 90 shown in FIG. 8, except the antenna 100 is tilted, forming an angle  $\theta$  between the antenna 100 and the ground plane 72. In addition, the grounding point 102 in this embodiment 100 is coupled to a corner of the extruded portion 68 of the antenna 100 opposite the second end point 66 of the grid dimension curve 62. As noted above, the distance between the antenna 100 and the ground plane 100, as well as the grounding point position, can affect the operational characteristics of the antenna 100, such as the frequency band and power efficiency. Thus, the angle  $\theta$  between the antenna 100 and the ground plane 72 can be selected to help achieve the desired antenna characteristics.

[0049] FIG. 10 is a three-dimensional view of an exemplary miniature antenna 110 having extruded portions 112. Also

shown are x, y and z axes to help illustrate the orientation of the antenna 110. The antenna 110 includes a radiating arm that defines a grid dimension curve 114 in the xy plane. More particularly, the grid dimension curve 114 extends continuously in the xy plane from a first end point 116 to a second end point 118, with the feeding point 120 of the antenna 110 located at the first end point 116 of the grid dimension curve 114. In addition, sections of the grid dimension curve 114 are extruded in a direction along the z axis to form the plurality of extruded portions 112. Similar to the antennas described above, the frequency band of the antenna 110 may be tuned by changing the overall length of the grid dimension curve 114 or other physical characteristics of the antenna 110.

[0050] In the antenna embodiment 110 shown in FIG. 10, the extruded portions 112 of the antenna 110 are located on segments of the grid dimension curve 114 that are parallel with the y axis. In another similar embodiment, however, the extruded portions 112 of the antenna 100 may be located at positions along the grid dimension curve 114 that have relatively high current densities.

[0051] FIGS. 11A-11C show an exemplary miniature antenna 120 with a parasitic slotted grid dimension curve. The antenna 120 includes an active radiating arm 122 and a parasitic radiating arm 124. FIG. 11A is a cross-sectional view showing the orientation between the active 122 and parasitic 124 radiating arms of the antenna 120, FIG. 11B is a front view showing the active radiating arm 122 of the antenna 120, and FIG. 11C is a rear view showing the parasitic radiating arm 124 of the antenna 120.

[0052] FIG. 11A shows a cross-sectional view of the antenna 120 in an xy plane. Also illustrated is a cross-sectional view of a ground plane 126. The active radiating arm 122 is separated from the ground plane 126 by a pre-determined distance, and extends away from the ground plane 126 along the y axis. The active radiating arm 122 may, for example, be separated from the ground plane 126 by a dielectric material. The parasitic radiating arm 124 is coupled at one end to the ground plane 126 and extends away from the ground plane 126 parallel to the active radiating arm 122. The distance between the active 122 and parasitic 124 radiating arms is chosen to provide electromagnetic coupling. This electromagnetic coupling increases the effective volume and enhances the frequency bandwidth of the antenna 120. Also illustrated in FIG. 11A is an antenna feeding point 128 located on the active radiating arm 122 of the antenna 120.

[0053] FIG. 11B is a three-dimensional view showing the active radiating arm 122 of the antenna 120. The active radiating arm 122 includes a conductor 130 that defines a grid dimension curve extending continuously from a first end point 132 to a second end point 134. The feeding point 128 of the antenna 120 is preferably located at the first end point 132 of the conductor 130. The active radiating arm 122 may be fabricated by patterning the conductor 130 onto a substrate material (as shown) to form a grid dimension curve, by cutting or molding the conductor 130 into the shape of a grid dimension curve 130, or by some other suitable antenna fabrication method.

[0054] FIG. 11C is a three-dimensional view showing the parasitic radiating arm 124 of the antenna 120. The parasitic radiating arm 124 is a slot antenna that includes a grid dimension curve 136 defined by a slot in a conductive structure 138, such as a conductive plate. The conductive structure 138 is coupled to the ground plane 126. The grid dimension curve

**136** in the parasitic radiating arm **124** is preferably the same pattern as the grid dimension curve **130** in the active radiating arm **122** of the antenna **120**.

**[0055]** FIG. **12** is a three-dimensional view of an exemplary miniature antenna **140** with four parallel-fed radiating arms **142A-142D** arranged in a volumetric structure. Also shown are x, y, and z axes to help illustrate the orientation of the antenna **140**. Each of the four radiating arms **142A-142D** is a conductor that defines a grid dimension curve in a plane perpendicular to the xz plane, and is coupled at one end to a common feeding portion **148, 150**. The radiating arms **142A-142D** may be attached to a dielectric substrate **145** (as shown), but may alternatively be formed without the dielectric substrate **145**, for example, by cutting or molding a conductive material into the shape of the grid dimension curve, or by some other suitable method. Also shown is a ground plane **152** that is separated from the common feeding point **148, 150** by some pre-defined distance. The ground plane **152** could, for example, be separated from the antenna **140** by a dielectric material.

**[0056]** Each radiating arm **142A-142D** is aligned perpendicularly with two other radiating arms, forming a box-like structure with open ends. More particularly, a first radiating arm **142A** defines a grid dimension curve parallel to the yz plane, a second radiating arm **142B** defines a grid dimension curve in the xy plane, a third radiating arm **142C** defines a grid dimension curve in the yz plane, and a fourth radiating arm **142D** defines a grid dimension curve parallel to the xy plane. Each grid dimension curve **142A-142D** includes a first end point **144** and extends continuously within its respective plane to a second end point **146** that is coupled to the common feeding portion **148, 150**.

**[0057]** The common feeding portion **148, 150** includes a rectangular portion **148** that is coupled to the second end points **146** of the four radiating arms **142A-142D**, and also includes an intersecting portion **150**. The center of the intersecting portion **150** may, for example, be the feeding point of the antenna that is coupled to a transmission medium, such as a transmission wire or circuit trace. In other exemplary embodiments, the common feeding portion **148, 150** could include only the rectangular portion **148** or the intersecting portion **150**, or could include some other suitable conductive portion, such as a solid conductive plate.

**[0058]** In operation, the frequency band of the antenna **140** is defined in significant part by the respective lengths of the radiating arms **142A-142D**. In order to achieve a larger bandwidth, the lengths may be slightly varied from one radiating arm to another, such that the radiating arms **142A-142D** resonate at different frequencies and have overlapping bandwidths. Similarly, a multi-band antenna may be achieved by varying the lengths of the radiating arms **142A-142D** by a greater amount, such that the resonant frequencies of the different arms **142A-142D** do not result in overlapping bandwidths. It should be understood, however, that the antenna's operational characteristics, such as bandwidth and power efficiency, may be altered by varying other physical characteristics of the antenna. For example, the impedance of the antenna may be affected by varying the distance between the antenna **140** and the ground plane **152**.

**[0059]** FIG. **13** shows one alternative embodiment **160** of the exemplary miniature antenna **140** of FIG. **12** that includes a top-loading portion **162**. This antenna **160** is similar to the antenna **140** described above with reference to FIG. **12**, except that a top-loading portion **162** is coupled to each of the

radiating arms **142A-142D**. The top-loading portion **162** includes a solid conductive portion **164** that is aligned above (along the y axis) the radiating arms **142A-142D** in the xz plane, and four protruding portions **166** that electrically couple the solid conductive portion **164** to the first end points **144** of each of the radiating arms **142A-142D**.

**[0060]** FIG. **14** is a three-dimensional view of an exemplary miniature antenna **170** with two parallel-fed vertically stacked radiating arms **171, 174**. This antenna **170** is similar to the antenna **140** shown in FIG. **12**, except that only two radiating arms **171, 174** are included in this embodiment **170**. A first radiating arm **171** is a conductor that defines a grid dimension curve in the xy plane, and a second radiating arm **174** is a conductor that forms a grid dimension curve parallel to the first radiating arm. Both radiating arms **171, 174** are coupled to a common feeding portion **148, 150**, as described above with reference to FIG. **12**.

**[0061]** FIG. **15** shows one alternative embodiment **190** of the exemplary miniature antenna **170** of FIG. **14** that includes three or more parallel-fed vertically stacked radiating arms. This embodiment **190** is similar to the antenna **170** shown in FIG. **14**, except at least one additional radiating arm **192** is included that defines a grid dimension curve(s) parallel to the first two radiating arms **171, 174**. In addition, one or more additional segment(s) **194** is added to the common feeding portion **148, 150** in order to couple the feeding portion **148, 150, 194** to the additional grid dimension curve(s) **192**.

**[0062]** FIG. **16** is a three-dimensional view of an exemplary miniature folded monopole antenna **1000**. The antenna **1000** includes a radiating arm with a vertical portion **1009**, a folded portion **1011**, and a top portion **1014**. Also illustrated is a ground plane **1016**. The vertical portion **1009** includes a conductor **1010** that defines a first grid dimension curve in a plane perpendicular to the ground plane **1016**. Similarly, the folded portion **1011** includes a conductor **1012** that defines a second grid dimension curve in a plane perpendicular to the ground plane **1016** and parallel with the vertical portion **1009**.

**[0063]** The top portion **1014** includes a conductive plate that couples the first grid dimension curve **1010** to the second grid dimension curve **1012**. In other embodiments, however, the top portion **1014** may include a conductive trace or other type of conductor to couple the first and second grid dimension curves **1010, 1012**. In one embodiment, for example, the top portion may define another grid dimension curve that couples the first and second grid dimension curves **1010, 1012**.

**[0064]** The first grid dimension curve **1010** includes a first end point **1018** and extends continuously to a second end point **1019**. The antenna **1000** is preferably fed at or near the first end point **1018** of the first grid dimension curve **1010**. Similarly, the second grid dimension curve **1012** includes a first end point **1020** and extends continuously to a second end point **1021**, which is coupled to the ground plane **1016**. The second end point **1019** of the first grid dimension curve **1010** is coupled to the first end point **1020** of the second grid dimension curve **1012** by the conductor on the top portion **1014** of the antenna **1000**, forming a continuous conductive path from the antenna feeding point to the ground plane **1016**.

**[0065]** FIG. **17** shows one alternative embodiment **1100** of the exemplary miniature antenna **1000** of FIG. **16** that includes a vertical portion **1009** and two or more folded portions **1011, 1105**. This embodiment **1100** is similar to the antenna **1000** described above with respect to FIG. **16**, with the addition of at least one additional folded portion(s) **1105**.

The additional folded portion(s) **1105** includes a conductor(s) **1110** that defines an additional grid dimension curve(s) in a plane perpendicular to the ground plane **1016** and parallel to the vertical portion **1009**. More particularly, the additional grid dimension curve(s) **1110** includes a first end point **1112** coupled to the top portion **1014**, and extends continuously from the first end point **1112** to a second end point **1114**, which is coupled to the ground plane **1016**. The inclusion of the additional folded portion(s) **1105** in the antenna structure **1100** may, for example, increase the bandwidth and power efficiency of the antenna **1100**.

[0066] FIGS. **18A-18C** show an exemplary miniature antenna **1200** having an active radiating arm **1210** and three parasitic radiating arms **1212-1216**. FIG. **18A** is a top view of the antenna **1200**, and FIGS. **18B** and **18C** are respective side views of the antenna **1200**.

[0067] With reference to FIG. **18A**, the antenna **1200** includes four top loading portions **1218-1224** that are perpendicular to the four radiating arms **1210-1216**. FIG. **18** shows a top view of the top-loading portions **1218-1224** and cross-sectional view of the four radiating arms **1210-1216**. The cross-sections of the active radiating arm **1210** and one of the parasitic radiating arms **1214** are aligned in a first plane (A), and the cross-sections of the other two parasitic radiating arms **1212**, **1216** are aligned in a second plane (B) that is perpendicular to both the first plane (A) and the plane of the top-loading portions **1218-1224** (i.e., the plane of the paper). The illustrated top-loading portions **1218-1224** include a rectangular-shaped conductive surface. It should be understood, however, that the top-loading portions **1218-1224** could include other conductive surfaces, such as a conductor defining a grid dimension curve. It should also be understood that differently shaped top-loading portions **1218-1224** could also be utilized.

[0068] The edges of the top-loading portions **1218-1224** are aligned such that there is a pre-defined distance between adjacent top-loading portions. The pre-defined distance between adjacent top-loading portions **1218-1224** is preferably small enough to allow electromagnetic coupling. In this manner, the top-loading portions **1218-1224** provide improved electromagnetic coupling between the active and parasitic radiating arms **1210-1216** of the antenna **1200**.

[0069] With reference to FIGS. **18B** and **18C**, the active radiating arm **1210** and three parasitic radiating arms **1212-1216** of the antenna **1200** each include conductors **1201-1204** that define a grid dimension curve in a plane perpendicular to the top loading portions **1218-1224** and a ground plane **1228**. The four grid dimension curves **1201-1204** are respectively coupled to the four top-loading portions **1218-1224**. The grid dimension curve **1201** on the active radiating arm **1210** of the antenna **1200** includes a first end point **1230** and extends continuously to a second end point that is coupled to the conductive surface of one top-loading portion **1218**. The feeding point of the antenna **1200** is preferably located at or near the first end point **1230** of the active radiating arm **1210**. The grid dimension curves **1202-1204** on the three parasitic radiating arms **1212-1216** each include a first end point **1235** coupled to the ground plane **1228**, and extend in a continuous path from the first end point **1235** to a second end point coupled to one of the top-loading portions **1220-1224**.

[0070] FIGS. **18D** and **18E** show two alternative configurations for the miniature antenna of FIGS. **18A-18C**. FIG. **18D** is a top view showing one exemplary embodiment **1240** in which the active radiating arm **1242** and the three parasitic

radiating arms **1244-1248** of the antenna **1240** are aligned in parallel planes (A-D). In addition, the active radiating arm **1242** and parasitic radiating arms **1244-1248** in this embodiment **1240** are each adjacent to two top-loading portions **1218-1224**. The end points **1249** of the respective grid dimension curves **1201-1204** are each coupled to one top-loading portion **1218-1224**. FIG. **18E** is a top view showing another exemplary embodiment **1250** in which the active radiating arm **1256** is aligned in a first plane (A) with one parasitic radiating arm **1258**, and the two other parasitic radiating arms **1252**, **1255** are aligned in a second plane (B) that is parallel to the first plane.

[0071] FIGS. **19A** and **19B** show an exemplary miniature antenna **1300** with a plurality of half-wavelength resonant radiating arms **1302-1310**. FIG. **19A** is a three-dimensional view of the antenna **1300** showing the orientation of the antenna **1300** with reference to a ground plane **1328**. Also shown in FIG. **19A** are x, y, and z axes to help illustrate the orientation of the antenna **1300**. The antenna **1300** includes five radiating arms **1302-1310** that are each aligned parallel with one another and perpendicular to the ground plane **1328**, and four connector segments **1324-1327**. Each radiating arm **1302-1310** includes a conductor **1311-1315** that defines a grid dimension curve in the plane of the respective radiating arm **1302-1310**. The antenna conductors **1311-1315** may be attached to a dielectric substrate (as shown), or may alternatively be formed without a dielectric substrate, for example, by cutting or molding the conductor **1311-1315** into the shape of a grid dimension curve.

[0072] The grid dimension curves **1311-1315** are coupled together at their end points by the connector segments **1324-1327**, forming a continuous conductive path from a feeding point **1320** on the left-most radiating arm **1302** to a grounding point **1322** on the right-most radiating arm **1310** that is coupled to the ground plane **1328**. In addition, the length of each grid dimension curve **1311-1315** is chosen to achieve a 180° phase shift in the current in adjacent radiating arm **1302-1310**.

[0073] FIG. **19B** is a schematic view **1350** of the antenna **1300** illustrating the current flow through each radiating arm **1302-1310**. As a result of the 180° phase shift, the current in each radiating arm **1302-1310** radiates in the same vertical direction (along the y axis), causing all parallel radiating arms **1302-1310** to contribute in phase to the radiation.

[0074] FIGS. **20A** and **20B** show one alternative embodiment **1400** of the miniature antenna **1300** of FIGS. **19A** and **19B**. FIG. **20A** is a three-dimensional view showing the orientation of the antenna **1400**. This embodiment **1400** is similar to the miniature antenna **1300** of FIG. **19A** except that the feeding point **1410** of the antenna **1400** is located at an end point of the grid dimension curve **1313** on the center-most radiating arm **1306**, effectively forming a monopole antenna with two symmetrical branches. One antenna branch is formed by the two left-most radiating arms **1302**, **1304**, and the other branch is formed by the two right-most radiating arms **1308**, **1310**. In addition, the antenna **1400** includes an upper connector portion **1420** and two lower connector portions **1422**, **1424**. The upper connector portion **1420** couples together one end point from each of the three center grid dimension curves **1312**, **1313**, **1314**, and the two lower connector portions **1422**, **1424** each couple together end points of the grid dimension curves **1311**, **1312**, **1314**, **1315** in the respective symmetrical branches. In addition, the length of

each grid dimension curve **1311-1315** is selected to achieve a  $180^\circ$  phase shift in the current in adjacent radiating arms **1302-1310**.

[0075] FIG. 20B is a schematic view **1450** of the antenna **1400** illustrating the current flow through each radiating arm **1302-1310**. As described above, the  $180^\circ$  phase shift causes the current in each radiating arm **1302-1310** to radiate in the same vertical direction (along the y axis).

[0076] FIGS. 21A and 21B show an alternative embodiment **1500** of the miniature antenna **1400** of FIGS. 20A and 20B having a quarter wavelength center-fed radiating arm **1510**. FIG. 21A is a three-dimensional view showing the orientation of the antenna **1500**. This embodiment **1500** is similar to the antenna **1400** of FIG. 20A, except that the grid dimension curve **1520** on the center-most radiating arm **1510** is shorter in length than the grid dimension curves **1311, 1312, 1314, 1315** on the other four radiating arms **1302, 1304, 1308, 1310**. The length of the center-most grid dimension curve **1520** is selected to achieve a  $90^\circ$  phase shift in current between the center-most radiating arm **1510** and the adjacent radiating arms **1304, 1308**. The lengths of the other four radiating arms **1302, 1304, 1308, 1310** are chosen to achieve a  $180^\circ$  phase shift in current, as described above.

[0077] FIG. 21B is a schematic view **1550** of the antenna illustrating the current flow through each radiating arm **1302, 1304, 1308, 1310, 1510**. Similar to the antenna **1400** described above with reference to FIG. 20B, the  $90^\circ$  and  $180^\circ$  phase shifts in this antenna embodiment cause the current in each radiating arm **1302, 1304, 1308, 1310, 1510** to radiate in the same vertical direction (along the y axis). The shorter length of the center grid dimension curve **1520** may, however, be desirable to tune the impedance of the antenna.

[0078] FIGS. 22A and 22B show another alternative embodiment **1600** of the miniature antenna **1500** of FIGS. 21A and 21B. FIG. 22A is a three-dimensional view showing the orientation of the antenna **1600**. This antenna embodiment **1600** is similar to the antenna **1500** of FIG. 21A, except the center-most radiating arm **1610** includes a solid conductive portion **1620** coupled to an end point of the center grid dimension curve **1520**. The solid conductive portion **1620** may, for example, function as a feeding point to couple the center grid dimension curve **1520** to a transmission medium **1630**, such as a coaxial cable. As noted above, the length of the center-most grid dimension curve **1520** is selected to achieve a  $90^\circ$  current phase shift, and the lengths of the other four radiating arms **1302, 1304, 1308, 1310** are chosen to achieve a  $180^\circ$  current phase shift.

[0079] FIG. 22B is a schematic view **1650** of the antenna **1600** illustrating the current flow through each radiating arm **1302, 1304, 1610, 1308, 1310**. As noted above, the  $90^\circ$  and  $180^\circ$  phase shifts cause the current in each radiating arm **1302, 1304, 1610, 1308, 1310** to radiate in the same vertical direction (along the y axis).

[0080] FIGS. 23A-23C show an exemplary miniature antenna **1700** having a pyramidal structure. The antenna **1700** includes a square-shaped base **1710** and four triangular-shaped surfaces **1712-1718** that are coupled together at the edges to form a four-sided pyramid. FIG. 23A is a side view of the antenna **1700** showing two of the four triangular-shaped surfaces **1714, 1716**. FIG. 23B is a top view showing the square-shaped base **1710** of the antenna **1700**. FIG. 23C is a bottom view of the antenna **1700** showing the four triangular-shaped surfaces **1712-1718**.

[0081] With reference to FIGS. 23A and 23C, the four triangle-shaped surfaces **1712-1718** of the antenna **1700** each include a conductor **1720-1726** that defines a grid dimension curve in the plane of the respective surface **1712-1718**. One end point of each of the grid dimension curves **1720-1726** is coupled to a common feeding point **1730**, preferably located at or near the apex of the pyramid. The other end point of the grid dimension curves **1720-1726** is coupled to the square-shaped base **1720**, as shown in FIG. 23B. Schematically, the grid dimension curves **1720-1726** form four parallel conductive paths from the common feeding point **1730** to the square-shaped base **1710**.

[0082] With reference to FIG. 23B, the square-shaped base **1710** includes conductors **1732-1738** that define four additional grid dimension curves. Each grid dimension curve **1732-1738** on the base **1710** is coupled at one end point to one of the grid dimension curves **1720-1726** on the triangular-shaped surfaces **1712-1718** of the antenna **1700**. The other end points of the grid dimension curves **1732-1738** on the square-shaped base **1710** are coupled together at one common point **1740**. In one embodiment, the common point **1740** on the base **1710** of the antenna **1700** may be coupled to a ground potential to top load the antenna **1700**.

[0083] It should be understood that, in other embodiments, the antenna **1700** could instead include a differently-shaped base **1718** and a different number of triangular-shaped surfaces **1712-1718S**. For instance, one alternative embodiment of the antenna **1700** could include a triangular-shaped base **1710** and three triangular-shaped surfaces. Other alternative embodiments could include a polygonal-shaped base **1710**, other than a square, and a corresponding number of triangular-shaped surfaces. It should also be understood, that the grid dimension curves **1720-1726, 1732-1738** of the antenna **1700** may be attached to a dielectric substrate material (as shown), or may alternatively be formed without the dielectric substrate.

[0084] FIGS. 24A-24C show an exemplary miniature antenna **1800** having a rhombic structure. FIG. 24A is a side view of the antenna **1800**, and FIGS. 24B and 24C are top and bottom views, respectively. The antenna **1800** includes eight triangular-shaped surfaces **1810-1824**. Four of the triangular-shaped surfaces **1810-1816** are coupled together at the edges to form an upper four-sided pyramid (FIG. 24B) with an upward-pointing apex **1841**, and the other four triangular-shaped surfaces **1818-1824** are coupled together to form a lower four-sided pyramid (FIG. 24C) with a downward-pointing apex **1842**. The edges at the bases of the two four-sided pyramids are coupled together, as shown in FIG. 24A, to form the rhombic antenna structure.

[0085] The surfaces **1810-1824** of the antenna **1800** each include a conductor **1826-1840** that defines a grid dimension curve in the plane of the respective surface **1810-1824**. The end points of the grid dimension curves **1826-1840** are coupled together to form a conductive path having a feeding point at the downward-pointing apex **1842**. More specifically, with reference to FIG. 24C, the four grid dimension curves **1834-1840** on the surfaces **1818-1824** of the lower pyramid are each coupled at one end point to a common feeding point located at the downward-pointing apex **1842**. The other end point of each of the lower grid dimension curves **1834-1840** is coupled to an end point on one of the grid dimension curves **1826-1832** on the upper pyramid, as shown in FIG. 24A. With reference to FIG. 24B, the other end points of the grid dimension curves **1826-1832** on the upper pyramid are coupled

together at a common point located at the upward-pointing apex **1841** of the antenna **1800**. Schematically, the antenna **1800** provides four parallel electrical paths between the feeding point **1842** and the common point at the upward-pointing apex **1841**.

[0086] It should be understood that other rhombic structures having a different number of surfaces could be utilized in other embodiments of the antenna **1800**. It should also be understood that the grid dimension curves **1826-1840** of the antenna **1800** may be attached to a dielectric substrate material (as shown), or may alternatively be formed without the dielectric substrate.

[0087] FIGS. **25** and **26** show an exemplary miniature antenna **1900** having a polyhedral structure. FIG. **25** is a three-dimensional view of the miniature polyhedral antenna **1900**. The antenna **1900** includes six surfaces **1910-1920** that are coupled together at the edges to form a cube. In other embodiments, however, the antenna **1900** could include a different number of surfaces, forming a polyhedral structure other than a cube. Each surface **1910-1920** of the antenna includes a conductor **1922-1932** that defines a grid dimension curve having two end points. One endpoint **1934** of the six grid dimension curves **1922-1932** is a feeding point for the antenna **1900**, and the other endpoints are coupled together as shown in FIG. **26**. The grid dimension curves **1922-1932** may be attached to a dielectric substrate material (as shown), or may alternatively be formed without a dielectric substrate, for example, by cutting or molding a conductive material into the shape of the grid dimension curves **1922-1932**.

[0088] FIG. **26** is a two-dimensional representation of the miniature polyhedral antenna of FIG. **25**, illustrating the interconnection between the grid dimension curves **1922-1932** on each surface **1910-1920** of the antenna **1900**. The solid black dots shown in FIG. **26** are included to illustrate the points at which the grid dimension curves **1922-1932** connect, and do not form part of the antenna structure **1900**. The grid dimension curves **1922-1932** form three parallel electrical paths from a common feeding point **1936** to a common end point **1937**. More particularly, a first set of three grid dimension curves **1922, 1924, 1928** are each coupled together at the common feeding point **1936**. The other end points of the first set of grid dimension curves **1922, 1924, 1928** are each respectively coupled to one end point of a second set of three grid dimension curves **1932, 1926, 1930**, which converge together at the common end point **1937**.

[0089] In the illustrated embodiment, the first set of three grid dimension curves **1922, 1924, 1928** each define a first type of space-filling curve, called a Hilbert curve, and the second set of three grid dimension curves **1926, 1932, 1930** each define a second type of space-filling curve, called an SZ curve. It should be understood, however, that other embodiments coupled include other types of grid dimension curves.

[0090] FIG. **27** is a three-dimensional view of an exemplary miniature cylindrical slot antenna **2000**. The antenna **2000** includes a cylindrical conductor **2010** and a grid dimension curve **2012** that is defined by a slot through the surface of the conductor **2010**. More particularly, the grid dimension curve **2012** extends continuously from a first end point **2014** to a second end point **2016**. The antenna **2000** may, for example, be attached to a transmission medium at a feeding point on the cylindrical conductor **2010** to couple the antenna **2000** to transmitter and/or receiver circuitry. In addition, the length of the grid dimension curve **2012** may be pre-selected to help tune the operational frequency band of the antenna **2000**.

[0091] FIG. **28** is a three-dimensional view of an exemplary miniature antenna **2100** having an active radiating arm **2110** and a side-coupled parasitic radiating arm **2112**. Also illustrated are x, y, and z axes to help illustrate the orientation of the antenna **2100**. Both radiating arms **2110, 2112** are conductors that define grid dimension curves in, or parallel to, the xy plane, and are extruded in the direction of the z axis to define a width. The radiating arms **2110, 2112** may, for example, be visualized as conductive ribbons that are folded at points along their lengths to form three-dimensional representations of a grid dimension curve. More particularly, the active radiating arm **2110** includes a first end point **2114** and extends continuously in a grid dimension curve to a second end point **2116**. The parasitic radiating arm **2112** is separated from the active radiating arm **2110** by a pre-defined distance in the direction of the z axis, and extends continuously in a grid dimension curve from a first end point **2118** to a second end point **2120**. In addition, the shape of the active radiating arm **2110** is preferably the same or substantially the same as the shape of the parasitic radiating arm **2112**, such that an edge of the active radiating arm **2110** is parallel to an edge of the parasitic radiating arm **2112**.

[0092] Operationally, the antenna **2100** is fed at a point on the active radiating arm **2110** and is grounded at a point on the parasitic radiating arm **2112**. The distance between the active and parasitic radiating arms **2110, 2112** is selected to enable electromagnetic coupling between the two radiating arms **2110, 2112**, and may be used to tune impedance, VSWR, bandwidth, power efficiency, and other characteristics of the antenna **2100**. The operational characteristics of the antenna **2100**, such as the frequency band and power efficiency, may be tuned in part by selecting the length of the two grid dimension curves and the distance between the two radiating arms **2110, 2112**. For example, the degree of electromagnetic coupling between the radiating arms **2110, 2112** affects the effective volume of the antenna **2100** and may thus enhance the antenna's bandwidth.

[0093] FIG. **29** is a three-dimensional view of an exemplary miniature antenna **2200** having an active radiating arm **2210** and an inside-coupled parasitic radiating arm **2212**. Also illustrated are x, y, and z axes to help illustrate the orientation of the antenna **2200**. Both radiating arms **2210, 2212** are ribbon-like conductors that define grid dimension curves in the xy plane, and that are extruded in the direction of the z axis to define a width. More particularly, the active radiating arm **2210** forms a continuous grid dimension curve in the xy plane from a first end point **2214** to a second end point **2216**. Similarly, the parasitic radiating arm **2212** forms a continuous grid dimension curve in the xy plane from a first end point **2218** to a second end point **2220**, and is separated by a pre-defined distance from an inside surface of the active radiating arm **2212**.

[0094] Operationally, the antenna **2200** is fed at a point on the active radiating arm **2210** and is grounded at a point on the parasitic radiating arm **2212**. Similar to the antenna **2100** described above with reference to FIG. **28**, the operational characteristics of this antenna embodiment **2200** may be tuned in part by selecting the length of the grid dimension curves and the distance between the two radiating arms **2210, 2212**.

[0095] FIG. **30** is a three-dimensional view of an exemplary miniature antenna **2300** having active **2310** and parasitic **2312** radiating arms with electromagnetically coupled top-loading portions **2314, 2316**. Also illustrated are x, y, and z

axes to help illustrate the orientation of the antenna **2300**. Similar to the antenna structures **2210**, **2212** shown in FIG. **28**, the active **2310** and parasitic **2312** radiating arms in this embodiment **2300** are ribbon-like conductors that define grid dimension curves in, or parallel to, the xy plane, and that are extruded in the direction of the z axis to define a width. The active and parasitic radiating arms are separated by a pre-defined distance in the direction of the z axis. In addition, the antenna **2300** includes an active top-loading portion **2314** coupled to an end point of the active radiating arm **2310** and a parasitic top-loading portion **2316** coupled to an end point of the parasitic radiating arm **2312**. The active and parasitic top-loading portions **2314**, **2316** include planar conductors that are aligned parallel with the xz plane, and that are separated by a pre-defined distance in the direction of the y axis.

[0096] Operationally, the antenna **2300** is fed at a point on the active radiating arm **2310** and is grounded at a point on the parasitic radiating arm **2312**. The distance between the active **2314** and parasitic **2316** top-loading portions is selected to enable electromagnetic coupling between the two top-loading portions **2314**, **2316**. In addition, the distance between the active and parasitic radiating arms **2310**, **2312** may be selected to enable some additional amount of electromagnetic coupling between the active **2310**, **2314** and parasitic **2312**, **2316** sections of the antenna **2300**. As described above, the length of the grid dimension curves **2310**, **2312**, along with the degree of electromagnetic coupling between the active **2310**, **2314** and passive **2312**, **2316** sections of the antenna **2300**, affect the operational characteristics of the antenna **2300**, such as frequency band and power efficiency.

[0097] FIG. **31** shows one alternative embodiment **2400** of the miniature antenna **2300** of FIG. **30**. This antenna embodiment **2400** is similar to the antenna **2300** described above with reference to FIG. **30**, except that the active **2410** and parasitic **2412** radiating arms in this embodiment **2400** include planar conductors and the active **2414** and parasitic **2416** top-loading portions define grid dimension curves parallel to the xz plane. Similar to the antenna **2300** of FIG. **30**, the operational characteristics of this antenna embodiment **2400** are affected in large part by the length of the grid dimension curves **2414**, **2416** and the degree of electromagnetic coupling caused by the distance between the top-loading portions **2414**, **2416**.

[0098] FIG. **32** shows another alternative embodiment of the miniature antenna of FIG. **30**. This antenna embodiment **2500** is similar to the antennas **2300**, **2400** described above with reference to FIGS. **30** and **31**, except that both the radiating arms **2510**, **2512** and the top-loading portions **2514**, **2516** in this embodiment **2500** define grid dimension curves. The active **2510** and parasitic **2512** radiating arms define grid dimension curves in, or parallel to, the xy plane, similar to the radiating arms **2310**, **2312** shown in FIG. **30**. The active **2514** and parasitic **2516** top-loading portions define grid dimension curves parallel to the xz plane similar to the top-loading portions **2414**, **2416** shown in FIG. **31**. In addition, the operational characteristics of this antenna embodiment **2500** are similarly affected in large part by the distance between the top-loading portions **2514**, **2516** and the respective lengths of the grid dimension curves **2510**-**2516**.

[0099] FIG. **33** is a three-dimensional view of an exemplary top-loaded miniature antenna **2600**. The antenna includes a ribbon-like radiating arm **2610** that defines a grid dimension curve in the xy plane and that is extruded in the direction of the z axis to define a width. More particularly, the radiating

arm **2610** extends in the shape of a three-dimensional grid dimension curve from a first edge **2612** to a second edge **2614**. In addition, the antenna **2600** includes a top-loading portion **2616** coupled to the second edge **2614** of the radiating arm **2610**. The top-loading portion **2616** is a planar conductor that extends away from the second edge **2614** of the radiating arm **2610** in a direction parallel with the x axis, and is extruded in the direction of the z axis to define a width that is greater than the width of the radiating arm **2610**. The antenna **2600** is fed at a point on the radiating arm, preferably at or near the first edge **2612**, and has an operational frequency band that is defined in large part by the length of the grid dimension curve.

[0100] FIG. **34** is a three-dimensional view of an exemplary miniature antenna having two parallel radiating arms **2710**, **2712** with a common feeding portion **2714** and a common top-loading portion **2716**. Also illustrated are x, y, and z axes to help illustrate the orientation of the antenna. The parallel radiating arms **2710**, **2712** and the common feeding portion **2714** are each planar conductors aligned with, or parallel to, the xy axis, and the common top-loading portion **2716** is a planar conductor aligned parallel to the xz axis. The two radiating arms **2710**, **2712** are separated by a pre-defined distance along the z axis, and are each coupled to the common feeding portion **2714** at one end and to the common top-loading portion **2716** at the other end. Schematically, the antenna **2700** includes two parallel electrical paths through the parallel radiating arms **2710**, **2712** from the common feeding portion **2714** to the common top-loading portion **2716**.

[0101] In addition, both of the illustrated parallel radiating arms **2710**, **2712** includes three planar conductors **2718** and two winding conductors **2720**, with the winding conductors **2720** each defining a grid dimension curve. In other embodiments, however, varying proportions of the radiating arms **2710**, **2712** may be made up of one or more winding conductors **2720**. In this manner, the effective conductor length of the radiating arms **2710**, **2712**, and thus the operational frequency band of the antenna **2700**, may be altered by changing the proportion of the radiating arms **2710**, **2712** that are made up by winding conductors **2720**. The operational frequency band of the antenna **2700** may be further adjusted by changing the grid dimension of the winding conductors **2720**. In addition, various operational characteristics of the antenna **2700**, such as the frequency band and power efficiency, may also be tuned by varying the distance between the radiating arms **2710**, **2712**.

[0102] FIG. **35** is a three-dimensional view of an exemplary top-loaded two branch grid dimension curve antenna **2800**. The antenna **2800** includes a common feeding portion **2805**, two radiating arms **2810**, **2812**, and two top-loading portions **2814**, **2816**. The radiating arms **2810**, **2812** are ribbon-like conductors that each define a grid dimension curve **2818**, **2820** along a common plane. In addition, each radiating arm **2810**, **2812** is extruded in a direction perpendicular to the respective grid dimension curve **2818**, **2820** to define a width **2822**, **2824**, thus forming a three-dimensional representation of the grid dimension curve **2818**, **2820**. More particularly, the radiating arms **2810**, **2812** each include a bottom edge that is coupled to the common feeding portion **2805** and extend continuously in the shape of a grid dimension curve **2828**, **2820** to a top edge. The top edges of the radiating arms **2810**, **2812** are each coupled to one of the top-loading portions



**2814, 2816.** In addition, the radiating arms **2810, 2812** are separated from each other along their widths **2822, 2824** by a predetermined distance.

**[0103]** In operation, the frequency band of the antenna **2800** is defined in significant part by the respective lengths of the radiating arms **2810, 2812**. Thus, the antenna frequency band may be tuned by changing the effective conductor length of the grid dimension curves **2810, 2812**. This may be achieved, for example, by either increasing the overall length of the radiating arms **2810, 2812**, or increasing the grid dimension of the grid dimension curves **2810, 2812**. In addition, a larger bandwidth may be achieved by varying the lengths of the grid dimension curves **2818, 2820** from one radiating arm to another, such that the radiating arms **2810, 2812** resonate at slightly different frequencies. Similarly, a multi-band antenna may be achieved by varying the lengths of the radiating arms **2810, 2812** by a greater amount, such that the respective resonant frequencies do not result in overlapping frequency bands. It should be understood, however, that the antenna's operational characteristics, such as frequency band and power efficiency, may be altered by varying other physical characteristics of the antenna **2800**. For example, the impedance of the antenna may **2800** be affected by varying the distance between the two radiating arms **2810, 2812**.

**[0104]** FIG. 36 is a three-dimensional view of an exemplary top-loaded four branch grid dimension curve antenna **2900**. The antenna **2900** includes four radiating arms **2910-2916**, a common feeding portion **2918, 2919**, and a common top-loading portion **2920**. Each radiating arm **2910-2916** is a ribbon-like conductor that defines a planar grid dimension curve **2922** along an edge of the conductor **2910-2916**, and is extruded in a direction perpendicular to the plane of the grid dimension curve **2922** to define a width **2924** of the conductor **2910-2916**. In this manner, each radiating arm **2910-2916** forms a three-dimensional representation of a grid dimension curve. More particularly, the radiating arms **2910-2916** each include a bottom edge that is coupled to the common feeding portion **2918, 2919** and extend continuously in the shape of a grid dimension curve **2922** to a top edge coupled to the common top-loading portion **2920**. The common feeding portion includes a vertical section **2918** to couple the antenna **2900** to a transmission medium and a horizontal section **2929** coupled to the four radiating arms **2910-2916**.

**[0105]** The four radiating arms **2910-2916** lie in perpendicular planes along the edges of a rectangular array. Thus, the grid dimension curve **2922** in any radiating arm **2910** lies in the same plane as the grid dimension curve of one opposite radiating arm **2914** in the rectangular array, and lies in a perpendicular plane with two adjacent radiating arms **2912, 2916** in the rectangular array. The conductor width **2924** of any radiating arm **2910** lies in a parallel plane with the conductor width of one opposite radiating arm **2914**, and lies in perpendicular planes with the conductor widths of two adjacent radiating arms **2912, 2916**. In addition, each radiating arm **2910** is separated by a first pre-defined distance from the opposite radiating arm **2914** in the rectangular array and by a second pre-defined distance from the two adjacent radiating arms **2912, 2916** in the rectangular array.

**[0106]** In operation, the frequency band of the antenna **2900** is defined in significant part by the respective lengths of the radiating arms **2910-2916**. Thus, the antenna frequency band may be tuned by changing the effective conductor length of the grid dimension curves **2922** of the four radiating arms **2910-2916**. This may be achieved, for example, by

either increasing the overall length of the radiating arms **2910-2916** or increasing the grid dimension of the grid dimension curves **2922**. In addition, the antenna characteristics, such as frequency band and power efficiency, may also be affected by varying the first and second pre-defined distances between the four radiating arms **2910-2916**.

**[0107]** It should be understood that other embodiments of the miniature antenna **2900** shown in FIG. 36 may include a different number of radiating arms that extend radially from a common feeding point. As the number of radiating arms in the antenna **2900** is increased, the antenna structure tends to a revolution-symmetric structure having a radial cross-section that defines a grid dimension curve.

**[0108]** This written description uses examples to disclose the invention, including the best mode, and also to enable a person skilled in the art to make and use the invention. The patentable scope of the invention is defined by the claims, and may include other examples that occur to those skilled in the art. For example, each of the miniature monopole antenna structures described above could be mirrored to form a miniature dipole antenna. In another embodiment, a plurality of miniature antennas may be grouped to radiate together by means of a power splitting/combining network. Such a group of miniature antennas may, for example, be used as a directional array by separating the antennas within the group by a distance that is comparable to the operating wavelength, or may be used as a broadband antenna by spacing the antennas at smaller intervals. Embodiments of the miniature antenna may also be used interchangeably as either a transmitting antenna or a receiving antenna. Some possible applications for a miniature antenna include, for example, a radio or cellular antenna within an automobile, a communications antenna onboard a ship, an antenna within a cellular telephone or other wireless communications device, a high-power broadcast antenna, or other applications in which a small-dimensioned antenna may be desirable.

What is claimed is:

1. A miniature antenna comprising:
  - a radiating arm that defines a grid dimension curve within a plane of the antenna;
  - the radiating arm having a planar portion that defines the grid dimension curve; and
  - the radiating arm further having at least one extruded portion extending from the planar portion to define a three-dimensional structure.
2. The miniature antenna of claim 1, wherein the grid dimension curve defines a space-filling curve.
3. The miniature antenna of claim 1, wherein the grid dimension curve has a grid dimension greater than at least one of the following values: 1.2, 1.5, 1.65, and 1.9.
4. The miniature antenna of claim 1, wherein the radiating arm includes a feeding point to couple the antenna with a transmission medium.
5. The miniature antenna of claim 4, wherein the feeding point is located on the planar portion of the radiating arm.
6. The miniature antenna of claim 4, wherein the feeding point is located on the extruded portion of the radiating arm.
7. The miniature antenna of claim 1, wherein the radiating arm is coupled to a ground potential.
8. The miniature antenna of any of claim 1, wherein the extruded portion is located along a section of the planar portion having a high current density relative to other sections of the planar portion.

9. A miniature antenna comprising:  
a first radiating arm that defines a first grid dimension curve within a first plane; and  
a second radiating arm that defines a second grid dimension curve within a second plane.
10. The miniature antenna of claim 9, wherein the first and second grid dimension curves each define a space-filling curve.
11. The miniature antenna of claim 9, wherein the first and second grid dimension curves each have a grid dimension greater than at least one of the following values: 1.2, 1.5, 1.65 and 1.9.
12. The miniature antenna of claim 9, wherein at least one of the radiating arms includes a feeding point to coupled the antenna to a transmission medium.
13. The miniature antenna of claim 9, wherein:  
the first radiating arm includes a first dielectric substrate and the first grid dimension curve is defined by a first conductor attached to the first dielectric substrate; and  
the second radiating arm includes a second dielectric substrate and the second grid dimension curve is defined by a second conductor attached to the second dielectric substrate.
14. The miniature antenna of claim 12, wherein the first radiating arm is an active radiating arm that includes the

feeding point and the second radiating arm is a parasitic radiating arm that is coupled to a ground potential.

15. The miniature antenna of claim 14, wherein the parasitic radiating arm is a solid conductor that defines a slot, and wherein the slot in the parasitic radiating arm defines the second grid dimension curve.

16. The miniature antenna of claim 14, wherein the first radiating arm is electromagnetically coupled to the second radiating arm.

17. A miniature antenna comprising:  
a radiating arm that defines at least one grid dimension curve;  
the radiating arm forming a non-planar structure; and  
the radiating arm including a feeding point to coupled the antenna to a transmission medium.

18. The miniature antenna of claim 17, wherein the grid dimension curve defines a space-filling curve.

19. The miniature antenna of claim 17, wherein the grid dimension curve has a grid dimension greater than at least one of the following values: 1.2, 1.5, 1.65 and 1.9.

20. The miniature antenna of claim 17, wherein the radiating arm forms a cylindrical structure.

\* \* \* \* \*