



(11) **EP 2 264 829 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
22.12.2010 Bulletin 2010/51

(51) Int Cl.:
H01Q 1/24 ^(2006.01) **H01Q 1/36** ^(2006.01)
H01Q 1/38 ^(2006.01) **H01Q 5/00** ^(2006.01)

(21) Application number: **10180806.1**

(22) Date of filing: **16.10.2001**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**

• **Soler Castany, Jordi**
08190, SANT CUGAT DEL VALLES (Barcelona)
(ES)

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
06018550.1 / 1 732 162
01274550.1 / 1 444 751

(74) Representative: **Carpintero Lopez, Francisco**
Herrero & Asociados, S.L.
Alcalá 35
28014 Madrid (ES)

(71) Applicant: **Fractus, S.A.**
08190 San Cugat Del Valles (Barcelona) (ES)

Remarks:
This application was filed on 28-09-2010 as a
divisional application to the application mentioned
under INID code 62.

(72) Inventors:
• **Puente Baliarda, Carles**
08190, SANT CUGAT DEL VALLES (Barcelona)
(ES)

(54) **Loaded antenna**

(57) A novel loaded antenna is defined in the present
invention. The radiating element of the loaded antenna
consists of two different parts: a conducting surface and
a loading structure. By means of this configuration, the

antenna provides a small and multiband performance,
and hence it features a similar behaviour through differ-
ent frequency bands.

EP 2 264 829 A1

Description

OBJECT OF THE INVENTION

[0001] The present invention relates to a novel loaded antenna which operates simultaneously at several bands and featuring a smaller size with respect to prior art antennas.

[0002] The radiating element of the novel loaded antenna consists on two different parts: a conducting surface with a polygonal, space-filling or multilevel shape; and a loading structure consisting on a set of strips connected to said first conducting surface.

[0003] The invention refers to a new type of loaded antenna which is mainly suitable for mobile communications or in general to any other application where the integration of telecom systems or applications in a single small antenna is important.

BACKGROUND OF THE INVENTION

[0004] The growth of the telecommunication sector, and in particular, the expansion of personal mobile communication systems are driving the engineering efforts to develop multiservice (multifrequency) and compact systems which require multifrequency and small antennas. Therefore, the use of a multisystem small antenna with a multiband and/or wideband performance, which provides coverage of the maximum number of services, is nowadays of notable interest since it permits telecom operators to reduce their costs and to minimize the environmental impact.

[0005] Most of the multiband reported antenna solutions use one or more radiators or branches for each band or service. An example is found in U.S. Patent No. 09/129176 entitled "Multiple band, multiple branch antenna for mobile phone".

[0006] One of the alternatives which can be of special interest when looking for antennas with a multiband and/or small size performance are multilevel antennas, Patent WO0122528 entitled "Multilevel Antennas", and miniature space-filling antennas, Patent WO0154225 entitled "Space-filling miniature antennas".

[0007] A variety of techniques used to reduce the size of the antennas can be found in the prior art. In 1886, there was the first example of a loaded antenna; that was, the loaded dipole which Hertz built to validate Maxwell equations.

[0008] A.G. Kandoian (A.G.Kandoian, "Three new antenna types and their applications, Proc. IRE, vol. 34, pp. 70W-75W, February 1946) introduced the concept of loaded antennas and demonstrated how the length of a quarter wavelength monopole can be reduced by adding a conductive disk at the top of the radiator. Subsequently, Goubau presented an antenna structure top-loaded with several capacitive disks interconnected by inductive elements which provided a smaller size with a broader bandwidth, as is illustrated in U.S. Patent No.3,967,276

entitled "Antenna structures having reactance at free end".

[0009] More recently, U.S. Patent No.5,847,682 entitled "Top loaded triangular printed antenna" discloses a triangular-shaped printed antenna with its top connected to a rectangular strip. The antenna features a low-profile and broadband performance. However, none of these antenna configurations provide a multiband behaviour. In Patent IVo. WO0122528 entitled "Multilevel Antennas", another patent of the present inventors, there is a particular case of a top-loaded antenna with an inductive loop, which was used to miniaturize an antenna for a dual frequency operation. Also, W.Dou and W.Y.M.Chia (W.Dou and W.Y.M.Chia, "Small broadband stacked planar monopole", Microwave and Optical Technology Letters, vol. 27, pp. 288-289, November 2000) presented another particular antecedent of a top-loaded antenna with a broadband behavior. The antenna was a rectangular monopole top-loaded with one rectangular arm connected at each of the tips of the rectangular shape. The width of each of the rectangular arms is on the order of the width of the fed element, which is not the case of the present invention.

SUMMARY OF THE INVENTION

[0010] The key point of the present invention is the shape of the radiating element of the antenna, which consists on two main parts: a conducting surface and a loading structure. Said conducting surface has a polygonal, space-filling or multilevel shape and the loading structure consists on a conducting strip or set of strips connected to said conducting surface. According to the present invention, at least one loading strip must be directly connected at least at one point on the perimeter of said conducting surface. Also, circular or elliptical shapes are included in the set of possible geometries of said conducting surfaces since they can be considered polygonal structures with a large number of sides.

[0011] Due to the addition of the loading structure, the antenna can feature a small and multiband, and sometimes a multiband and wideband, performance. Moreover, the multiband properties of the loaded antenna (number of bands, spacing between bands, matching levels, etc) can be adjusted by modifying the geometry of the load and/or the conducting surface.

[0012] This novel loaded antenna allows to obtain a multifrequency performance, obtaining similar radioelectric parameters at several bands.

[0013] The loading structure can consist for instance on a single conducting strip. In this particular case, said loading strip must have one of its two ends connected to a point on the perimeter of the conducting surface (i.e., the vertices or edges). The other tip of said strip is left free in some embodiments while, in other embodiments it is also connected at a point on the perimeter of said conducting surface.

[0014] The loading structure can include not only a sin-

gle strip but also a plurality of loading strips located at different locations along its perimeter.

[0015] The geometries of the loads that can be connected to the conducting surface according to the present invention are:

- a) A curve composed by a minimum of two segments and a maximum of nine segments which are connected in such a way that each segment forms an angle with their neighbours, i.e., no pair of adjacent segments define a larger straight segment.
- b) A straight segment or strip
- c) A straight strip with a polygonal shape
- d) A space-filling curve, Patent No. PCT/ES00/00411 entitled "Space-filling miniature antennas".

[0016] In some embodiments, the loading structure described above is connected to the conducting surface while in other embodiments, the tips of a plurality of the loading strips are connected to other strips. In those embodiments where a new loading strip is added to the previous one, said additional load can either have one tip free of connection, or said tip connected to the previous loading strip, or both tips connected to previous strip or one tip connected to previous strip and the other tip connected to the conducting surface.

[0017] There are three types of geometries that can be used for the conducting surface according to the present invention:

- a) A polygon (i.e., a triangle, square, trapezoid, pentagon, hexagon, etc. or even a circle or ellipse as a particular case of polygon with a very large number of edges).
- b) A multilevel structure, Patent No. WO0122528 entitled "Multilevel Antennas".
- c) A solid surface with an space-filling perimeter.

[0018] In some embodiments, a central portion of said conducting surface is even removed to further reduce the size of the antenna. Also, it is clear to those skilled in the art that the multilevel or space-filling designs in configurations b) and c) can be used to approximate, for instance, ideal fractal shapes.

[0019] Fig.1 and Fig.2 show some examples of the radiating element for a loaded antenna according to the present invention. In drawings 1 to 3 the conducting surface is a trapezoid while in drawings 4 to 7 said surface is a triangle. It can be seen that in these cases, the conducting surface is loaded using different strips with different lengths, orientations and locations around the perimeter of the trapezoid, Fig.1. Besides, in these examples the load can have either one or both of its ends connected to the conducting surface, Fig.2.

[0020] The main advantage of this novel loaded antenna is two-folded:

- The antenna features a multiband or wideband performance, or a combination of both.
- Given the physical size of radiating element, said antenna can be operated at a lower frequency than most of the prior art antennas.

[0021] Some aspects of the invention are the following aspects A1-A24:

A1.- A loaded antenna characterized in that the radiating element includes at least two parts, first part consisting on at least one conducting surface, second part being a loading structure, said loading structure consisting on at least a conducting strip, wherein at least one of said strips are connected at least at one point on the edge of said first conducting surface, and wherein the maximum width of said strip or strips is smaller than a quarter of the longest edge of first conducting surface.

A2.- A loaded antenna according to aspect A1 **characterized in that** the radiating element includes at least two parts, first part consisting on a conducting surface, second part being a loading structure, said loading structure consisting on at least a conducting strip, wherein the two tips of at least one of the conducting strips are connected at two points on the perimeter of said first conducting surface.

A3.- A loaded antenna according to aspect A1 or A2 wherein said first conducting surface and second loading structure are lying on the same flat or curved surface.

A4.- A loaded antenna according to aspect A1, A2 or A3 comprising a conducting surface and at least a first and a second strip, wherein said first strip is connected at least at one point on the perimeter of said conducting surface, and wherein said second strip is connected at least by means of one of its tips to said first conducting strip.

A5.- A loaded antenna according to aspect A1, A2, A3 or A4 wherein the antenna includes at least a second conducting surface, said second surface featuring a smaller area than first conducting surface, and wherein at least one conducting strip is connected to first conducting surface at one end, and to second conducting surface at the other end

A6.- A loaded antenna including a conducting surface and a loading structure according to aspect A1, A2, A3, A4 or A5 wherein the perimeter of said conducting surface is shaped chosen from the following set: triangular, square, rectangular, trapezoidal, pentagonal, hexagonal, heptagonal, octagonal, circular or elliptical.

A7.- A loaded antenna including a conducting surface and a loading structure according to aspect A1, A2, A3, A4 or A5 wherein at least a portion of said conducting surface is a multilevel structure.

5

A8.- A loaded antenna including a conducting surface and a loading structure according to aspect A1, A2, A3, A4, A5, A6 or A7 wherein the shape of at least one loading strip is a curve composed by a minimum of two segments and a maximum of nine segments which are connected in such a way that each segment forms an angle with their neighbours, i.e., no pair of adjacent segments define a larger straight segment.

10

A9.- A loaded antenna including a conducting surface and a loading structure according to aspect A1, A2, A3, A4, A5, A6 or A7 wherein the loading structure includes at least one straight strip, said strip having one end connected to a point on the edge of said conducting surface.

15

20

A10.- A loaded antenna including a conducting surface and a loading structure according to aspect A1, A2, A3, A4, A5, A6 or A7 wherein the shape of at least one loading strip is a space-filling curve.

25

A11.- A loaded antenna including a conducting surface and a loading structure according to aspect A1, A2, A3, A4, A5, A6 or A7 wherein at least one loading strip is a straight strip with a polygonal shape.

30

A12.- A loaded antenna including a conducting surface and a loading structure according to aspect A1, A2, A3, A4, A5, A6 or A7 wherein the loading structure includes at least two strips, with the first strip with one tip free of connection, or connected to the second strip, or both tips connected to the second strip or one tip connected to the second strip and the other tip connected to the conducting surface.

35

40

A13.- A loaded antenna including a conducting surface and a loading structure according to aspect A1, A2, A3, A4, A5, A6 or A7 wherein the loading structure consists on two or more strips connected at several points on the perimeter of said conducting surface.

45

A14.- A loaded antenna according to aspect A5, A6 or A7 wherein at least the second conducting surface includes a loading structure according to aspect A8, A9, A10, A11, A12 or A13.

50

A15.- A loaded antenna including a conducting surface and a loading structure according to aspect A1, A2, A3, A4, A5, A6, A7, A8, A9, A10, A11, A12, A13 or A14 wherein a central portion of the conducting surface is removed.

55

A16.- A loaded antenna according to aspect A1, A2, A3, A4, A5, A6, A7, A8, A9, A10, A11, A12, A13, A14 or A15 wherein the antenna is a monopole, said monopole including a ground-plane or ground-counterpoise and a radiating element, said element including at least a conducting surface and a loading structure.

A17.- A loaded antenna according to aspects A1, A2, A3, A4, A5, A6, A7, A8, A9, A10, A11, A12, A13, A14 or A15 wherein the antenna is a dipole including two arms, said arms including at least a conducting surface and a loading structure.

A18.- A loaded antenna according to aspects A16 or A17 where the radiating element is printed on one of the sides of a dielectric substrate and the load has a conducting surface on the other side of the substrate.

A19.- A loaded antenna according to aspects A1, A2, A3, A4, A5, A6, A7, A8, A9, A10, A11, A12, A13, A14 or A15 wherein the antenna is a microstrip patch antenna and wherein the radiating patch of said antenna includes a conducting surface and a loading structure.

A20.- A loaded antenna according to any of the preceding aspects, **characterized in that** the antenna features a multiband behavior, a broadband behavior or a combination of both.

A21.- A loaded antenna according to any of the preceding aspects, **characterized in that** the antenna is shorter than a quarter of the central operating wavelength.

A22.- A loaded antenna wherein the antenna is an aperture or slot antenna **characterized in that** the shape of the slot or aperture is the same as any of the shapes of the radiating elements of the loaded antennas described in the preceding aspects.

A23.- A loaded antenna radiating element described in any of the preceding aspects which shape is used in at least one of the selective elements on a frequency selective surface.

A24.- A loaded antenna according to any of the preceding aspects, **characterized in that** the geometry of the surface, the loading structure or both are shaped by means of one or a combination of the following mathematical algorithms: Iterated Function Systems, Multi Reduction Copy Machine, Networked Multi Reduction Copy Machine.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022]

Fig.1 shows a trapezoid antenna loaded in three different ways using the same structure; in particular, a straight strip. In case 1, one straight strip, the loading structure (1a) and (1b), is added at each of the tips of the trapezoid, the conducting surface (1c). Case 2 is the same as case 1, but using strips with a smaller length and located at a different position around the perimeter of the conducting surface. Case 3, is a more general case where several strips are added to two different locations on the conducting surface. Drawing 4 shows a example of a non-symmetric loaded structure and drawing 5 shows an element where just one slanted strip has been added at the top of the conducting surface. Finally, cases 6 and 7 are examples of geometries loaded with a strip with a triangular and rectangular shape and with different orientations. In these cases, the loads have only one of their ends connected to the conducting surface.

Fig. 2 shows a different particular configuration where the loads are curves which are composed by a maximum of nine segments in such a way that each segment forms an angle with their neighbours, as it has been mentioned before. Moreover, in drawings 8 to 12 the loads have both of their ends connected to the conducting surface. Drawings 8 and 9, are two examples where the conducting surface is side-loaded. Cases 13 and 14, are two cases where a rectangle is top-loaded with an open-ended curve, shaped as is mentioned before, with the connection made through one of the tips of the rectangle. The maximum width of the loading strips is smaller than a quarter of the longest edge of the conducting surface.

Fig.3 shows a square structure top-loaded with three different space-filling curves. The curve used to load the square geometry, case 16, is the well-known Hilbert curve.

Fig.4 shows three examples of the top-loaded antenna, where the load consist of two different loads that are added to the conducting surface. In drawing 19, a first load, built with three segments, is added to the trapezoid and then a second load is added to the first one.

Fig. 5 includes some examples of the loaded antenna where a central portion of the conducting surface is even removed to further reduce the size of the antenna.

Fig. 6 shows the same loaded antenna described in

Fig.1, but in this case as the conducting surface a multilevel structure is used.

Fig.7 shows another example of the loaded antenna, similar to those described in Fig.2. In this case, the conducting surface consist of a multilevel structure. Drawings 31,32, 34 and 35 use different shapes for the loading but in all cases the load has both ends connected to the conducting surface. Case 33 is an example of an open-ended load added to a multilevel conducting surface.

Fig.8 presents some examples of the loaded antenna, similar to those depicted in Fig.3 and 4, but using a multilevel structure as the conducting surface. Illustrations 36, 37 and 38, include a space-filling top-loading curve, while the rest of the drawings show three examples of the top-loaded antenna with several levels of loadings. Drawing 40 is an example where three loads have been added to the multilevel structure. More precisely, the conducting surface is firstly loaded with curve (40a), next with curves (40b) and (40c). Curve (40a) has both ends connected to conducting surface, curve (40b) has both ends connected to the previous load (40a), and load (40c), formed with two segments, has one end connected to load (40a) and the other to the load (40b).

Fig.9 shows three cases where the same multilevel structure, with the central portions of the conducting surface removed, which is loaded with three different type of loads; those are, a space-filling curve, a curve with a minimum of two segments and a maximum of nine segments connected in such a way mentioned just before, and finally a load with two similar levels.

Fig.10 shows two configurations of the loaded antenna which include three conducting surfaces, one of them bigger than the others. Drawing 45 shows a triangular conducting surface (45a) which is connected to two smaller circular conducting surfaces (45b) and (45c) through one conducting strip (45d) and (45e). Drawing 46 is a similar configuration to drawing 45 but the bigger conducting surface is a multilevel structure.

Fig.11 shows other particular cases of the loaded antenna. They consist of a monopole antenna comprising a conducting or superconducting ground plane (48) with an opening to allocate a coaxial cable (47) with its outer conductor connected to said ground plane and the inner conductor connected to the loaded antenna. The loaded radiator can be optionally placed over a supporting dielectric (49).

Fig.12 shows a top-loaded polygonal radiating element (50) mounted with the same configuration as the antenna in Fig. 12. The radiating element radiator

can be optionally placed over a supporting dielectric (49). The lower drawing shows a configuration wherein the radiating element is printed on one of the sides of a dielectric substrate (49) and also the load has a conducting surface on the other side of the substrate (51).

Fig.13 shows a particular configuration of the loaded antenna. It consists of a dipole wherein each of the two arms includes two straight strip loads. The lines at the vertex of the small triangles (50) indicate the input terminal points. The two drawings display different configurations of the same basic dipole; in the lower drawing the radiating element is supported by a dielectric substrate (49).

Fig.14 shows, in the upper drawing, an example of the same dipole antenna side-loaded with two strips but fed as an aperture antenna. The lower drawing is the same loaded structure wherein the conductor defines the perimeter of the loaded geometry.

Fig.15 shows a patch antenna wherein the radiating element is a multilevel structure top-loaded with two strip arms, upper drawing. Also, the figure shows an aperture antenna wherein the aperture (59) is practiced on a conducting or superconducting structure (63), said aperture being shaped as a loaded multilevel structure.

Fig.16 shows a frequency selective surface wherein the elements that form the surface are shaped as a multilevel loaded structure.

DETAILED DESCRIPTION OF SOME PREFERRED EMBODIMENTS

[0023] A preferred embodiment of the loaded antenna is a monopole configuration as shown in Fig.11. The antenna includes a conducting or superconducting counterpoise or ground plane (48). A handheld telephone case, or even a part of the metallic structure of a car or train can act as such a ground counterpoise. The ground and the monopole arm (here the arm is represented with the loaded structure (26), but any of the mentioned loaded antenna structure could be taken instead) are excited as usual in prior art monopole by means of, for instance, a transmission line (47). Said transmission line is formed by two conductors, one of the conductors is connected to the ground counterpoise while the other is connected to a point of the conducting or superconducting loaded structure. In Fig.11, a coaxial cable (47) has been taken as a particular case of transmission line, but it is clear to any skilled in the art that other transmission lines (such as for instance a microstrip arm) could be used to excite the monopole. Optionally, and following the scheme just described, the loaded monopole can be printed over a dielectric substrate (49).

[0024] Another preferred embodiment of the loaded antenna is a monopole configuration as shown in Fig.12. The assembly of the antenna (feeding scheme, ground plane, etc) is the same as the considered in the embodiment described in Fig.11. In the present figure, there is another example of the loaded antenna. More precisely, it consists of a trapezoid element top-loaded with one of the mentioned curves. In this case, one of the main differences is that, being the antenna edged on dielectric substrate, it also includes a conducting surface on the other side of the dielectric (51) with the shape of the load. This preferred configuration allows to miniaturize the antenna and also to adjust the multiband parameters of the antenna, such as the spacing the between bands.

Fig.13 describes a preferred embodiment of the invention. A two-arm antenna dipole is constructed comprising two conducting or superconducting parts, each part being a side-loaded multilevel structure. For the sake of clarity but without loss of generality, a particular case of the loaded antenna (26) has been chosen here; obviously, other structures, as for instance, those described in Fig. 2,3,4,7 and 8, could be used instead. Both, the conducting surfaces and the loading structures are lying on the same surface. The two closest apexes of the two arms form the input terminals (50) of the dipole. The terminals (50) have been drawn as conducting or superconducting wires, but as it is clear to those skilled in the art, such terminals could be shaped following any other pattern as long as they are kept small in terms of the operating wavelength. The skilled in the art will notice that, the arms of the dipoles can be rotated and folded in different ways to finely modify the input impedance or the radiation properties of the antenna such as, for instance, polarization.

[0025] Another preferred embodiment of a loaded dipole is also shown in Fig.13 where the conducting or superconducting loaded arms are printed over a dielectric substrate (49); this method is particularly convenient in terms of cost and mechanical robustness when the shape of the applied load packs a long length in a small area and when the conducting surface contains a high number of polygons, as happens with multilevel structures. Any of the well-known printed circuit fabrication techniques can be applied to pattern the loaded structure over the dielectric substrate. Said dielectric substrate can be, for instance, a glass-fibre board, a teflon based substrate (such as Cuclad®) or other standard radiofrequency and microwave substrates (as for instance Rogers 4003® or Kapton®). The dielectric substrate can be a portion of a window glass if the antenna is to be mounted in a motor vehicle such as a car, a train or an airplane, to transmit or receive radio, TV, cellular telephone (GSM900, GSM1800, UMTS) or other communication services electromagnetic waves. Of course, a balun network can be connected or integrated at the input terminals of the dipole to balance the current distribution among the two dipole arms.

[0026] The embodiment (26) in Fig.14 consist on an aperture configuration of a loaded antenna using a mul-

tilevel geometry as the conducting surface. The feeding techniques can be one of the techniques usually used in conventional aperture antennas. In the described figure, the inner conductor of the coaxial cable (53) is directly connected to the lower triangular element and the outer conductor to the rest of the conductive surface. Other feeding configurations are possible, such as for instance a capacitive coupling.

[0027] Another preferred embodiment of the loaded antenna is a slot loaded monopole antenna as shown in the lower drawing in Fig. 14. In this figure the loaded structure forms a slot or gap (54) impressed over a conducting or superconducting sheet (52). Such sheet can be, for instance, a sheet over a dielectric substrate in a printed circuit board configuration, a transparent conductive film such as those deposited over a glass window to protect the interior of a car from heating infrared radiation, or can even be a part of the metallic structure of a handheld telephone, a car, train, boat or airplane. The feeding scheme can be any of the well known in conventional slot antennas and it does not become an essential part of the present invention. In all said two illustrations in Fig. 14, a coaxial cable has been used to feed the antenna, with one of the conductors connected to one side of the conducting sheet and the other connected at the other side of the sheet across the slot. A microstrip transmission line could be used, for instance, instead of a coaxial cable.

[0028] Another preferred embodiment is described in Fig. 15. It consists of a patch antenna, with the conducting or superconducting patch (58) featuring the loaded structure (the particular case of the loaded structure (59) has been used here but it is clear that any of the other mentioned structures could be used instead). The patch antenna comprises a conducting or superconducting ground plane (61) or ground counterpoise, and the conducting or superconducting patch which is parallel to said ground plane or ground counterpoise. The spacing between the patch and the ground is typically below (but not restricted to) a quarter wavelength. Optionally, a low-loss dielectric substrate (60) (such as glass-fibre, a teflon substrate such as Cuclad® or other commercial materials such as Rogers4003®) can be placed between said patch and ground counterpoise. The antenna feeding scheme can be taken to be any of the well-known schemes used in prior art patch antennas, for instance: a coaxial cable with the outer conductor connected to the ground plane and the inner conductor connected to the patch at the desired input resistance point (of course the typical modifications including a capacitive gap on the patch around the coaxial connecting point or a capacitive plate connected to the inner conductor of the coaxial placed at a distance parallel to the patch, and so on, can be used as well); a microstrip transmission line sharing the same ground plane as the antenna with the strip capacitively coupled to the patch and located at a distance below the patch, or in another embodiment with the strip placed below the ground plane and coupled to the patch through

a slot, and even a microstrip line with the strip co-planar to the patch. All these mechanisms are well known from prior art and do not constitute an essential part of the present invention. The essential part of the invention is the loading shape of the antenna which contributes to enhance the behavior of the radiator to operate simultaneously at several bands with a small size performance.

[0029] The same Fig. 15 describes another preferred embodiment of the loaded antenna. It consists of an aperture antenna, said aperture being characterized by its loading added to a multilevel structure, said aperture being impressed over a conducting ground plane or ground counterpoise, said ground plane consisting, for example, of a wall of a waveguide or cavity resonator or a part of the structure of a motor vehicle (such as a car, a lorry, an airplane or a tank). The aperture can be fed by any of the conventional techniques such as a coaxial cable (61), or a planar microstrip or strip-line transmission line, to name a few.

[0030] Another preferred embodiment is described in Fig. 16. It consists of a frequency selective surface (63). Frequency selective surfaces are essentially electromagnetic filters, which at some frequencies they completely reflect energy while at other frequencies they are completely transparent. In this preferred embodiment the selective elements (64), which form the surface (63), use the loaded structure (26), but any other of the mentioned loaded antenna structures can be used instead. At least one of the selective elements (64) has the same shape of the mentioned loaded radiating elements. Besides this embodiment, another embodiment is preferred; this is, a loaded antenna where the conducting surface or the loading structure, or both, are shaped by means of one or a combination of the following mathematical algorithms: Iterated Function Systems, Multi Reduction Copy Machine, Networked Multi Reduction Copy Machine.

Claims

1. A loaded antenna **characterized in that** the radiating element includes at least two parts, first part consisting on at least one conducting surface, second part being a loading structure, said loading structure consisting on at least a conducting strip, wherein at least one of said strips are connected at least at one point on the edge of said first conducting surface, and wherein the maximum width of said strip or strips is smaller than a quarter of the longest edge of first conducting surface.
2. A loaded antenna according to claim 1 **characterized in that** the radiating element includes at least two parts, first part consisting on a conducting surface, second part being a loading structure, said loading structure consisting on at least a conducting strip, wherein the two tips of at least one of the conducting strips are connected at two points on the

- perimeter of said first conducting surface.
3. A loaded antenna according to claim 1 or 2 wherein said first conducting surface and second loading structure are lying on the same flat or curved surface. 5
 4. A loaded antenna according to claim 1,2 or 3 comprising a conducting surface and at least a first and a second strip, wherein said first strip is connected at least at one point on the perimeter of said conducting surface, and wherein said second strip is connected at least by means of one of its tips to said first conducting strip. 10
 5. A loaded antenna according to claim 1,2,3 or 4 wherein the antenna includes at least a second conducting surface, said second surface featuring a smaller area than first conducting surface, and wherein at least one conducting strip is connected to first conducting surface at one end, and to second conducting surface at the other end 15
 6. A loaded antenna including a conducting surface and a loading structure according to claim 1,2,3,4 or 5 wherein the perimeter of said conducting surface is shaped chosen from the following set: triangular, square, rectangular, trapezoidal, pentagonal, hexagonal, heptagonal, octagonal, circular or elliptical. 20
 7. A loaded antenna including a conducting surface and a loading structure according to claim 1,2,3,4 or 5 wherein at least a portion of said conducting surface is a multilevel structure. 25
 8. A loaded antenna including a conducting surface and a loading structure according to claim 1,2,3,4,5,6 or 7 wherein the shape of at least one loading strip is a curve composed by a minimum of two segments and a maximum of nine segments which are connected in such a way that each segment forms an angle with their neighbours, i.e., no pair of adjacent segments define a larger straight segment. 30
 9. A loaded antenna including a conducting surface and a loading structure according to claim 1,2,3,4,5,6 or 7 wherein the loading structure includes at least one straight strip, said strip having one end connected to a point on the edge of said conducting surface. 35
 10. A loaded antenna including a conducting surface and a loading structure according to claim 1,2,3,4,5,6 or 7 wherein the shape of at least one loading strip is a space-filling curve. 40
 11. A loaded antenna including a conducting surface and a loading structure according to claim 1,2,3,4,5,6 or 7 wherein at least one loading strip is a straight strip with a polygonal shape. 45
 12. A loaded antenna including a conducting surface and a loading structure according to claim 1,2,3,4,5,6 or 7 wherein the loading structure includes at least two strips, with the first strip with one tip free of connection, or connected to the second strip, or both tips connected to the second strip or one tip connected to the second strip and the other tip connected to the conducting surface. 50
 13. A loaded antenna including a conducting surface and a loading structure according to claim 1,2,3,4,5,6 or 7 wherein the loading structure consists on two or more strips connected at several points on the perimeter of said conducting surface. 55
 14. A loaded antenna according to claim 5,6 or 7 wherein at least the second conducting surface includes a loading structure according to claim 8,9,10,11,12 or 13.
 15. A loaded antenna including a conducting surface and a loading structure according to claim 1,2,3,4,5,6,7,8,9,10,11,12,13 or 14 wherein a central portion of the conducting surface is removed.
 16. A loaded antenna according to claims 1,2,3,4,5,6,7,8,9,10,11,12,13,14 or 15 wherein the antenna is a monopole, said monopole including a ground-plane or ground-counterpoise and a radiating element, said element including at least a conducting surface and a loading structure.
 17. A loaded antenna according to claims 1,2,3,4,5,6,7,8,9,10,11,12,13,14 or 15 wherein the antenna is a dipole including two arms, said arms including at least a conducting surface and a loading structure.
 18. A loaded antenna according to claims 16 or 17 where the radiating element is printed on one of the sides of a dielectric substrate and the load has a conducting surface on the other side of the substrate.
 19. A loaded antenna according to claims 1,2,3,4,5,6,7,8,9,10,11,12,13,14 or 15 wherein the antenna is a microstrip patch antenna and wherein the radiating patch of said antenna includes a conducting surface and a loading structure.
 20. A loaded antenna according to any of the preceding claims, **characterized in that**
 - the antenna features a multiband behavior, a broadband behavior or a combination of both; and/or **characterized in that**
 - the antenna is shorter than a quarter of the central operating wavelength.

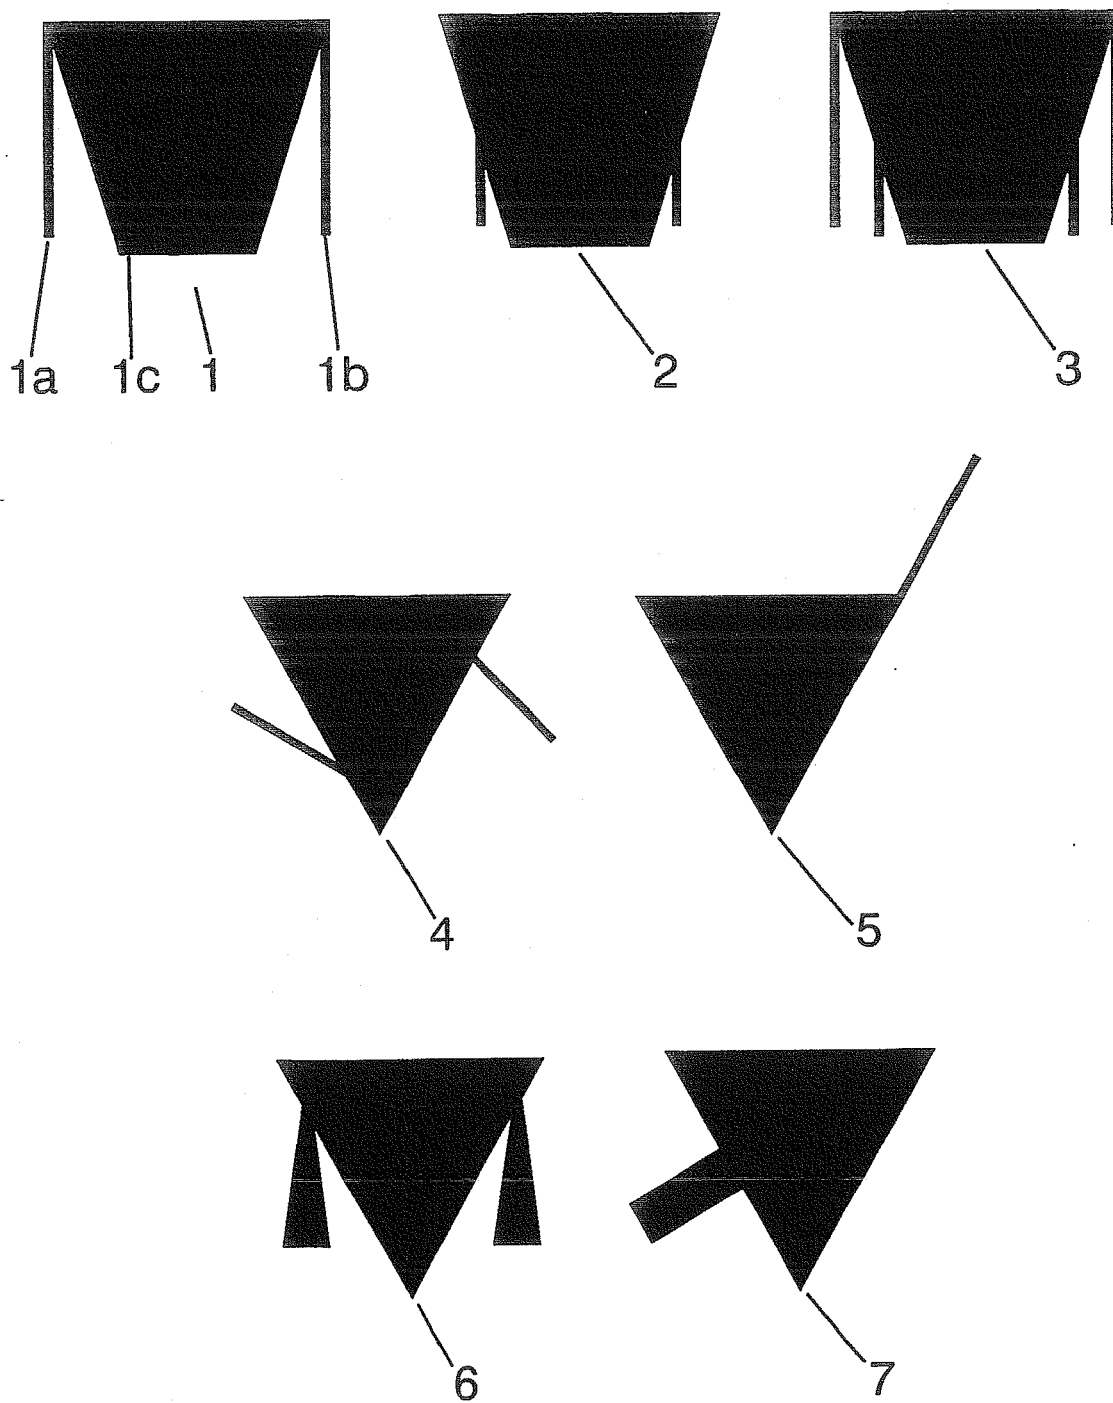


FIG.1

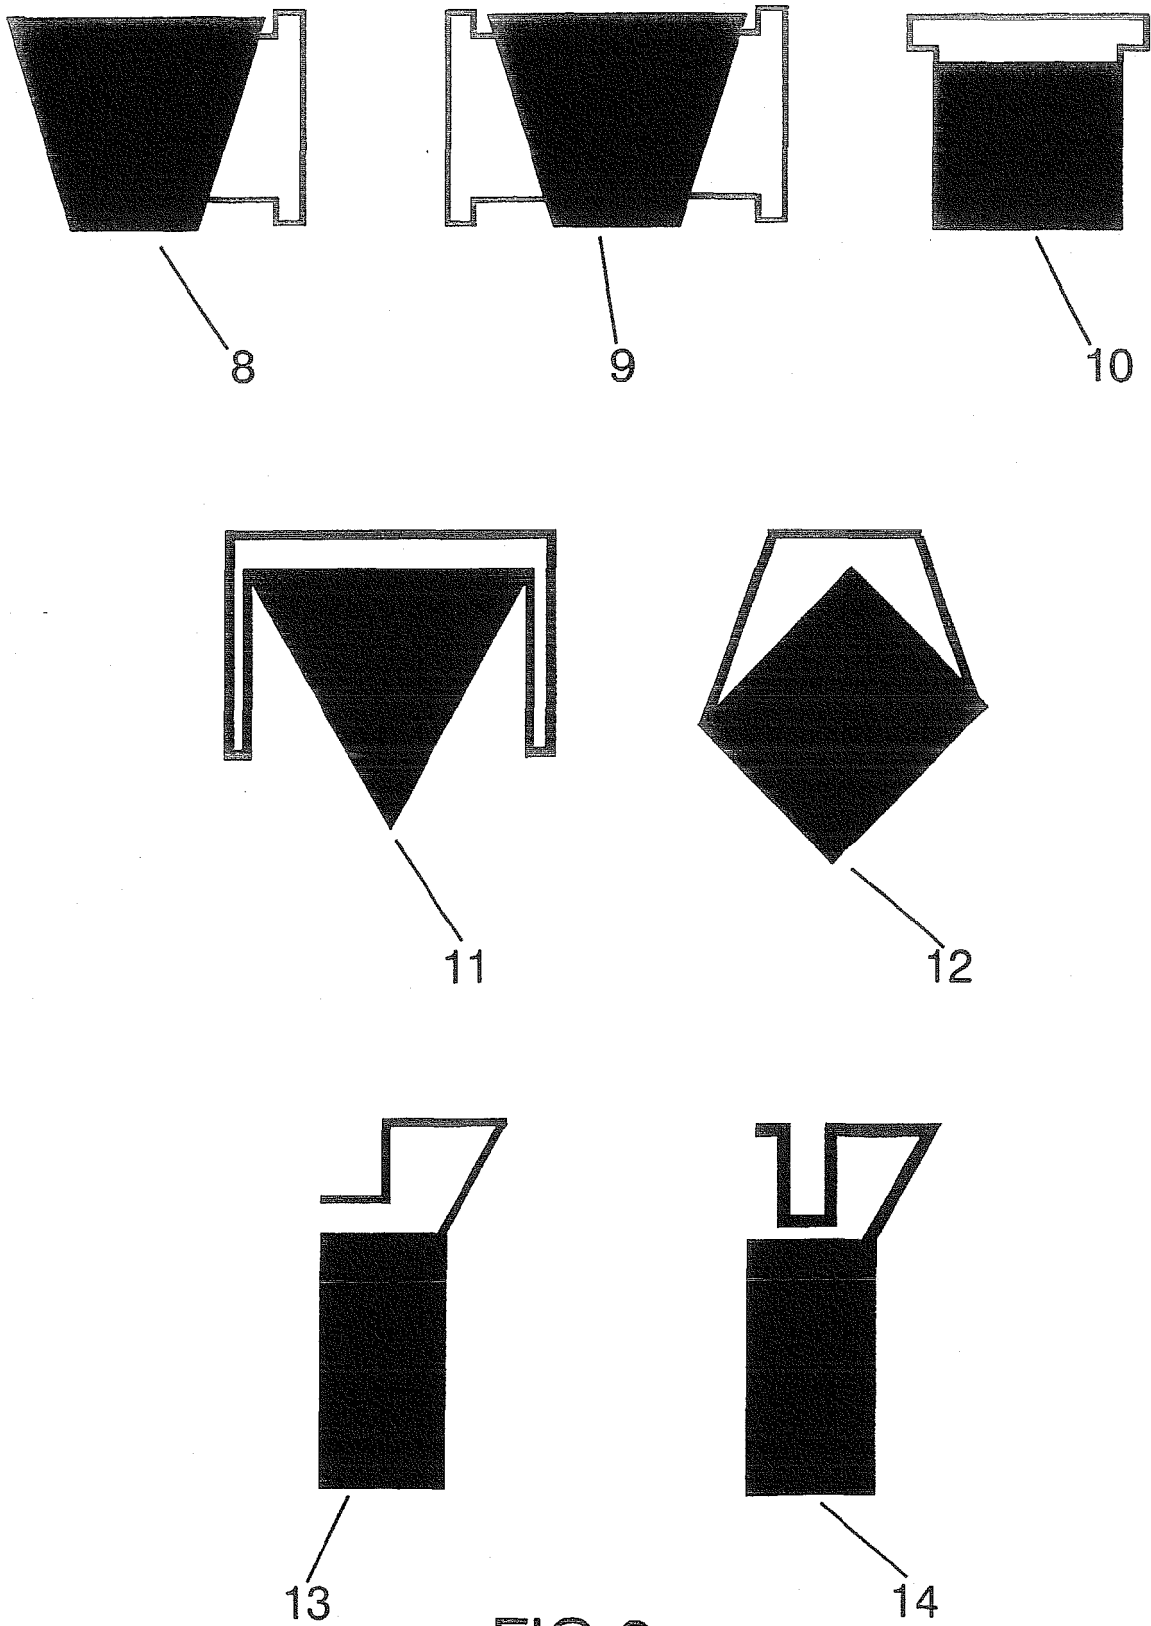


FIG.2

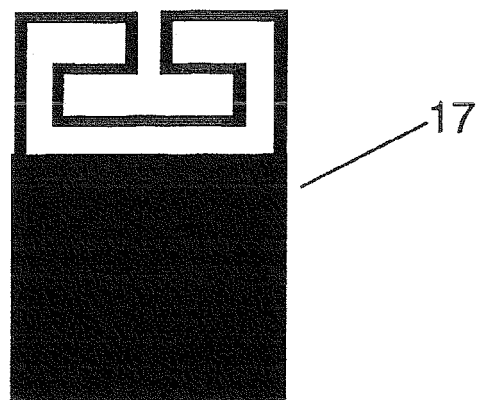
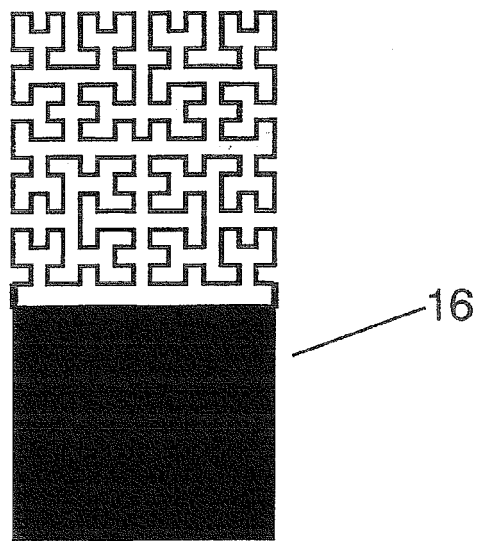
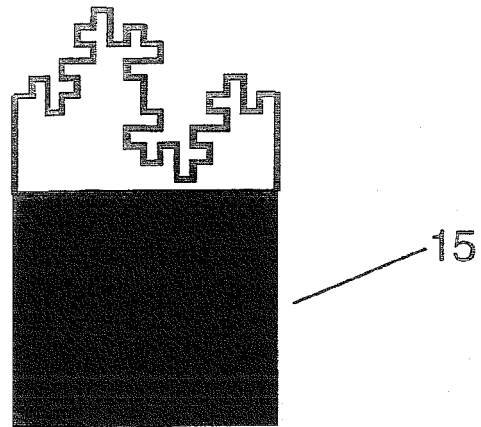


FIG.3

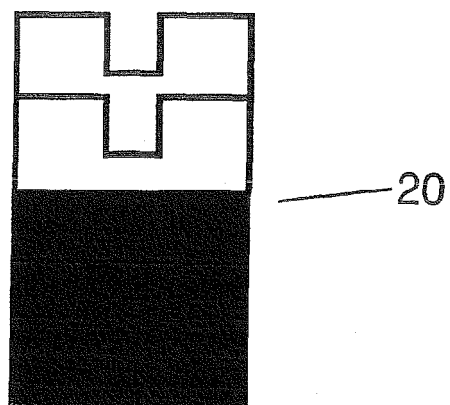
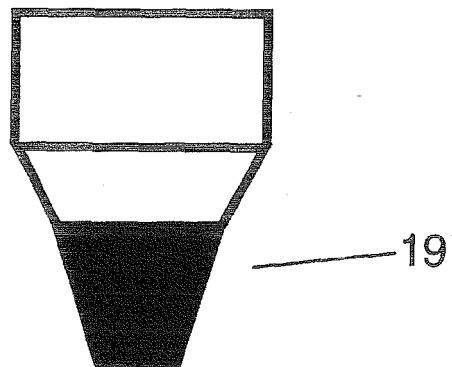
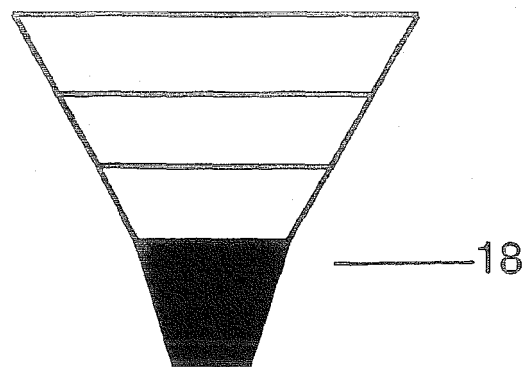


FIG.4

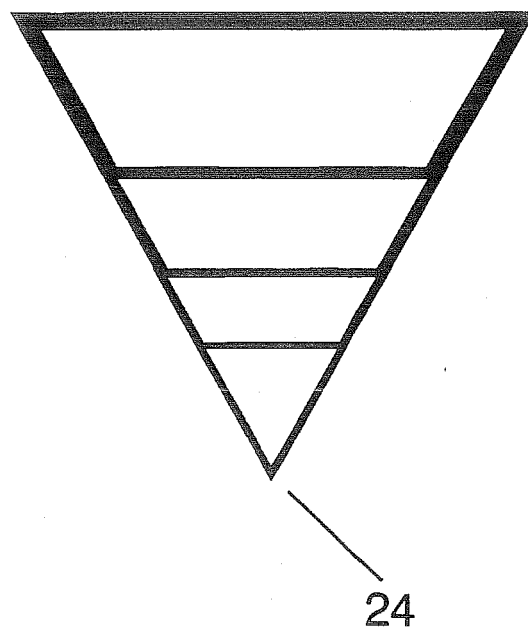
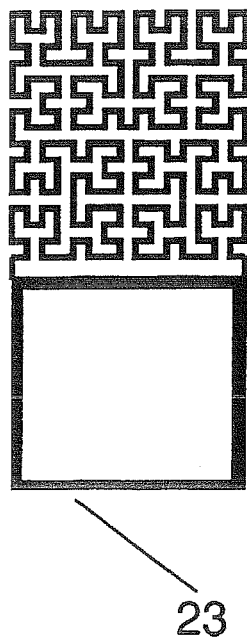
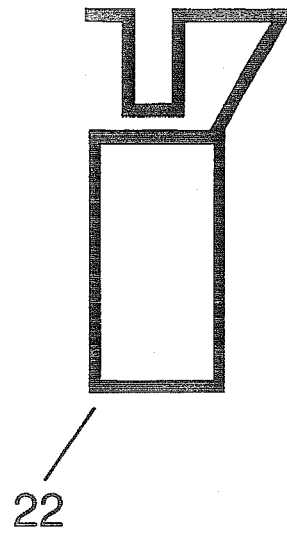
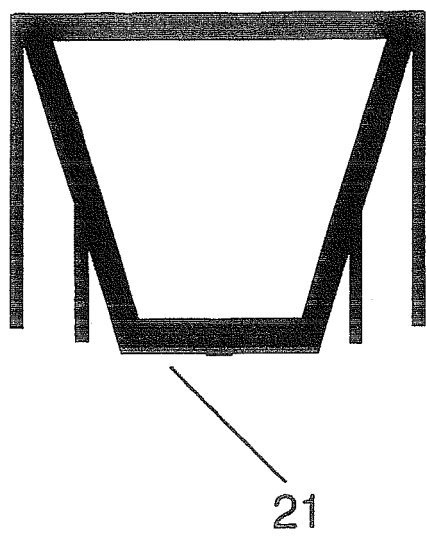


FIG.5

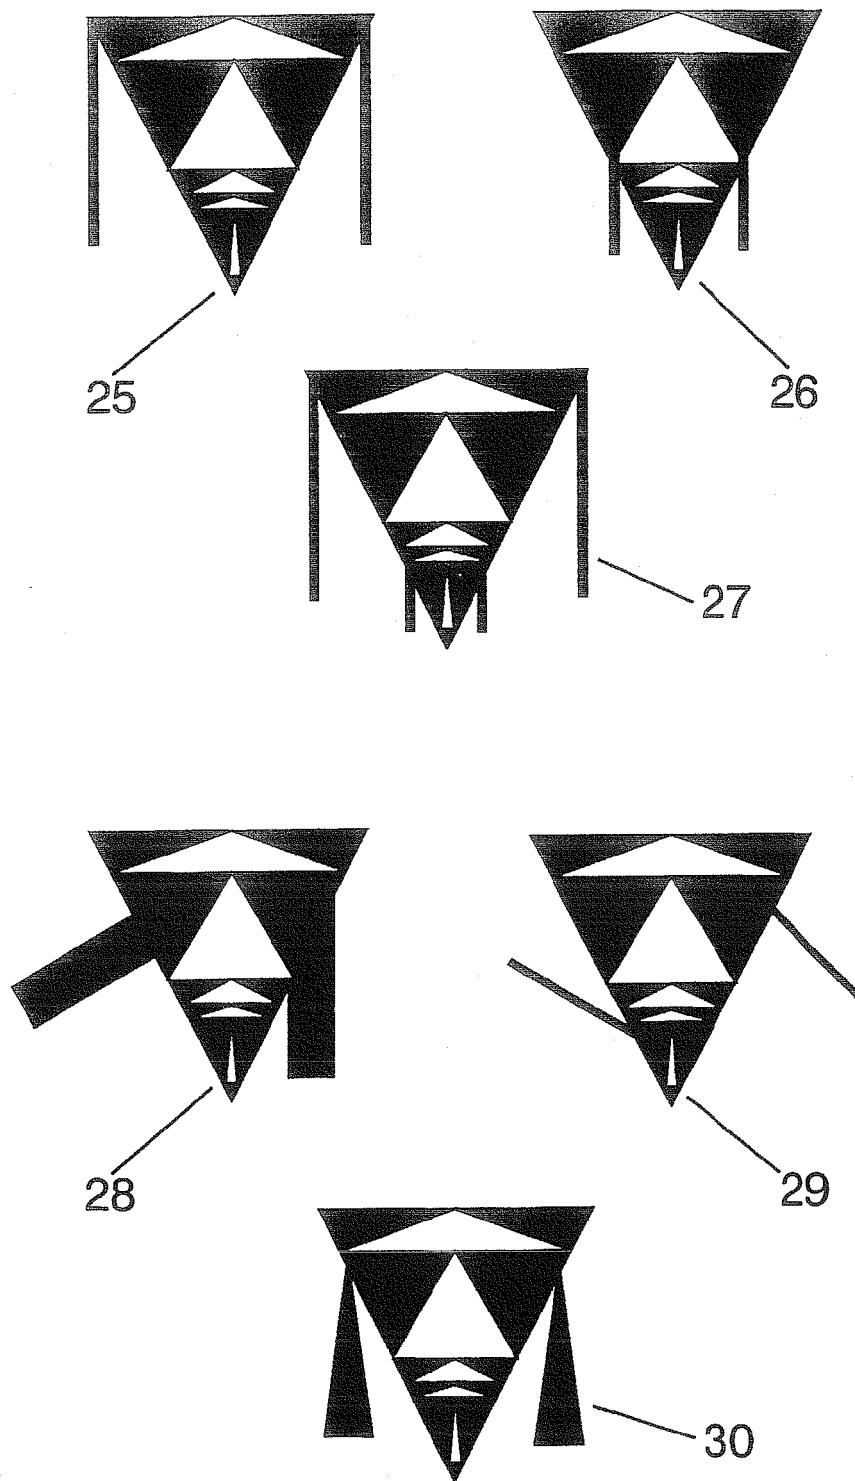


FIG. 6

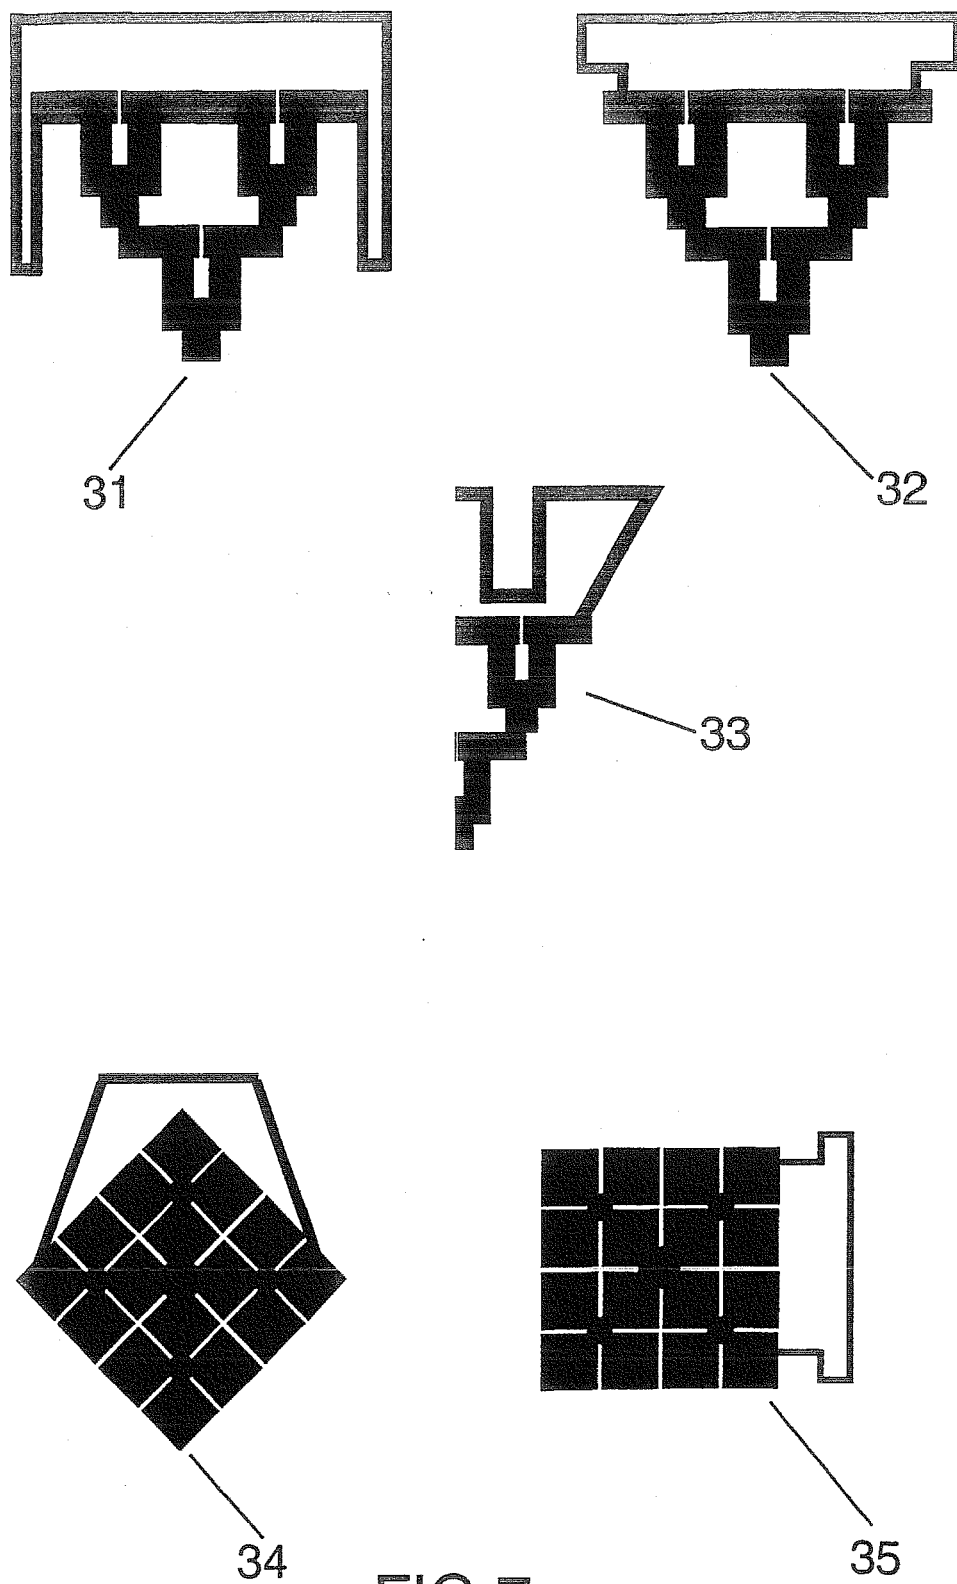


FIG. 7

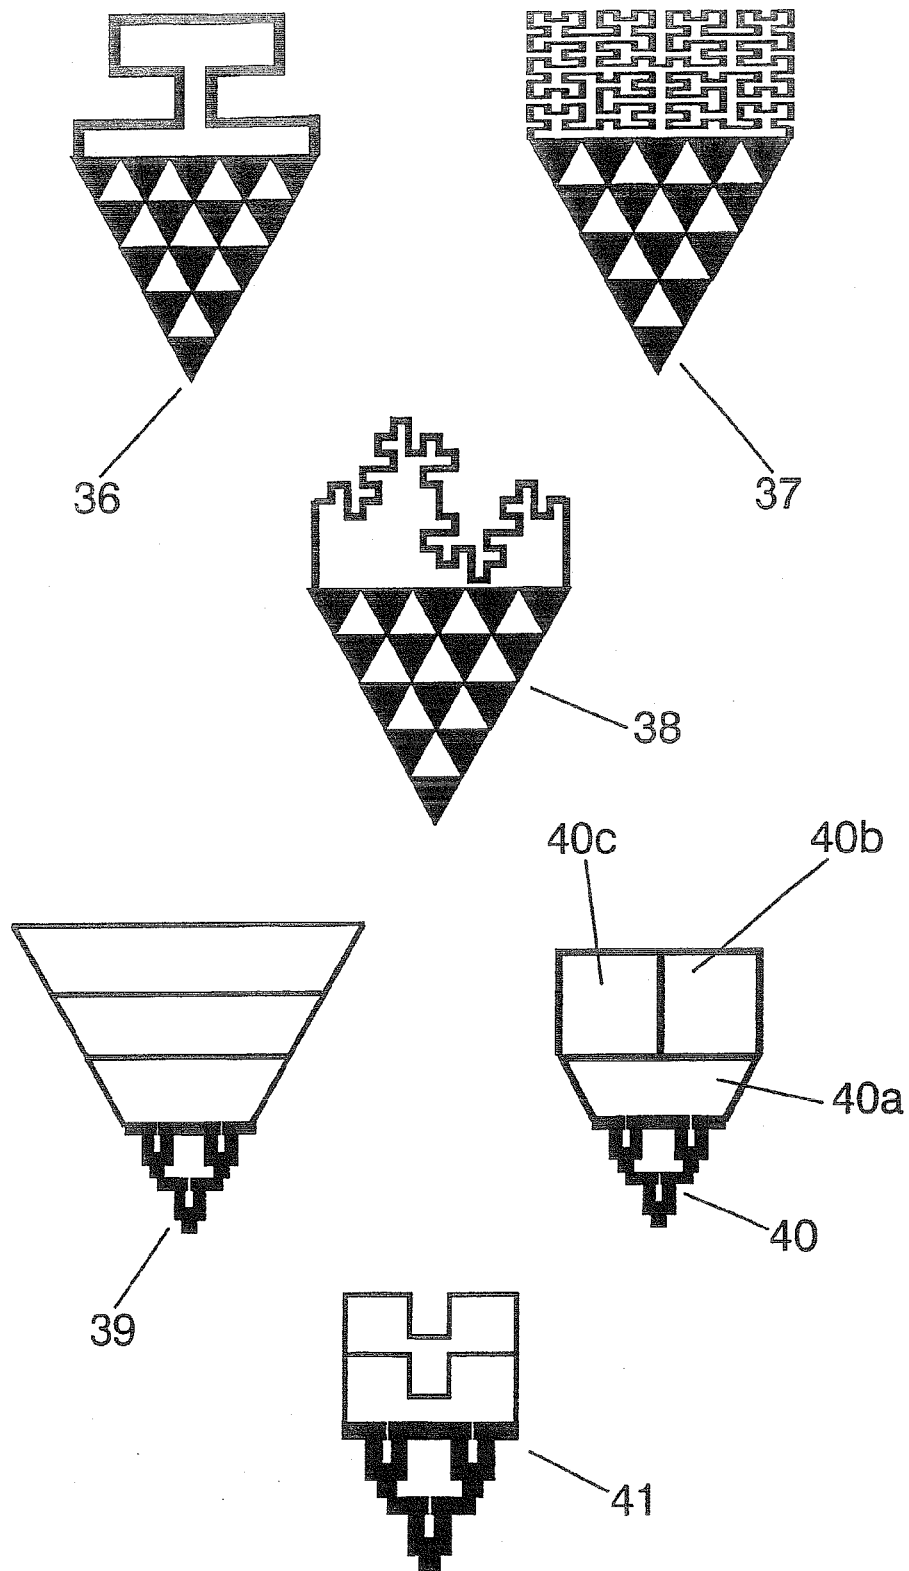


FIG. 8

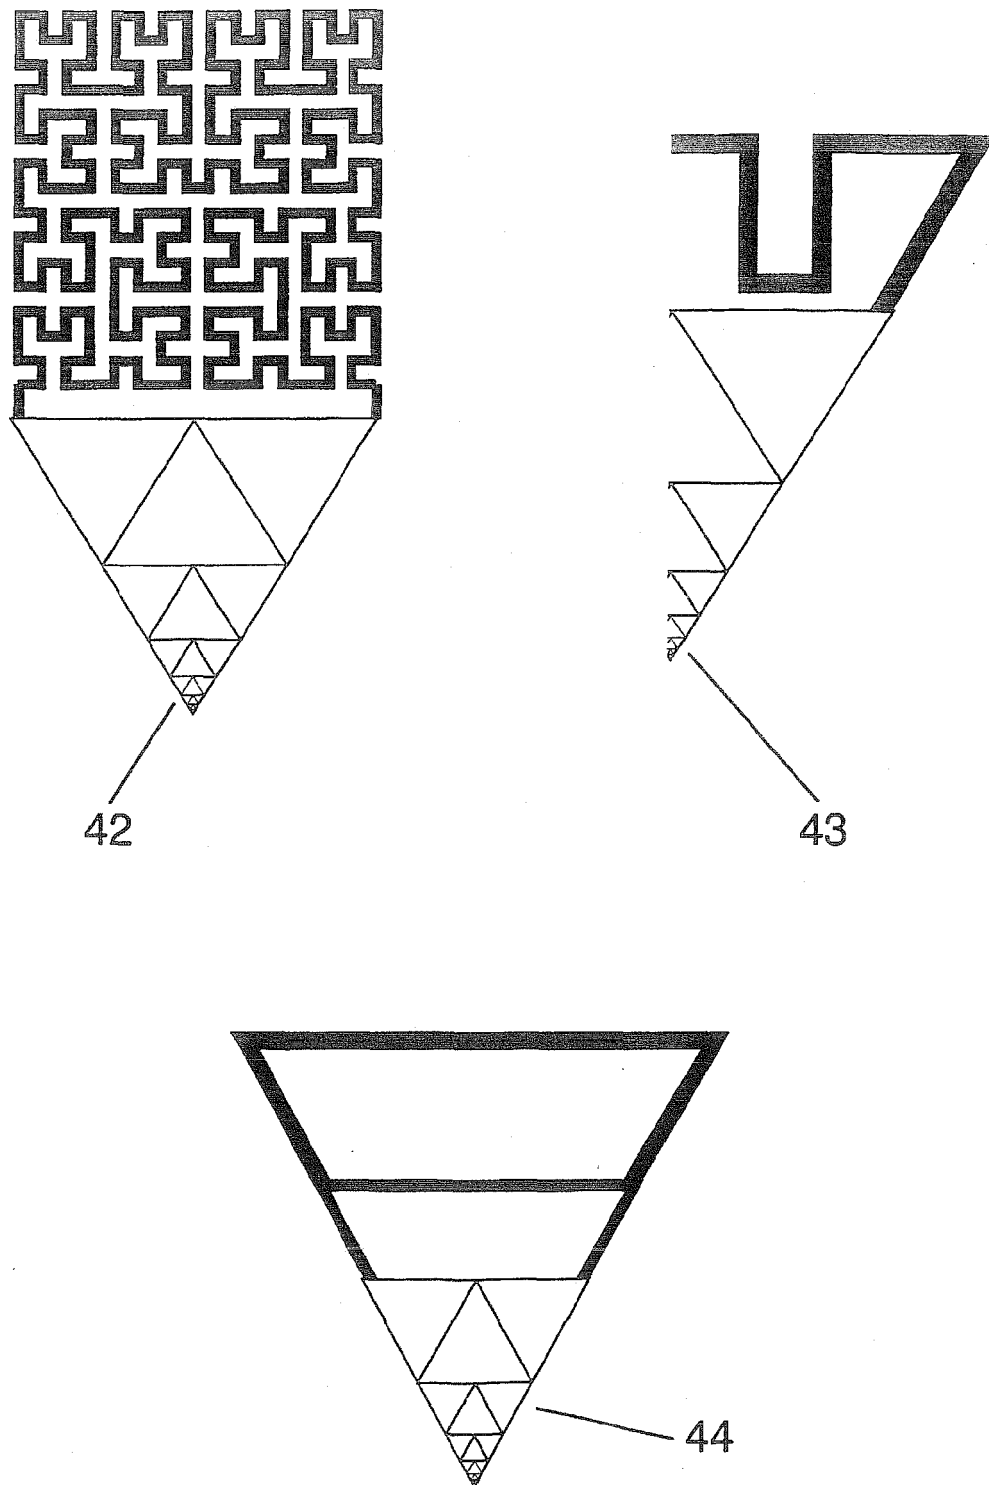


FIG.9

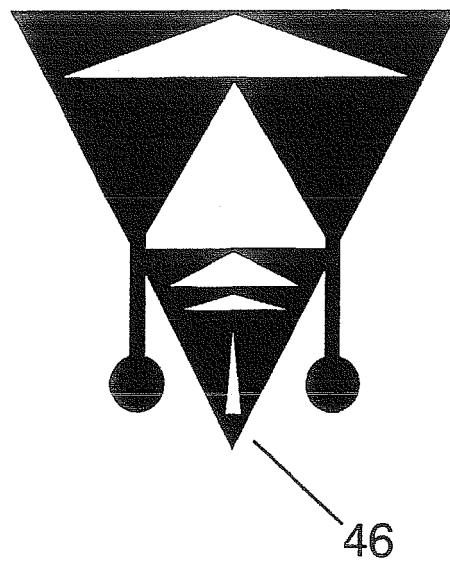
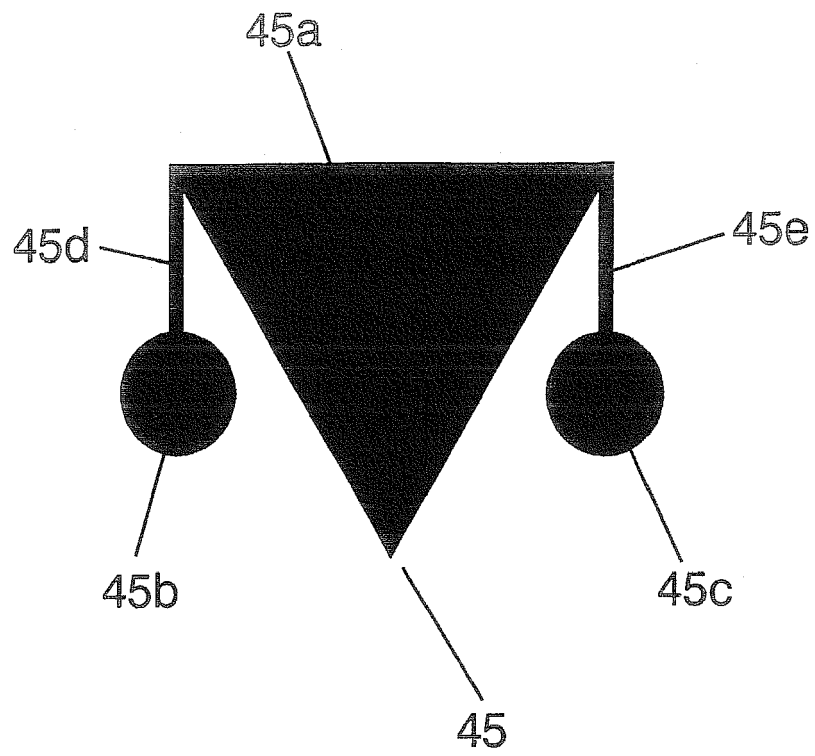


FIG.10

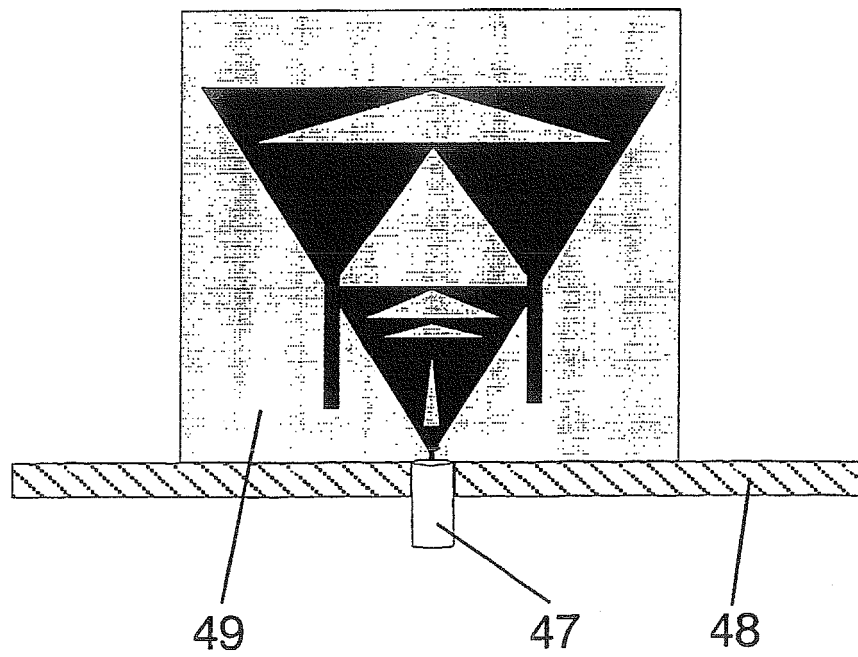
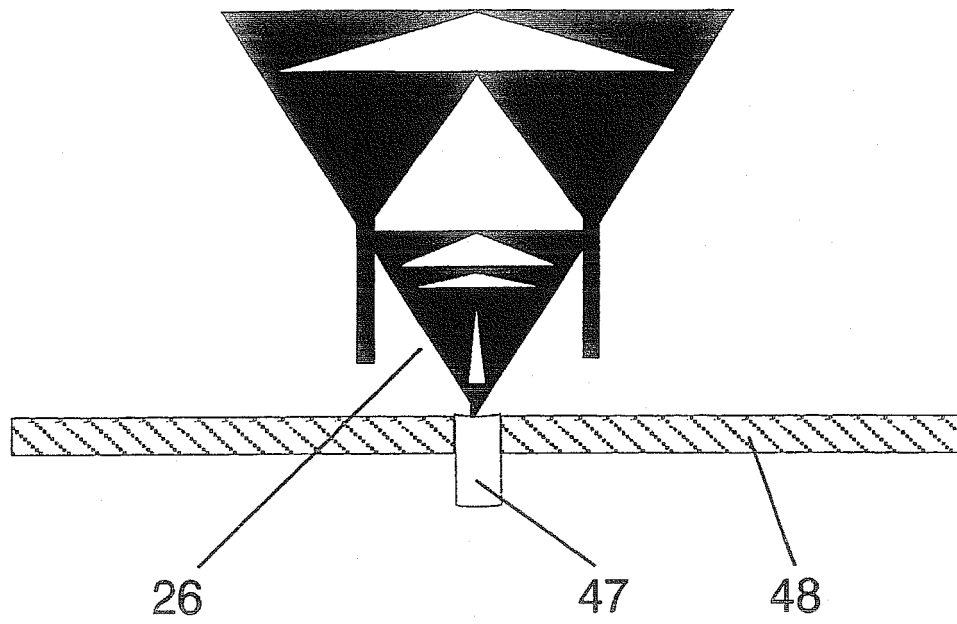


FIG.11

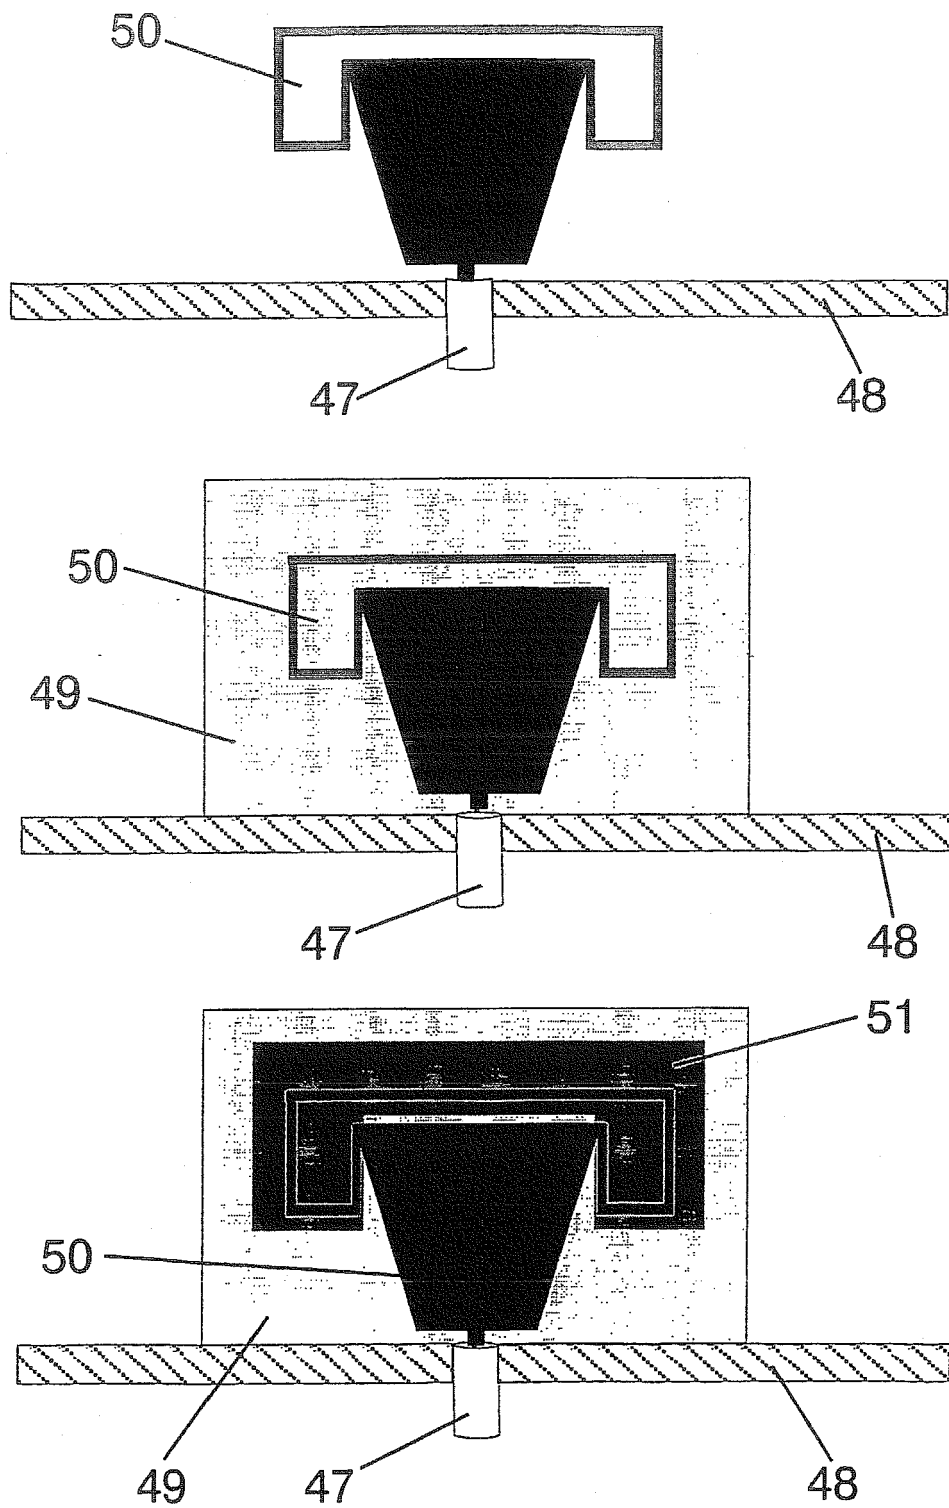


FIG.12

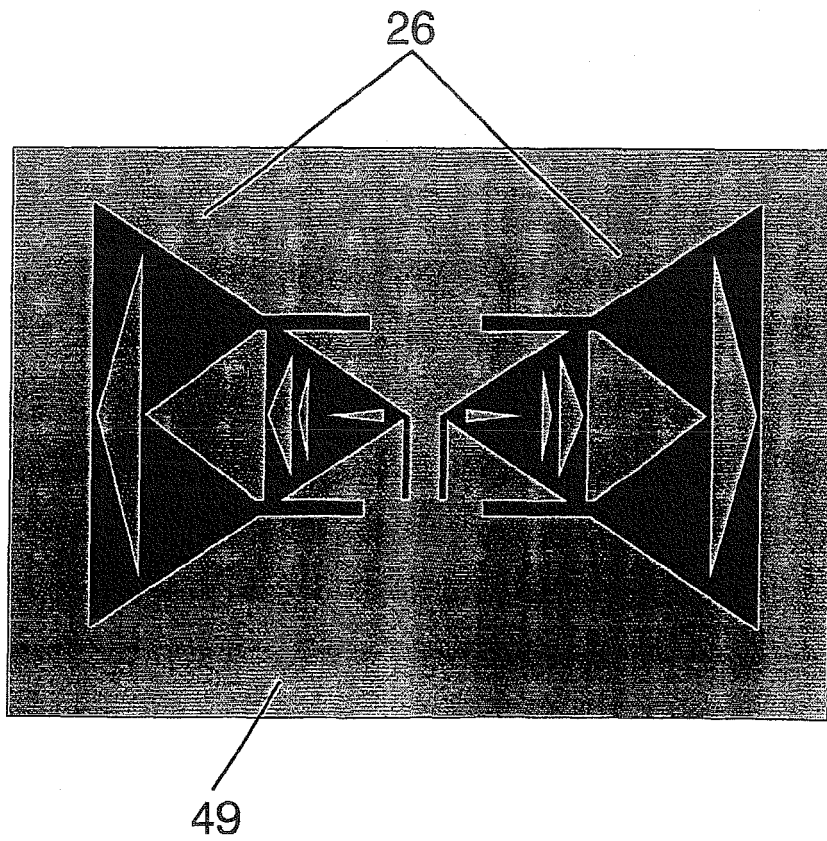
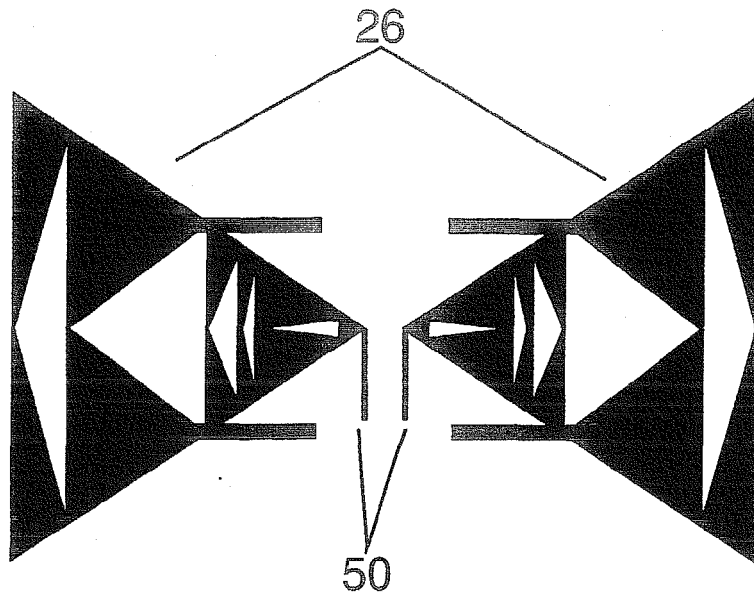


FIG.13

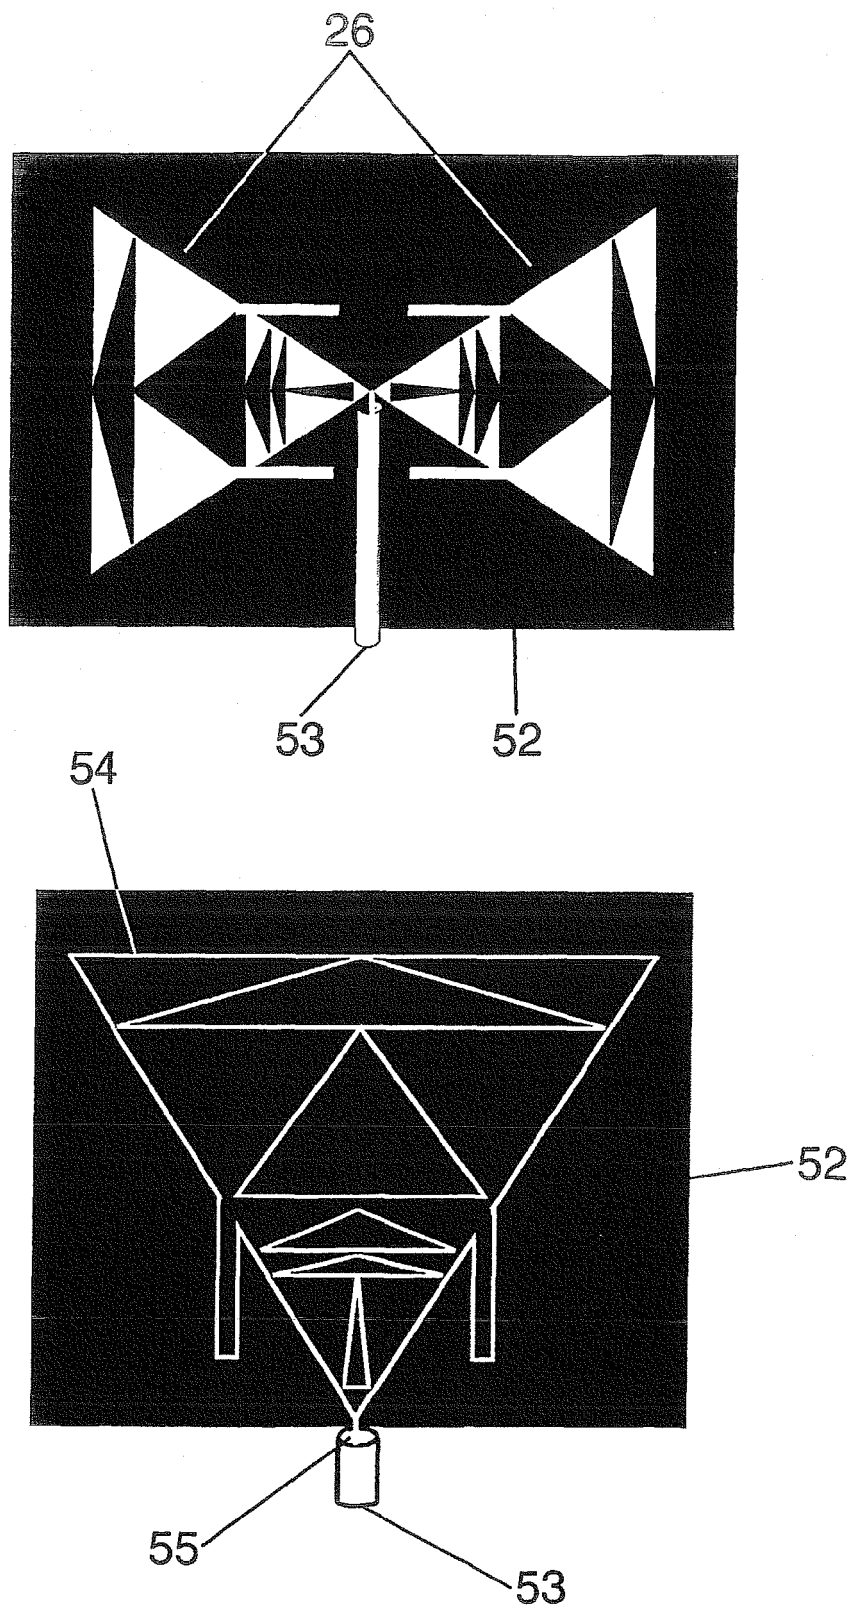


FIG. 14

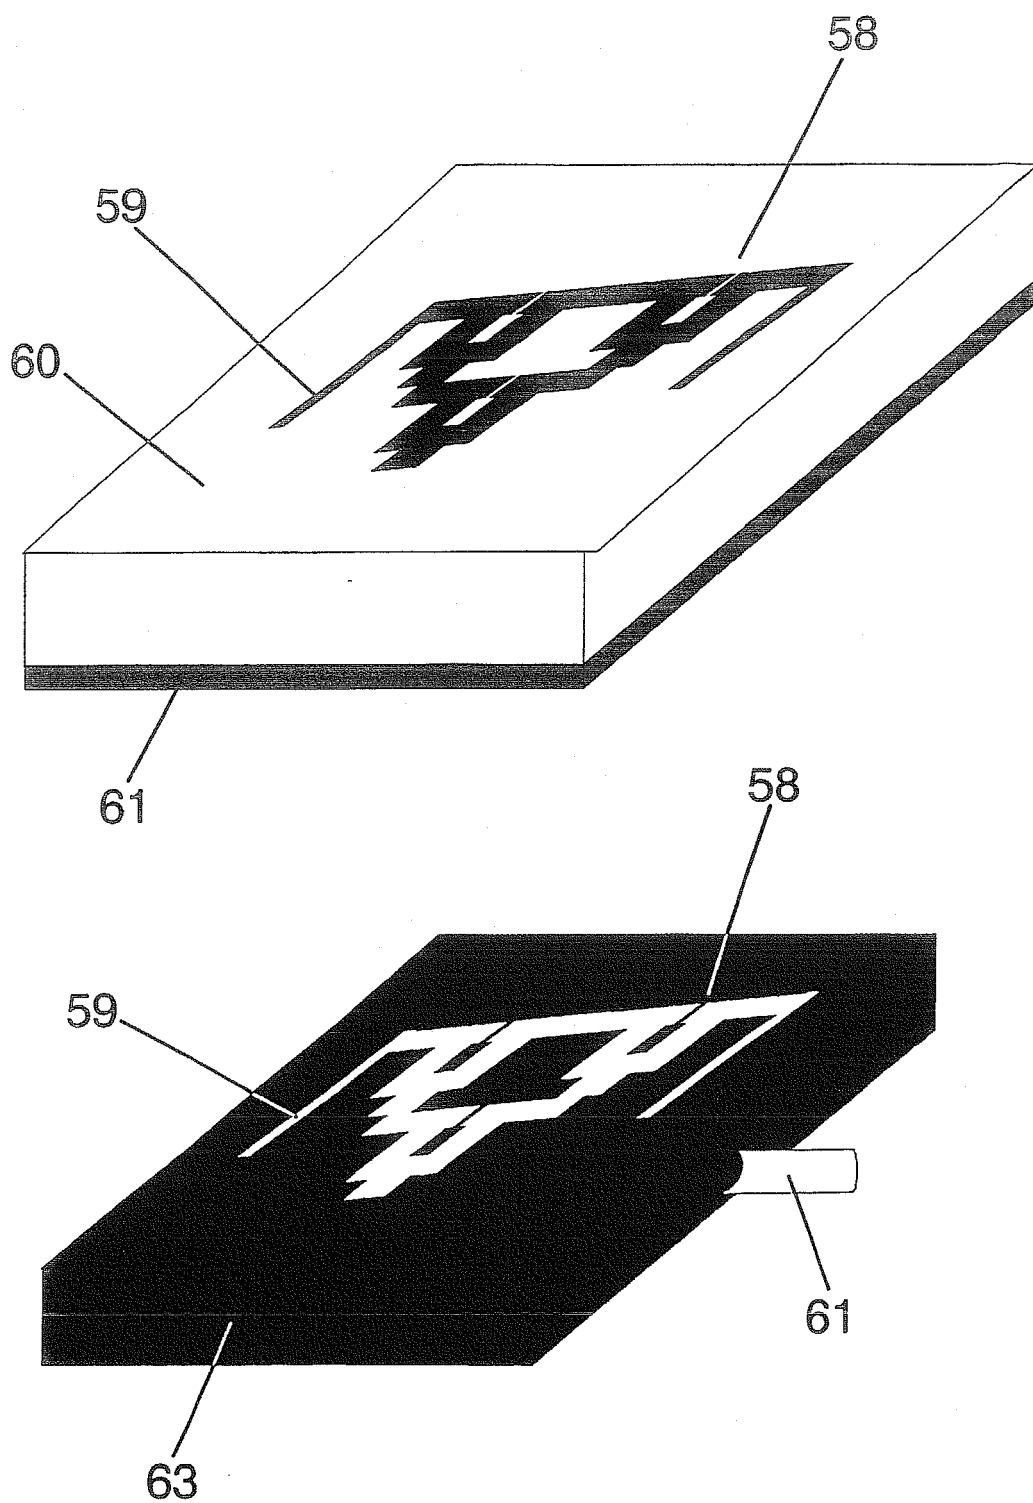


FIG.15

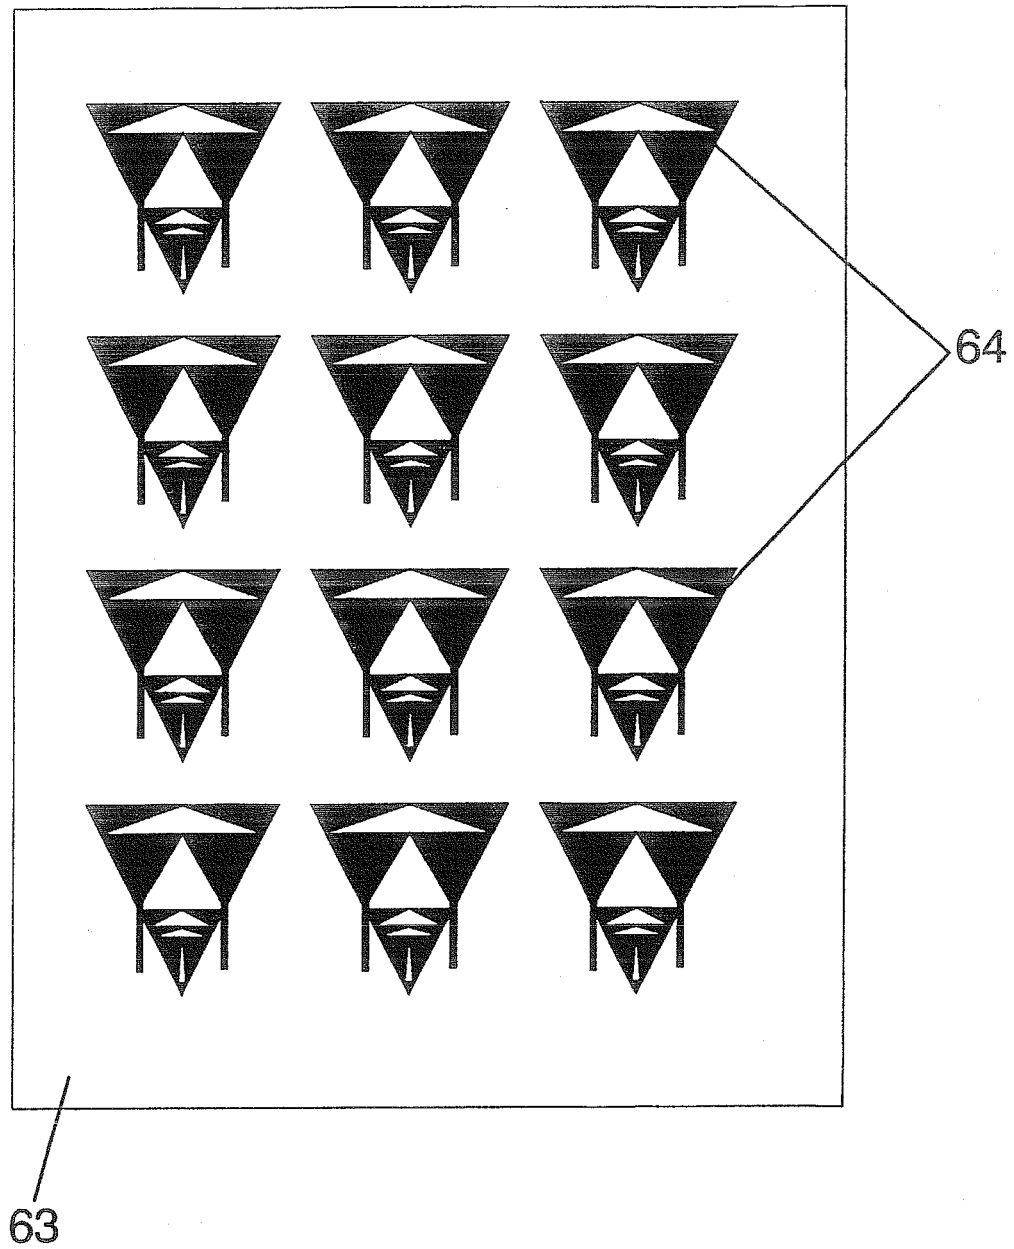


FIG.16



EUROPEAN SEARCH REPORT

Application Number
EP 10 18 0806

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X,D	WO 01/22528 A (SOLER CASTANY JORDI ; FRACTUS S A (ES); ANGUERA PROS JAUME (ES); B0) 29 March 2001 (2001-03-29) * the whole document *	1-7,9, 11,13-20	INV. H01Q1/24 H01Q1/36 H01Q1/38 H01Q5/00
X	WO 97/06578 A (FRACTAL ANTENNA SYSTEMS INC ; COHEN NATHAN (US)) 20 February 1997 (1997-02-20) * the whole document *	1,8-12, 16,18-20	
A,D	WO 01/54225 A (FRACTUS S A ; ANGUERA PROS JAIME (ES); PUENTE BALIARDA CARLES (ES);) 26 July 2001 (2001-07-26) * the whole document *	1-20	
A	SONG C T P ET AL: "Multi-circular loop monopole antenna" ELECTRONICS LETTERS, IEE STEVENAGE, GB, vol. 36, no. 5, 2 March 2000 (2000-03-02), pages 391-393, XP006014920 ISSN: 0013-5194 * figure 1 *	2	
			TECHNICAL FIELDS SEARCHED (IPC)
			H01Q
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 10 November 2010	Examiner Moumen, Abderrahim
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

2

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 10 18 0806

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

10-11-2010

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 0122528 A	29-03-2001	AT 292329 T	15-04-2005
		AU 5984099 A	24-04-2001
		BR 9917493 A	16-07-2002
		CN 1379921 A	13-11-2002
		CN 101188325 A	28-05-2008
		DE 29925006 U1	03-04-2008
		DE 69924535 D1	04-05-2005
		DE 69924535 T2	16-02-2006
		EP 1526604 A1	27-04-2005
		EP 2083475 A1	29-07-2009
		EP 1223637 A1	17-07-2002
		ES 2241378 T3	16-10-2005
		JP 4012733 B2	21-11-2007
		JP 2003510871 T	18-03-2003
		MX PA02003084 A	20-08-2003
		US 2005259009 A1	24-11-2005
		US 2002140615 A1	03-10-2002
		US 2006290573 A1	28-12-2006
		US 2009167625 A1	02-07-2009
		US 2007279289 A1	06-12-2007
		US 2007194992 A1	23-08-2007
		US 2008042909 A1	21-02-2008
		US 2005110688 A1	26-05-2005
WO 9706578 A	20-02-1997	AT 284080 T	15-12-2004
		DE 69633975 D1	05-01-2005
		DE 69633975 T2	01-12-2005
		EP 0843905 A1	27-05-1998
		ES 2236745 T3	16-07-2005
		US 6140975 A	31-10-2000
WO 0154225 A	26-07-2001	AT 302473 T	15-09-2005
		AU 3150000 A	31-07-2001
		BR 0017065 A	04-11-2003
		CN 1425208 A	18-06-2003
		DE 60022096 D1	22-09-2005
		DE 60022096 T2	01-06-2006
		EP 1258054 A1	20-11-2002
		EP 1592083 A2	02-11-2005
		ES 2246226 T3	16-02-2006
		JP 4070462 B2	02-04-2008
		JP 2003521146 T	08-07-2003
		MX PA02007113 A	27-03-2003
		US 2005195112 A1	08-09-2005
		US 2005231427 A1	20-10-2005
		US 2005264453 A1	01-12-2005

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 10 18 0806

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

10-11-2010

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 0154225	A	US 2009109101 A1	30-04-2009
		US 2009303134 A1	10-12-2009
		US 2007152886 A1	05-07-2007

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 09129176 B [0005]
- WO 0122528 A [0006] [0009] [0017]
- WO 0154225 A [0006]
- US 3967276 A [0008]
- US 5847682 A [0009]
- ES 0000411 W [0015]

Non-patent literature cited in the description

- **A.G.Kandoian.** Three new antenna types and their applications. *Proc. IRE*, February 1946, vol. 34, 70W-75W [0008]
- **W.Dou ; W.Y.M.Chia.** Small broadband stacked planar monopole. *Microwave and Optical Technology Letters*, November 2000, vol. 27, 288-289 [0009]