

(19)



(11)

**EP 1 380 069 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**06.06.2007 Bulletin 2007/23**

(51) Int Cl.:  
**H01Q 1/24** <sup>(2006.01)</sup> **H01Q 5/00** <sup>(2006.01)</sup>  
**H01Q 21/08** <sup>(2006.01)</sup> **H01Q 21/28** <sup>(2006.01)</sup>

(21) Application number: **01929562.5**

(86) International application number:  
**PCT/EP2001/004288**

(22) Date of filing: **16.04.2001**

(87) International publication number:  
**WO 2002/084790 (24.10.2002 Gazette 2002/43)**

**(54) DUAL-BAND DUAL-POLARIZED ANTENNA ARRAY**

DOPPELBANDIGE DUALPOLARISIERTE GRUPPENANTENNE

ANTENNE-RESEAU DOUBLE POLARISATION, DOUBLE BANDE

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**

(43) Date of publication of application:  
**14.01.2004 Bulletin 2004/03**

(73) Proprietor: **Fractus, S.A.**  
**08190 Sant Cugat Del Valles (ES)**

(72) Inventors:  
• **PUENTE BALIARDA, Carles**  
**E-08190 San Cuagat Del Valles (ES)**

• **ANGUERA PROS, Jaime**  
**E-12500 Vinaros (Castelló) (ES)**  
• **BORJA BORAU, Carmen**  
**E-08024 Barcelona (ES)**

(74) Representative: **Carpintero Lopez, Francisco**  
**Herrero & Asociados, S.L.**  
**Alcalá 35**  
**28014 Madrid (ES)**

(56) References cited:  
**WO-A-01/22528** **US-B1- 6 211 841**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 1 380 069 B1**

## Description

### OBJECT OF THE INVENTION

**[0001]** The present invention refers generally to a new family of antenna arrays that are able to operate simultaneously at two different frequency bands, while featuring dual-polarization at both bands. The design is suitable for applications where the two bands are centered at two frequencies  $f_1$  and  $f_2$  such that the ratio between the larger frequency ( $f_2$ ) to the smaller frequency ( $f_1$ ) is  $f_2/f_1 < 1.5$ . The dual-band dual-polarization feature is achieved mainly by means of the physical position of the antenna elements within the array. Also, some particular antenna elements are newly disclosed to enhance the antenna performance.

### BACKGROUND OF THE INVENTION

**[0002]** The development of dual-band dual-polarization arrays is of most interest in for instance cellular telecommunication services. Both second generation (2G) cellular services, such as the European GSM900, GSM1800 and the American AMPS and PCS1900, and third generation (3G) cellular services (such as UMTS) take advantage of polarization diversity in their network of base station (BTS) antennas to enhance the service performance while reducing as much as possible the size of the antenna installation. Keeping a minimum size for the antenna set-up in a BTS becomes a major issue when taking into account that the growth on the service demands forces operators in increasing the number of BTS, which is starting to produce a significant visual and environmental impact on urban and rural landscapes. The problem becomes particularly significant when the operator has to provide both 2G and 3G services, because since both kinds of services operate at different frequency bands the deployment of both networks using conventional single-band antennas implies doubling the number of installed antennas and increasing the environmental impact of the installation. Therefore, the invention of dual-band dual-polarization antennas, which are able to cope simultaneously with two services at two different bands, appears as a most interesting issue.

**[0003]** The development of multiband antennas and antenna arrays is one of the main engineering challenges in the antenna field. There is a well-known principle in the state of the art that states the behavior of an antenna or antenna array is fully dependent on its size and geometry relative to the operating wavelength. The size of an antenna is fully dependent on the wavelength, and in an antenna array, the spacing between elements is usually fixed and keeps a certain proportion with respect to the wavelength (typically between a half and a full wavelength). Due to this very simple principle, it is very difficult to make an array to operate simultaneously at two different frequencies or wavelengths, because it is difficult to make the antenna element geometry to match in size two

different wavelengths and similarly, it is difficult to find an spatial arranging of the antenna elements that meets the constraints of both wavelengths at the same time.

**[0004]** The first descriptions of the behavior of antenna arrays were developed by Shelkunoﬀ (S.A. Schellkunoﬀ, "A Mathematical Theory of Linear Arrays," Bell System Technical Journal, 22,80). That work was oriented to single-band antennas. Some first designs of frequency independent arrays (the log-periodic dipole arrays or LPDA) were developed in the 1960's (V.H.Rumsey, *Frequency-Independent Antennas*. New-York Academic, 1966; R.L. Carrel, "Analysis and design of the log-periodic dipole array," Tech.Rep. 52, Univ.Illinois Antenna Lab., Contract AF33(616)-6079, Oct 1961; P.E. Mayes, "Frequency Independent Antennas and Broad-Band Derivatives Thereof", Proc. IEEE, vol.80, no.1, Jan. 1992). Said LPDA arrays were based on a non-uniform spacing of dipole elements of different sizes and were designed to cover a wide range of frequencies, however due their moderate gain (10 dBi) these designs have a restricted range of application and would not be suitable for applications such as for instance cellular services, where a higher gain (above 16 dBi) is required. Also, neither the horizontal beamwidth (too narrow for BTS) nor the polarization and mechanical structure of said LPDA antennas match the requirements for BTS.

**[0005]** Recently some examples of multiband antenna arrays have been described in the state of the art. For instance patent PCT/ES99/00343 describes an interleaved antenna element configuration for general-purpose multiband arrays. A co-linear set-up of antenna elements is described there, where the use of multi-band antenna elements is required at those positions where antenna elements from different bands overlap. The general scope of that patent does not match the requirements of some particular applications. For instance it is difficult to achieve a dual-band behavior following the description of PCT/ES99/00343 when the frequency ratio between bands is below 1.5, as it is intended for the designs disclosed in the present invention. Also, that solution is not necessarily cost-effective when an independent electrical down-tilt is required for each band. The present invention discloses a completely different solution based on dual-polarization, single-band antenna elements, which are spatially arranged to minimize the antenna size.

**[0006]** There are already existing examples of dual-band dual-polarization antennas in the market which handle simultaneously 2G and 3G services, however these are the so called "side-by-side" solutions which simply integrate two separate antennas into a single ground-plane and radome (Fig.1). The inconvenient of these antenna configurations are the size of the whole package (with up to 30 cm wide they are typically twice as much the size of a single antenna) and the pattern distortion due to the coupling between antennas. Some examples of this solutions can be found for instance in <http://www.racal-antennas.com/> and in <http://www.rym->

sa.com/. The present invention discloses a more compact solution which is achieved by means of a careful selection of the antenna element positions and the shape of said antenna elements which minimizes the coupling between them.

**[0007]** For the particular case where the spacing between  $f_1$  and  $f_2$  is very small, several broadband solutions are described in the prior art to operate simultaneously at both bands. However, such solutions are not suitable if an independent and different down-tilt is required for each band, which is something that can be easily solved according to the present invention.

## SUMMARY OF THE INVENTION

**[0008]** The antenna architecture consists on an interleaving of two independent vertically linear single-band arrays such that the relative position of the elements minimizes the coupling between antennas. Said spatial arranging of the antenna elements contributes to keeping the antenna size reduced to a minimum extent. In an scheme of the basic layout for the spatial arranging (interleaving) of the antenna, solid dots display the positions of the elements for the lower frequency  $f_1$ , while the squares display the positions for the antenna elements for the upper frequency  $f_2$ . Antenna elements for the higher frequency band  $f_2$  are aligned along a vertical axis with the desired spacing between elements. Said spacing is slightly smaller than a full-wavelength (typically below 98% the size of the shorter wavelength) for a maximum gain, although it can be readily seen that the spacing can be made shorter depending on the application.

**[0009]** A second vertical column of elements for the lower frequency band  $f_1$  is aligned along a second vertical axis placed next to said first axis and substantially parallel to it. In another particular arrangement of the invention, low-frequency elements are placed along a left axis while high-frequency elements are placed along a right axis, but obviously the position of both axes could be exchanged such that low-frequency elements would be placed on the right side and vice versa. In any case, the spacing between said axis is chosen to fall between 0.1 and 1.2 times the longer wavelength.

**[0010]** The shorter wavelength (corresponding to  $f_2$ ) determines the spacing between elements (11) at both axis. Usually a spacing below a 98% of said shorter wavelength is preferred to maximize gain while preventing the introduction of grating lobes in the upper band; this is possible due to the spacing between frequency bands which is always  $f_2/f_1 < 1.5$  according to the present invention.

**[0011]** Regarding the relative position of elements, elements for  $f_2$  are placed at certain positions along a vertical axis and horizontal axes such that the horizontal axes intersect both with the positions of said elements and the mid-point between elements at the neighbor axis; this ensures a maximum distance between elements and therefore a minimum coupling between elements of dif-

ferent bands.

**[0012]** Having independent elements for each band, the array is easily fed by means of two-separate distribution networks. Corporate feed or taper networks in microstrip, strip-line, coaxial or any other conventional microwave network architecture described in the prior art can be used and do not constitute an characterizing part of the invention. It is interesting however to point out that by using independent networks an independent phasing of the elements at each band can be used within the present invention, which is in turn useful for introducing either a fix or adjustable electrical down-tilt of the radiation pattern at each band independently. Optionally and depending on the particular set of frequencies of  $f_1$  and  $f_2$ , it is clear to those skilled in the art that any other dual-band or broad-band feeding network described in the prior art can be also used within the spirit of the present invention.

**[0013]** Regarding the antenna elements, any dual-polarized antenna elements (for instance crossed dipole elements, patch elements) can be used according to the scope of the present invention, however a radiating element of reduced size is preferred to reduce the coupling between them

**[0014]** The same basic configuration of dual-band array described here features different beam widths and shapes in the horizontal plane depending on the spacing between elements in the horizontal direction. For this purpose, several elements within the array can be placed at a shifted horizontal position with respect to either left or right axis according to the present invention. Typically, the shift with respect to said axis is smaller than 70% of the longer operating wavelength. A particular case of such a displacement consists on tilting a few degrees (always below  $45^\circ$ ) one or both of said reference axis such that the displacement is uniformly increased either upwards or downwards.

## BRIEF DESCRIPTION OF THE DRAWINGS

**[0015]**

Fig.1.- shows a conventional side-by-side solution (7) for a dual-band 2G + 3G array (prior-art). Two conventional single band arrays (5) and (6) for each band are merged within a single ground-plane (8) and housed into a single radome. The horizontal width (9) of the resulting antenna system is inconvenient for aesthetical and environmental reasons. Notice that the spacing between elements at each particular bands (between dots and squares) is different for this prior art configuration.

Fig.2.- shows a general spatial arranging of the antenna elements for the dual-band dual-polarization array. The solid dots (1) display the positions of the elements for the lower frequency  $f_1$ , while the squares (2) display the positions for the antenna el-

elements for the upper frequency  $f_2$ . Elements are aligned along parallel axes (3) and (4). The spacing (11) between elements in the vertical position is the same at both bands. Notice that the horizontal axes (10) that define together with axis (3) the position (2) of the elements at frequency  $f_2$ , are intersecting axis (4) at the mid-point between positions (1) for elements at frequency  $f_1$ . The interleaved position in the vertical axis ensures minimum coupling between bands while keeping the width (9) of the ground-plane (8) and antenna package to the minimum extent

Fig. 3.- shows two particular examples (13) and (14) of dual-polarization space-filling miniature patch antennas that can be used to minimize the inter-band and intra-band coupling within the elements of the array. The white circles (15) with the inner central dot indicate the feed positions for dual orthogonal polarization.

Fig. 4.- shows an example where some elements (15) are shifted horizontally with respect to the vertical axis.

Fig. 5.- shows an example where one of the axis (3) is slightly tilted from the vertical position defining another axis (3') the elements (2) corresponding to  $f_2$  are aligned along. This can be seen as a particular case of the general one described in Fig. 4 where all the elements are sequentially displaced a fixed distance with respect to the upper neighbor.

Fig. 6.- shows a preferred embodiment of a dual-polarization dual-band array for simultaneous operation at GSM1800 (1710-1880 MHz) and UMTS (1900 MHz-2170 MHz). The antenna elements are dual-polarization patches with a space-filling perimeter as those described in Fig. 3.

#### DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT OF THE INVENTION

[0016] An scheme of the basic layout for the spatial arranging (interleaving) of the antenna elements is shown in Fig. 2. The solid dots (1) display the positions of the elements for the lower frequency  $f_1$ , while the squares (2) display the positions for the antenna elements for the upper frequency  $f_2$ . Antenna elements for the higher frequency band  $f_2$  are aligned along a vertical axis (3) with the desired spacing between elements (11). Said spacing is slightly smaller than a full-wavelength (typically below 98% the size of the shorter wavelength) for a maximum gain, although it can be readily seen that the spacing can be made shorter depending on the application. A second vertical column of elements for the lower frequency band  $f_1$  is aligned along a second vertical axis (4) placed next to said first axis (3) and substantially

parallel to it. In the particular arrangement of Fig. 2 low-frequency elements are placed along the left axis (4) while high-frequency elements are placed along the right axis (3), but obviously the position of both axes could be exchanged such that low-frequency elements would be placed on the right side and vice versa. In any case, the spacing (9) between said axis (3) and (4) is chosen to fall between 0.1 and 1.2 times the longer wavelength.

[0017] The shorter wavelength (corresponding to  $f_2$ ) determines the spacing between elements (11) at both axes. Usually a spacing below a 98% of said shorter wavelength is preferred to maximize gain while preventing the introduction of grating lobes in the upper band; this is possible due to the spacing between frequency bands which is always  $f_2/f_1 < 1.5$  according to the present invention. Regarding the relative position of elements (1) and (2), elements for  $f_2$  are placed at positions (2) along vertical axis (3) and horizontal axes (10) such that the horizontal axes (10) intersect both with the positions of said elements (2) and the mid-point (12) between elements (1) at the neighbor axis (4); this ensures a maximum distance between elements and therefore a minimum coupling between elements of different bands.

[0018] Having independent elements for each band, the array is easily fed by means of two-separate distribution networks. Corporate feed or taper networks in microstrip, strip-line, coaxial or any other conventional microwave network architecture described in the prior art can be used and do not constitute an characterizing part of the invention. It is interesting however to point out that by using independent networks an independent phasing of the elements at each band can be used within the present invention, which is in turn useful for introducing either a fix or adjustable electrical down-tilt of the radiation pattern at each band independently.

[0019] Optionally and depending on the particular set of frequencies of  $f_1$  and  $f_2$ , it is clear to those skilled in the art that any other dual-band or broad-band feeding network described in the prior art can be also used within the spirit of the present invention.

[0020] Regarding the antenna elements, any dual-polarized antenna elements (for instance crossed dipole elements, patch elements) can be used according to the scope of the present invention, however a radiating element of reduced size is preferred to reduce the coupling between them. A small dual-polarized patch element with a space-filling perimeter is proposed here as a particular example for a possible array implementation (Fig. 3). For the same purpose, other dual-polarized space-filling miniature antenna elements, such as for instance those described in patent PCT/EP00/00411, can be used as well.

[0021] The same basic configuration of dual-band array described here features different beam widths and shapes in the horizontal plane depending on the spacing between elements in the horizontal direction. For this purpose, several elements within the array can be placed at a shifted horizontal position with respect to either axis (3) or (4) according to the present invention. Typically, the

shift with respect to said axis (3) or (4) is smaller than 70% of the longer operating wavelength. A particular case of such a displacement consists on tilting a few degrees (always below 45°) one or both of said reference axis such that the displacement is uniformly increased either upwards or downwards. Fig.4 shows as an example a particular embodiment where the some elements are displaced from the axis, while Fig.5 shows another embodiment where the axis (3) and (4) are slightly tilted. As it would be obvious to those skilled in the art, other shifting and tilting schemes can be used for the same purpose within the scope of the present invention.

**[0022]** As it can be readily seen by anyone skilled in the art, the number of elements and the vertical extent of the array is not a substantial part of the invention; any number of elements can be chosen depending on the desired gain and directivity of the array. Also, the number of elements and vertical extent of the array does not need to be the same; any combination in the number of elements or vertical extent for each band can be optionally chosen within the spirit of the present invention.

**[0023]** Beyond the specific coordinate position of the elements, the skilled person will notice that any rotation of the elements to for instance obtain other kind of polarizations states or changes in the antenna parameters as described in the prior art can be also applied to the present invention.

**[0024]** A preferred embodiment of the present invention is an array that operates simultaneously at the GSM1800 (1710-1880MHz) and UMTS (1900-2170 MHz) frequency bands. The antenna features  $\pm 45^\circ$  dual-polarization at both bands and finds major application in cellular base stations (BTS) where both services are to be combined into a single site. The basic configuration of a particular embodiment for such a configuration is shown in Fig.6.

**[0025]** The antenna is designed with 8 elements operating at GSM1800 (13) and 8 elements operating at UMTS (14) to provide a directivity above 17 dBi. The elements are aligned along two different axes (3) and (4), one for each band. According to the present invention, elements (13) for GSM1800 are interleaved in the vertical direction with respect to elements for UMTS (14) to reduce the coupling between elements by maximizing the distance between them, yet keeping a minimum distance between said axes (3) and (4). For this particular embodiment, the spacing between axes (3) and (4) must be larger than 40 mm if an isolation between input ports above 30 dB (as usual for cellular systems) is desired.

**[0026]** Depending on the required gain, it is clear to anyone skilled in the art that the number of elements can be enlarged or reduced beyond 8. The number of elements can be even different for each band to achieve different gains. To operate at this particular bands, the vertical spacing between elements must be chosen to fall within the range of 100 mm to 165 mm. For an 8-element array and a gain around 17 dBi the elements are mounted upon a substantially rectangular ground-plane

(8) with an overall height within a range of 1100 mm up to 1500mm.

**[0027]** Any kind dual-polarized single-band radiating elements can be used for this antenna array within the scope of the present invention, such as for instance crossed dipoles or circular, squared or octagonal patches, however innovative space-filling patches such as those in drawings (13) and (14) are preferred here because they feature a smaller size (height, width, area) compared to other prior art geometries. Said space-filling patches can be manufactured using any kind of the well-known conventional techniques for microstrip patch antennas and for instance can be printed over a dielectric substrate such as epoxy glass-fiber (FR4) substrates or other specialized microwave substrates such as Cu-Clad®, Arlon® or Rogers® to name a few. Said elements are mounted parallel to a conducting ground-plane (8) and typically supported with a dielectric spacer. It is precisely the combination of the particular spatial arrangement of the elements (vertical interleaving and proximity of vertical axis) together with the reduced size and the space-filling shape of the patch antenna elements that the whole antenna size is reduced. The size of the antenna is basically the size of the ground-plane (8) which for this particular embodiment must be wider than 140 mm but it can be typically stretched below 200 mm, which is a major advantage for a minimum visual environmental impact on landscapes compared to other conventional solutions such as the one described in Fig.1

**[0028]** The elements can be fed at the two orthogonal polarization feeding points located at the center of the circles (15) by means of several of the prior-art techniques for patch antennas, such as for instance a coaxial probe, a microstrip line under the patch or a slot on the ground-plane (8) coupled with a distribution network beyond said ground-plane. For a dual-band dual-polarization operation four independent feeding and distribution networks (one for each band and polarization) can be used. According to the preferred embodiment, said feeding networks are mounted on the back-side of the ground-plane and any of the well-known configurations for array networks such as for instance microstrip, coaxial or stripline networks can be used since does not constitute an essential part of the invention.

**[0029]** Regarding the relative position of the feeding points (15) upon the patch, Fig.6 shows an embodiment where said feeding points are located at the inner side towards the center of the ground-plane, that is, at the right side of axis (4) for the lower band and at the left side of axis (3). Those skilled in the art will notice that any other embodiments can be used as well within the scope of the present invention, such as for instance: all elements with feeding points at the left part of their respective axes, all feeding points on the right side, some elements on the right side and some on the left side, or even some elements with a feeding point at each side of the corresponding axis is possible within the scope of the present invention.

**[0030]** In the preferred embodiment, the overall antenna array with the elements, ground-plane and feeding network is mounted upon a conventional shielding metallic housing enclosing the back part of the ground-plane, said housing also acting for a support of the whole antenna. Also, a conventional dielectric radome covering the radiating elements and protecting the whole antenna from weather conditions is also mounted and fixed to the housing as in any conventional base-station antenna.

**[0031]** The antenna would naturally include 4 connectors (typically 7/16 connectors), one for each band and polarization, mounted at the bottom part of the ground-plane. Each connector is then been connected through a transmission line (such as for instance a coaxial cable) to the input port of each feeding network.

**[0032]** The skilled in the art will notice that other connector combinations are possible within the scope of the present invention. For instance, a filter duplexer can be used to combine the input ports of the +45° GSM1800 and UMTS networks into a single connector, and the -45° GSM1800 and UMTS networks into another single connector to yield a total of only two connectors. Said duplexer can be any duplexer with a 30 dB isolation between ports and does not constitute an essential part of the present invention. Obviously, an alternative solution such as a broadband or dual-band network combining GSM1800 and UMTS for the +45° and another one for the -45° polarization could be used instead of the diplexer, which yields to a two-connector configuration as well.

## Claims

1. Dual-band dual-polarized antenna array operating at a lower frequency  $f_1$  and at a higher frequency  $f_2$ , the ratio  $f_2/f_1$  being smaller than 1.5, **characterized by** the physical arrangement of the antenna elements, said arrangement comprising:

(a) a first row of antenna elements aligned along a first vertical axis, said elements being dual-polarized antenna elements operating at said higher frequency  $f_2$ , the spacing between said elements being smaller than the size of the central wavelength at said higher frequency  $f_2$

(b) a second row of antenna elements aligned along a second vertical axis, said elements being dual-polarized antenna elements operating at said lower frequency  $f_1$ , said elements being spaced the same distance as the elements in the adjacent row operating at frequency  $f_2$ , said second vertical axis being placed substantially parallel to said first vertical axis at a distance between 0.1 and 1.2 times the longer operating wavelength,

and wherein the positions of the elements operating at  $f_2$  are interleaved in the vertical direction with re-

spect to the vertical positions of the elements operating at  $f_1$  in such a way that the distance among elements is maximized to minimize the inter-band and intra-band electromagnetic coupling among radiating elements.

2. Dual-band dual-polarized antenna array according to claim 1 wherein at least one element operating at any of the two frequencies  $f_1$  and  $f_2$  is shifted horizontally from its corresponding vertical axis at a distance smaller than 70% of the longer operating wavelength.
3. Dual-band dual-polarized antenna array according to claim 1 or 2 wherein at least one of said two axes is tilted an angle smaller than 45° with respect to the vertical direction.
4. Dual-band dual-polarized antenna array according to claim 1, 2 or 3 wherein the size of the resonant antenna elements is smaller than a half of the free-space operating wavelength to minimize the electromagnetic coupling between them.
5. Dual-band dual-polarized antenna array according to claim 1, 2, 3 or 4 wherein the antenna elements are within the class of space-filling antennas.
6. Dual-band dual-polarized antenna array according to claim 1, 2, 3, 4 or 5 wherein the antenna elements comprise at least a micro-strip patch element with an space-filling perimeter.
7. Dual-band dual-polarized antenna array according to claim 1, 2, 3, 4, 5 or 6 wherein the operating frequencies  $f_1$  and  $f_2$  are chosen two fall within the GSM1800 (1710-1880 MHz) and UMTS frequency bands (1900-2170 MHz), wherein the spacing between elements at each of said vertical axis is chosen between 100 mm and 165 mm, wherein the spacing between said two vertical axis is at least 40 mm and wherein the antenna elements are mounted upon a substantially rectangular conducting ground-plane, said ground-plane being at least 140 mm wide in the horizontal direction.
8. Dual-band dual-polarized antenna array according to claim 1, 2, 3, 4, 5 or 6 wherein the operating frequencies  $f_1$  and  $f_2$  are chosen to be any combination within the set of the bands: GSM1800 or DCS (1710-1880MHz); UMTS (1900-2170 MHz), PCS1900 (1850-1990 MHz) and DECT (1880-1900).
9. Dual-band dual-polarized antenna for operation within the GSM1800 and UMTS bands according to claim 7, wherein the antenna features a different electrical down-tilt at each of the two bands and

wherein the antenna is used in a base-station of a cellular system network to provide coverage in said two bands.

10. Dual-band dual-polarized antenna array according to claim 1, 2, 3, 4, 5 or 6 wherein the operating frequencies  $f_1$  and  $f_2$  are chosen to be any combination within the set of the bands: GSM900 (890-960 MHz); US Cellular/Qualcomm-CDMA (824-894 MHz); TACS/ETACS (870-960); ID54 (824-894 MHz); CT2 (864-868 MHz).
11. Dual-band dual-polarized antenna array according to any of the preceding claims wherein the spacing between elements at first frequency  $f_1$  can differ from the spacing between elements at second frequency  $f_2$  up to a 20%.

#### Patentansprüche

1. Dual polarisiertes bei einer niedrigeren Frequenz  $f_1$  und einer höheren Frequenz  $f_2$  betriebenes Dualband Antennen-Array, wobei der Quotient von  $f_2/f_1$  unter 1,5 liegt, **gekennzeichnet durch** die physische Anordnung der Antennenelemente, wobei die besagte Anordnung Folgendes umfasst:

a) eine erste Reihe von Antennenelementen, die entlang einer ersten vertikalen Achse angeordnet sind, wobei es sich bei den Elementen um dual polarisierte bei der höheren Frequenz  $f_2$  betriebene Antennenelemente handelt, wobei der Abstand zwischen den Elementen kleiner als die Größe der zentralen Wellenlänge bei der höheren Frequenz  $f_2$  ist,

b) eine zweite Reihe von Antennenelementen, die entlang einer zweiten vertikale Achse angeordnet sind, wobei es sich bei den Elementen um dual polarisierte bei der niedrigeren Frequenz  $f_1$  betriebene Antennenelemente handelt, wobei die Elemente mit demselben Abstand wie die bei der Frequenz  $f_2$  arbeitenden Elemente der angrenzenden Reihe angeordnet sind, wobei die zweite vertikale Achse im Wesentlichen parallel zur ersten vertikalen Achse mit einem zwischen dem 0,1- und 1,2-fachen der längeren Betriebswellenlänge liegendem Abstand angeordnet ist,

und bei dem die Positionen der bei  $f_2$  betriebenen Elemente in vertikaler Richtung mit den vertikalen Positionen der bei  $f_1$  betriebenen Elementen derart verschachtelt sind, dass der Abstand zwischen den Elementen maximiert wird, um die elektromagnetische Interband- und Intraband-Kopplung zwischen ausstrahlenden Elementen zu minimieren.

2. Dual polarisiertes Dualband Antennen-Array nach Anspruch 1, bei dem wenigstens eines der bei den beiden Frequenzen  $f_1$  und  $f_2$  betriebenen Elemente horizontal von der entsprechenden vertikalen Achse mit einem Abstand von weniger als 70% der längeren Betriebswellenlänge verschoben ist.

3. Dual polarisiertes Dualband Antennen-Array nach Anspruch 1 oder 2, bei dem wenigstens eine der beiden Achsen mit einem Winkel kleiner als  $45^\circ$  gegenüber der vertikalen Richtung geneigt ist.

4. Dual polarisiertes Dualband Antennen-Array nach Anspruch 1, 2 oder 3, bei dem die Größe der resonanten Antennenelemente kleiner als die Hälfte der Freiraum-Betriebswellenlänge ist, um eine elektromagnetische Kopplung zwischen denselben zu minimieren.

5. Dual polarisiertes Dualband Antennen-Array nach Anspruch 1, 2, 3 oder 4, bei dem die Antennenelemente innerhalb der Klasse der raumfüllenden Antennen liegen.

6. Dual polarisiertes Dualband Antennen-Array nach Anspruch 1, 2, 3, 4, oder 5, bei dem die Antennenelemente wenigstens ein Mikrostreifen-Patchelement mit einem raumfüllenden Umfang einschließen.

7. Dual polarisiertes Dualband Antennen-Array nach Anspruch 1, 2, 3, 4, 5 oder 6, bei dem die Betriebsfrequenzen  $f_1$  und  $f_2$  so ausgewählt sind, dass diese innerhalb des GSM1800 (1710-1880 MHz) und UMTS Frequenzbandes (1900-2170 MHz) fallen, bei dem der Abstand zwischen den Elementen bei jeder der vertikalen Achsen zwischen 100 mm und 165 mm gewählt ist, bei dem der Abstand zwischen den beiden vertikalen Achsen wenigstens 40 mm beträgt, und bei dem die Antennenelemente auf einer im Wesentlichen rechteckigen leitenden Grundplatte montiert sind, wobei die besagte Grundplatte in horizontaler Richtung wenigstens 140 mm breit ist.

8. Dual polarisiertes Dualband Antennen-Array nach Anspruch 1, 2, 3, 4, 5 oder 6, bei dem die Betriebsfrequenzen  $f_1$  und  $f_2$  so ausgewählt werden, dass diese irgendeiner Kombination innerhalb der Gruppe von Bändern entsprechen: GSM1800 oder DCS (1710-1880 MHz); UMTS (1900-2170 MHz), PCS1900 (1850-1990 MHz) und DECT (1880-1900).

9. Dual polarisierte Dualband Antenne zum Betrieb innerhalb der GSM1800 und UMTS Bänder nach Anspruch 7, bei der die Antenne bei jedem der beiden Bänder einen unterschiedlichen elektrischen Neigungswinkel aufweist, und bei der die Antenne in

einer Basisstation eines Mobilfunknetzwerks verwendet wird, um eine Netzdeckung in den beiden Bändern zu bieten.

10. Dual polarisiertes Dualband Antennen-Array nach Anspruch 1, 2, 3, 4, 5 oder 6, bei dem die Betriebsfrequenzen f1 und f2 so ausgewählt werden, dass diese irgendeiner Kombination innerhalb der Gruppe von Bändern entsprechen: GSM900 (890-960 MHz); US Cellular/Qualcomm-CDMA (824-894 MHz); TACS/ETACS (870-960); ID54 (824-894 MHz); CT2 (864-868 MHz).
11. Dual polarisiertes Dualband Antennen-Array nach einem der vorherigen Ansprüche, bei dem der Abstand zwischen den Elementen bei der ersten Frequenz f1 sich von dem Abstand zwischen den Elementen bei der zweiten Frequenz f2 um bis zu 20% unterscheiden kann.

## Revendications

1. Antenne-réseau double polarisation, double bande, fonctionnant à une fréquence inférieure f1 et à une fréquence plus élevée f2, le rapport f2/f1 étant plus petit que 1,5, **caractérisée par** l'agencement physique des éléments d'antenne, ledit agencement comprenant:
  - (a) une première rangée d'éléments d'antenne alignés le long d'un premier axe vertical, lesdits éléments étant des éléments d'antenne à polarisation double, fonctionnant à ladite fréquence plus élevée f2, l'espacement entre lesdits éléments étant plus petit que la grandeur de la longueur d'onde centrale à ladite fréquence plus élevée f2
  - (b) une seconde rangée d'éléments d'antenne alignés le long d'un second axe vertical, lesdits éléments étant des éléments d'antenne à polarisation double fonctionnant à ladite fréquence plus basse f1, lesdits éléments étant espacés selon la même distance que les éléments dans la rangée adjacente fonctionnant à la fréquence f2, ledit second axe vertical étant placé sensiblement parallèlement audit premier axe vertical à une distance entre 0,1 et 1,2 fois de la longueur d'onde fonctionnelle plus longue,

et où les positions des éléments fonctionnant à f2 s'entrelacent dans la direction verticale par rapport aux positions verticales des éléments fonctionnant à f1 de telle manière que la distance entre les éléments est amenée à un maximum pour réduire à un minimum le couplage électromagnétique inter-bande et intra-bande parmi les éléments de rayonnement.
2. Antenne-réseau double polarisation, double bande selon la revendication 1, où au moins un élément fonctionnant à l'une quelconque des deux fréquences f1 et f2 est déplacé horizontalement de son axe vertical correspondant selon une distance plus petite que 70% de la longueur d'onde fonctionnelle plus longue.
3. Antenne-réseau double polarisation, double bande selon la revendication 1 ou 2, où au moins l'un desdits deux axes est basculé selon un angle plus petit que 45° par rapport à la direction verticale.
4. Antenne-réseau double polarisation, double bande selon la revendication 1, 2 ou 3, où la taille des éléments d'antenne résonnants est plus petite qu'une moitié de la longueur d'onde fonctionnelle de l'espace libre pour réduire à un minimum le couplage électromagnétique entre eux.
5. Antenne-réseau double polarisation, double bande selon la revendication 1, 2, 3 ou 4, où les éléments d'antenne sont dans la classe d'antennes de remplissage d'espace.
6. Antenne-réseau double polarisation, double bande selon la revendication 1,2,3,4 ou 5, où les éléments d'antenne comprennent au moins un élément de connexion à micro-bande avec un périmètre de remplissage d'espace.
7. Antenne-réseau double polarisation, double bande selon la revendication 1,2,3,4,5 ou 6, où les fréquences de fonctionnement f1 et f2 sont sélectionnées pour tomber dans les bandes de fréquence GSM1800 (1710-1880 MHz) et UMTS (1900-2170 MHz), où l'espacement entre les éléments à chacun desdits axes verticaux est sélectionné entre 100 mm et 165 mm, où l'espacement entre lesdits deux axes verticaux est au moins de 40 mm, et où les éléments d'antenne sont montés sur un plan de masse conducteur sensiblement rectangulaire, ledit plan de masse ayant une largeur d'au moins 140 mm dans la direction horizontale.
8. Antenne-réseau double polarisation, double bande selon la revendication 1,2,3,4,5 ou 6, où les fréquences de fonctionnement f1 et f2 sont sélectionnées pour être n'importe quelle combinaison dans l'ensemble des bandes: GSM1800 ou DCS (1710-1880 MHz); UMTS (1900-2170 MHz), PCS1900 (1850-1990 MHz) et DECT (1880-1900).
9. Antenne-réseau double polarisation, double bande pour le fonctionnement dans les bandes GSM1800 et UMTS selon la revendication 7, où l'antenne réalise un basculement électrique vers le bas à chacune des deux bandes, et où l'antenne est utilisée dans



une station de base d'un réseau de systèmes cellulaires pour réaliser une couverture dans les deux bandes précitées.

10. Antenne-réseau double polarisation, double bande selon la revendication 1,2,3,4,5 ou 6, où les fréquences de fonctionnement f1 et f2 sont sélectionnées pour être n'importe quelle combinaison dans l'ensemble des bandes: GSM900 (890-960 MHz); US Cellular/Qualcomm-CDMA (824-894 MHz); TACS/ETACS(870-960); ID54 (824-894 MHz); CT2 (864-868 MHz). 5 10
11. Antenne-réseau double polarisation, double bande selon l'une des revendications précédentes, où l'espacement entre les éléments à la première fréquence f1 peut différer de l'espacement entre les éléments à la seconde fréquence f2 jusqu'à 20%. 15

20

25

30

35

40

45

50

55

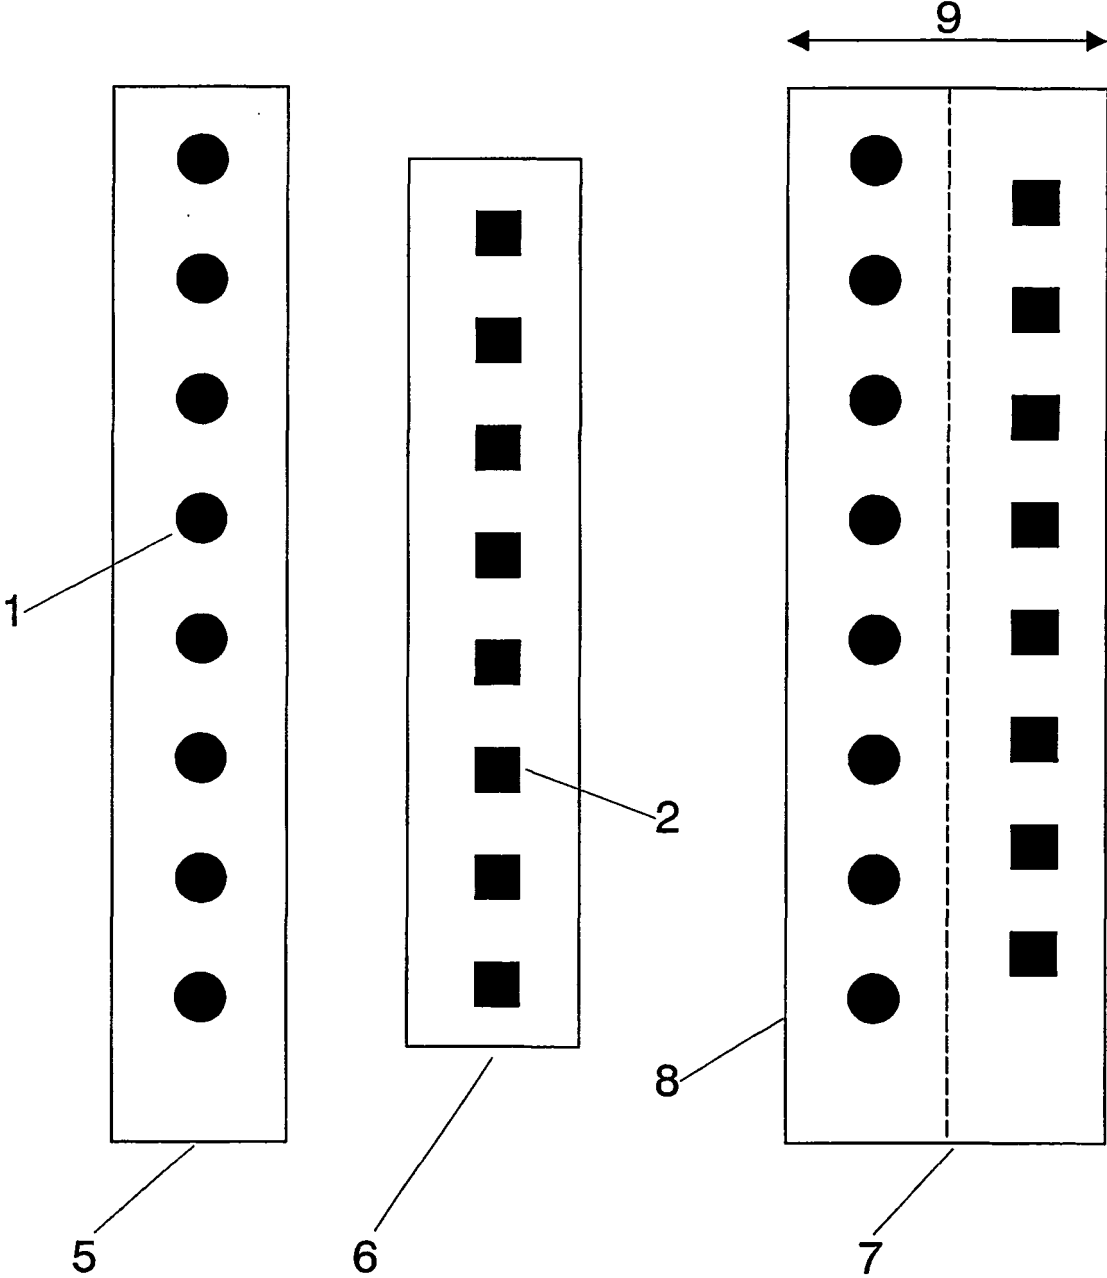


FIG. 1

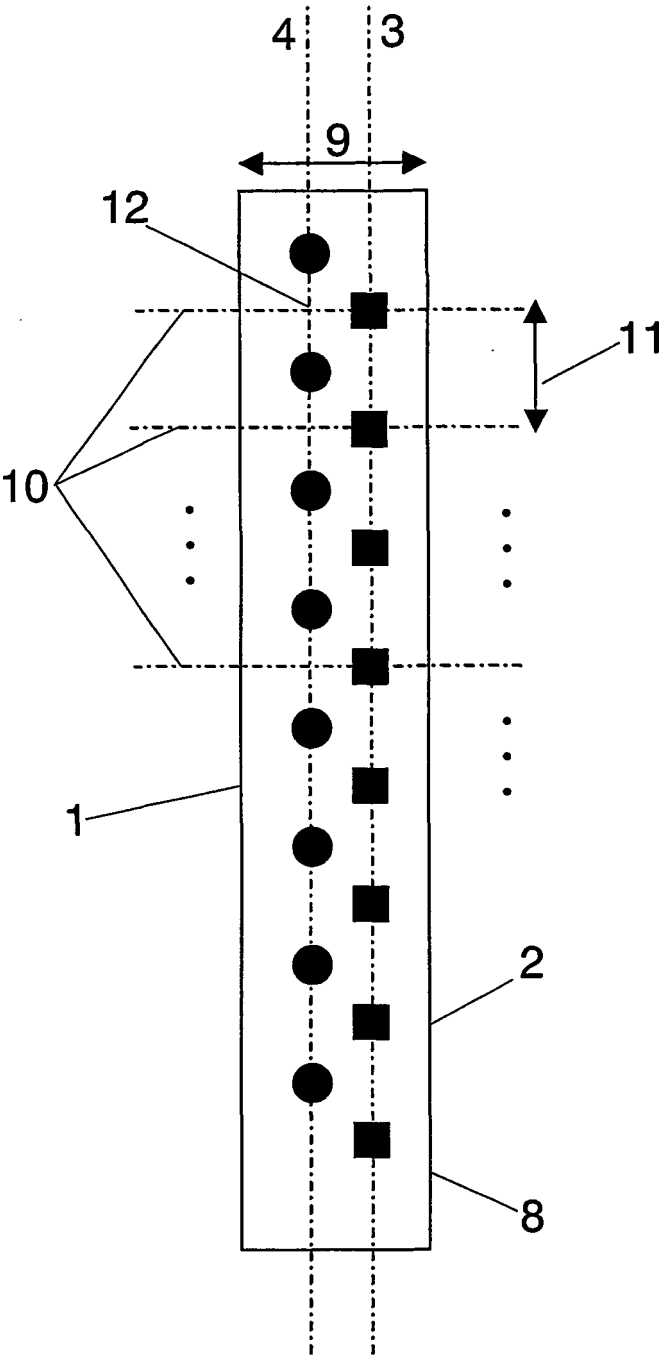


FIG. 2

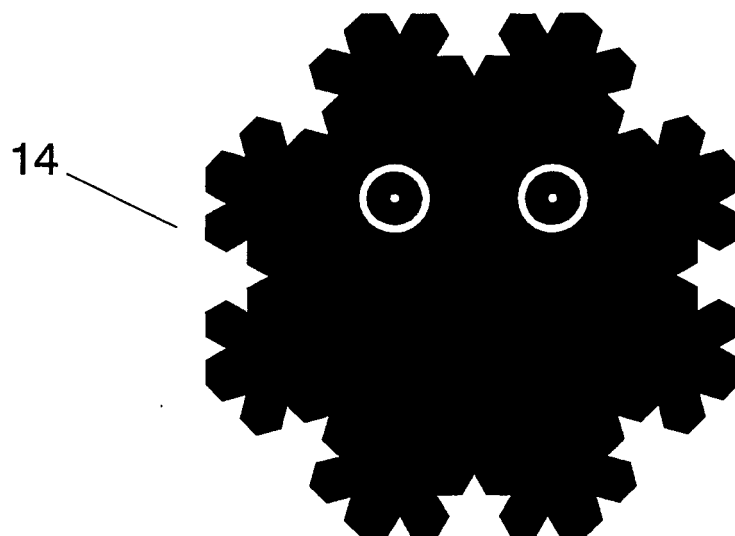
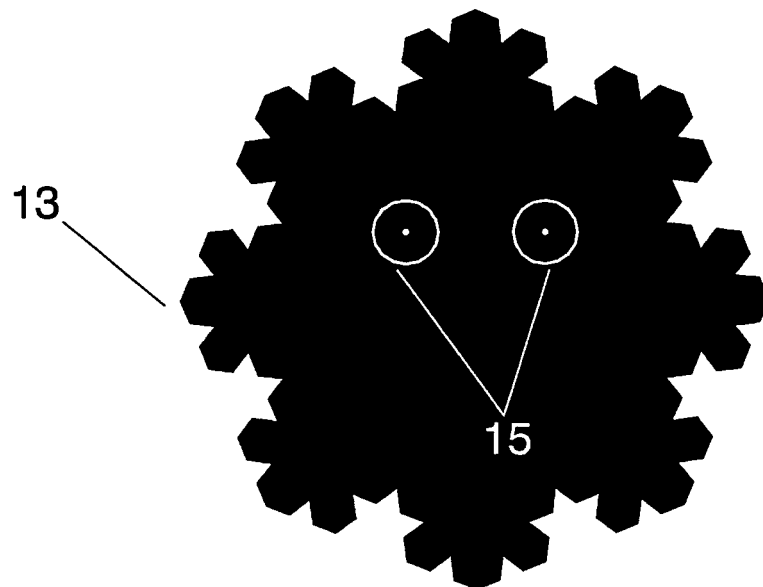


FIG. 3

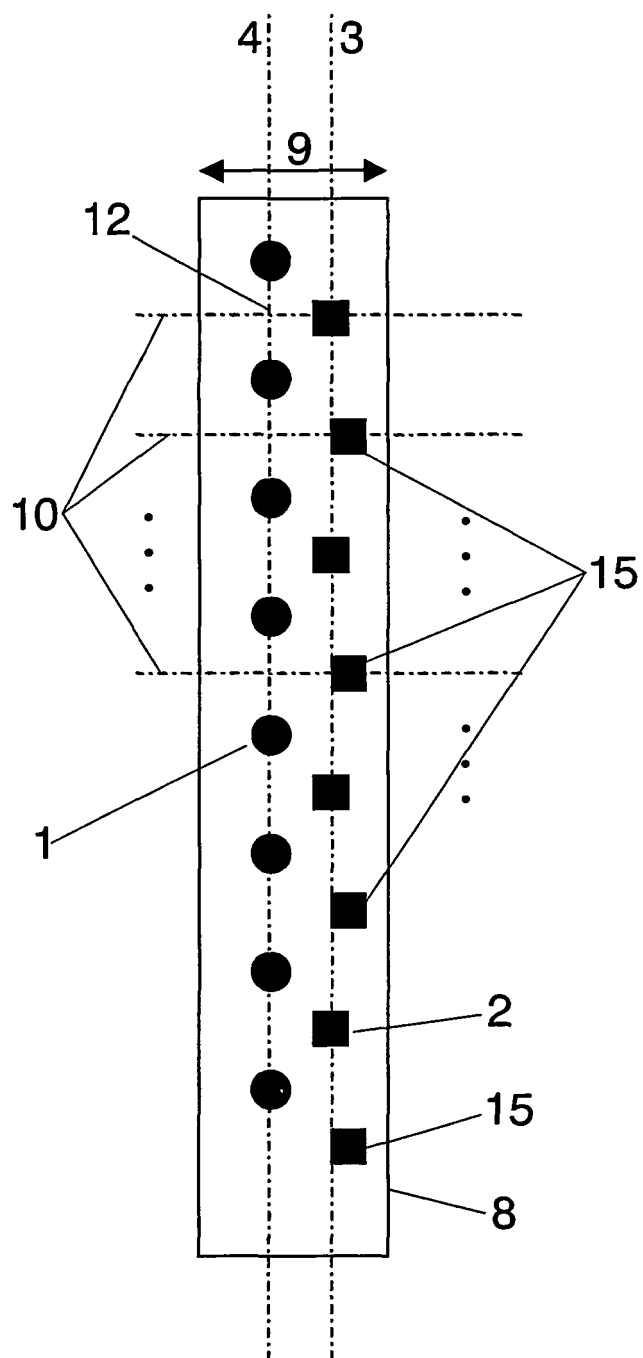


FIG. 4

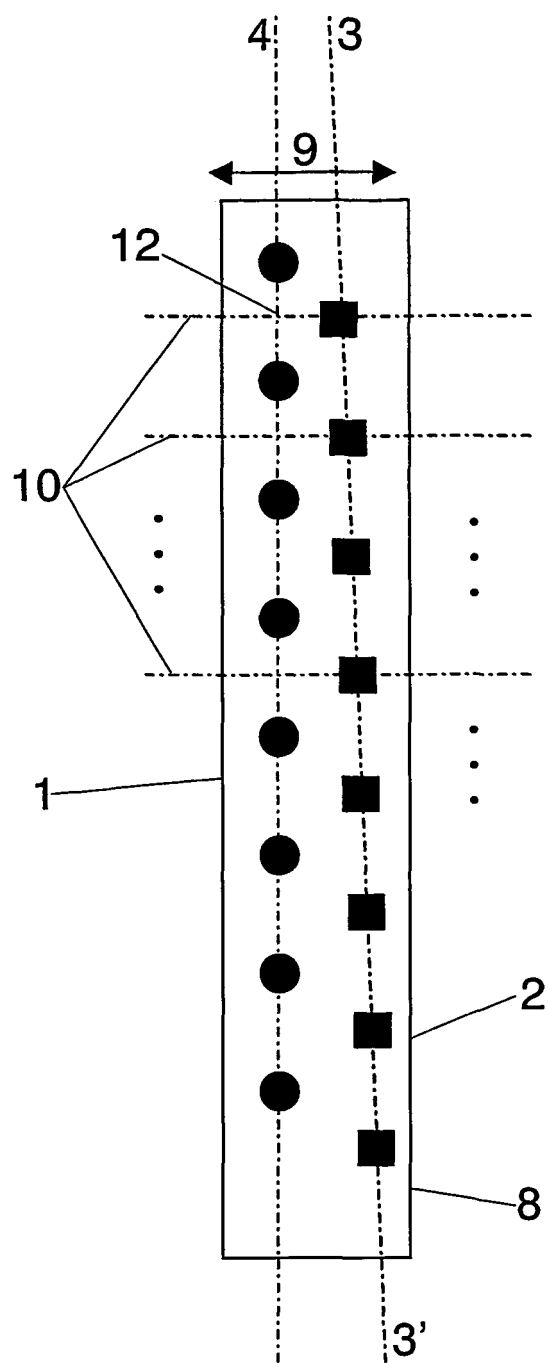


FIG. 5

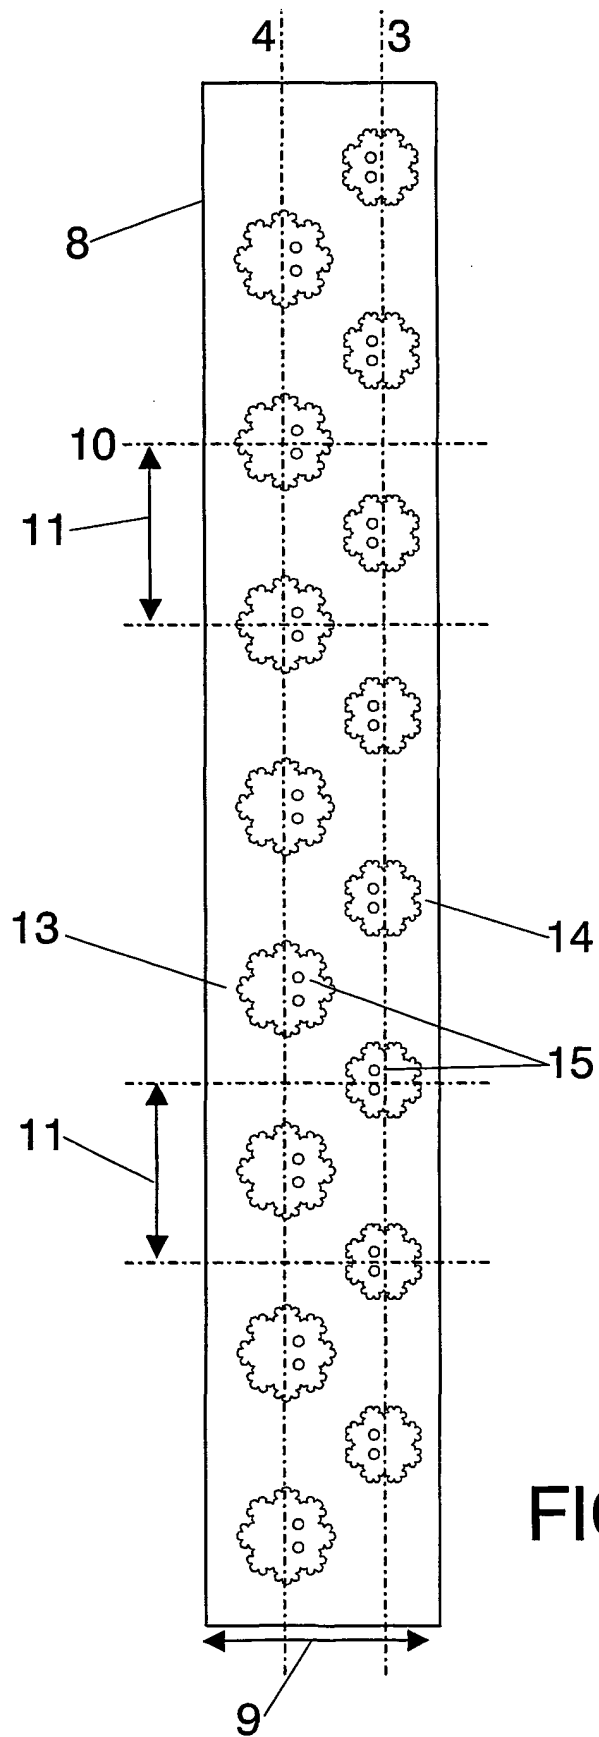


FIG. 6