

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 January 2004 (29.01.2004)



PCT

(10) International Publication Number
WO 2004/010532 A1

- (51) International Patent Classification⁷: **H01Q 01/36**, 5/00, 7/00
- (21) International Application Number: PCT/EP2002/007836
- (22) International Filing Date: 15 July 2002 (15.07.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicants (*for all designated States except US*): **FRACTUS, S.A.** [ES/ES]; Alcalde Barnils s/n, Edificio TESTA, mod. C3, Parque Empresarial Sant Joan Despi, 08190 SANT CUGAT DEL VALLES (Barcelona) (ES). **PUENTE BALIARDA, Carles** [ES/ES]; Alcalde Barnils s/n, Edificio Testa, Modulo C 3°, Parque Empresarial Sant Joan, 08190 SANT CUGAT DEL VALLES (Barcelona) (ES).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): **SOLER CASTANY, Jordi** [ES/ES]; Alcalde Barnils s/n, Edificio TESTA, mod. C3, Parque Empresarial Sant Joan Despi, 08190 SANT CUGAT DEL VALLES (Barcelona) (ES).
- (74) Agent: **CARPINTERO LOPEZ, Francisco**; Herrero & Asociados, S.L., Alcalá, 35, 28014 MADRID (ES).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: ANTENNA WITH ONE OR MORE HOLES

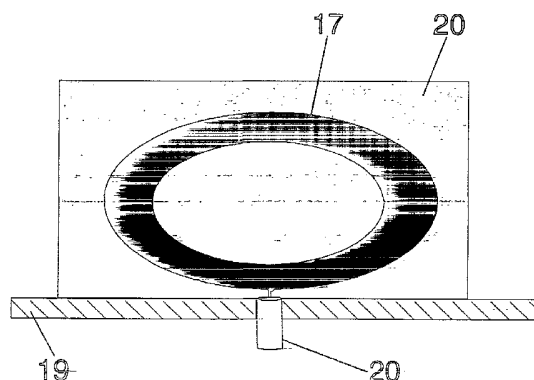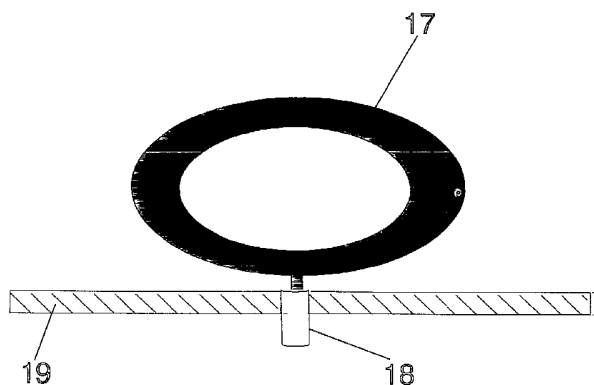

(57) Abstract: The invention refers to a new type of multihole antenna which is mainly suitable for mobile communications or in general to any other application where the integration of telecom systems or applications in a single antenna is important. The antenna consists of a radiating element which at least includes one hole. By means of this configuration, the antenna provides a broadband and multiband performance, and hence it features a similar behaviour through different frequency bands. Also, the antenna features a smaller size with respect to other prior art antennas operating at the same frequency.



European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

ANTENNA WITH ONE OR MORE HOLES

OBJECT OF THE INVENTION

5

The present invention relates to a novel multihole antenna which operates simultaneously at several frequencies with an improved impedance match. Also, the antenna features a smaller size with respect to other prior art antennas operating at the same frequency.

10

The radiating element of the novel multihole antenna consists of an antenna shaped by means of a polygonal, space-filling, loaded or multilevel shape, which at least includes one hole in the radiating antenna surface.

15

The invention refers to a new type of multihole antenna which is mainly suitable for mobile communications or in general to any other application where the integration of telecom systems or applications in a single antenna is important.

20

BACKGROUND OF THE INVENTION

25

The growth of the telecommunication sector, and in particular, the expansion of personal mobile communication systems are driving the engineering efforts to develop multiservice (multifrequency) and compact systems which require multifrequency and small antennas. Therefore, the use of a multisystem small antenna with a multiband and/or wideband performance, which provides coverage of the maximum number of services, is nowadays of notable interest since it permits telecom operators to reduce their costs and to minimize the environmental impact.

30

Most of the multiband reported antenna solutions use one or more radiators or branches for each band or service. An example is found in U.S. Patent No. 09/129176 entitled "Multiple band, multiple branch antenna for mobile phone".

5 One of the alternatives which can be of special interest when looking for antennas with a multiband and/or small size performance are multilevel antennas, Patent publication WO0122528 entitled "Multilevel Antennas", miniature space-filling antennas, Patent publication WO0154225 entitled "Space-filling miniature antennas", and loaded antennas, Patent application
10 PCT/EP01/11914 entitled "Loaded Antenna".

N.P. Agrawall ("New wideband monopole antennas", Antennas and Propagation Society International Symposium, 1997, IEEE, vol.1, pp.248-251) presents the results for a set of solid planar polygonal monopole antennas,
15 which are not the case of the present invention.

SUMMARY OF THE INVENTION

20 The key point of the invention is the shape of the radiating element which includes a set of holes practised in the radiating element. According to the present invention the antenna is a monopole or a dipole which includes at least one hole. Also, the antenna can include different holes with different shapes and sizes in a radiating element shaped by means of a polygonal, multilevel or loaded structure.

25 Due to the addition of the holes in the radiating element, the antenna can feature a multifrequency behaviour with a smaller size with respect to other prior art antennas operating at the same frequency. For the mentioned multifrequency behaviour, said hole in a monopole or dipole antenna features

an area of at least a 20% of the area included inside the external perimeter of the radiating element of said antenna.

5 The novel monopole or dipole includes a radiating element of a conducting or superconducting material with at least one hole, wherein the hole can be filled with a dielectric or partially filled by a conducting or superconducting material different from the conductor used for the radiating element.

10 In the novel antenna, the holes, or a portion of them, can be shaped with a geometry chosen from the set: multilevel, loaded, space-filling or polygonal structures. These geometries being understood as described in the previously identified patents.

The main advantage of this novel multihole antenna is two-folded:

- The antenna features a multifrequency behaviour
- The antenna can be operated at a lower frequency than most of the prior art antennas

20 BRIEF DESCRIPTION OF THE DRAWINGS

Fig.1 shows three different antennas including one hole; those are, a circular, an elliptical and a rectangular antenna. All the cases are polygonal shapes, including the circles and the ellipses as they can be considered polygonal structures with a large number of sides. Cases 1 to 3 show an antenna where the radiating element is a circle including one hole, wherein the size of the hole increases from cases 1 to 3, being the biggest one (3b) and the smallest one case (1a). Also, cases 1 to 3 includes a hole with a circular shape. Case 4 and 5 describe an elliptical monopole with an elliptical hole. In case (4b) the hole is not symmetrically located with respect to the

vertical axis of the radiating element. Case 6 shows a rectangular monopole including one rectangular hole. In all cases in Fig.1 the area of the hole is at least a 20% of the area included in the external perimeter of the radiating element.

5

Fig.2 shows three different types of multihole antenna. Case 7 shows a radiating element with a circular shape with two identical circular holes (7a) and with a third bigger hole (7b). The antennas in cases 8 and 9 are multihole antennas where the hole is shaped as a curve, said curve intersecting itself at a point. Cases 10 and 11 shows a polygonal radiating element with one and three holes, respectively, shaped using a multilevel structure.

10

In Fig.3, case 12 shows a radiating element with a triangular shape which includes one hole shaped by means of a space-filling curve (12b). Case 13 shows a multihole antenna with a circular hole, wherein the hole intersects the perimeter of the radiating element at a distance to the feeding point longer than three quarters of the external perimeter of the radiating element. Case 14 describes a radiating element (14a) composed by a rectangular and a circular shape, which includes two holes; those are, a circular-shaped hole (14b) and a hole shaped by means a multilevel structure (14c). Case 15 shows another radiating element with a hole with a circular shape (15b).

15

20

Fig. 4, case 16, shows a loaded radiating element (16a) including two rectangular holes (16b).

25

Fig. 5 shows two particular cases of multihole antenna. They consist of a monopole comprising a conducting or superconducting ground plane with an opening to allocate a coaxial cable (18) with its outer conductor connected to said ground plane and the inner conductor connected to the multihole radiating

30

element. The radiating element can be optionally placed over a supporting dielectric (20).

Fig.6 shows a multihole antenna consisting of a dipole wherein each of the two arms includes one hole. The lines (21) indicate the input terminals points. The two drawings display different configurations of the same basic dipole; in the lower drawing the radiating element is supported by a dielectric substrate (20).

Fig.7 shows an aperture antenna, wherein a multihole structure is practiced as an aperture antenna (3). The aperture is practiced on a conducting or superconducting structure (23).

Fig.8 shows an antenna array (24) including multihole radiating elements (17).

DETAILED DESCRIPTION OF SOME PREFERRED EMBODIMENTS

A preferred embodiment of the multihole antenna is a monopole configuration as shown in Fig.5. A handheld telephone case, or even a part of the metallic structure of a car or train can act as such a ground counterpoise. The ground and the monopole arm (17) (here a particular embodiment of the arm is represented, but any of the mentioned multihole antenna structures could be taken instead) are excited as usual in prior art monopole by means of, for instance, a transmission line (18). Said transmission line is formed by two conductors, a first conductor is connected to a point of the conducting or superconducting multihole structure and the second conductor is connected to the ground plane or to a ground counterpoise. In Fig.5, a coaxial cable (18) has been taken as a particular case of transmission line, but it is clear to any skilled in the art that other transmission lines (such as for instance a microstrip arm) could be used to

excite the monopole. Optionally, and following the scheme just described, the multihole monopole can be printed, etched or attached, for instance, over a dielectric substrate (20).

5 Fig.6 describes another preferred embodiment of the invention. A two-arm antenna dipole is constructed comprising two conducting or superconducting parts, each part being a multihole structure. For the sake of clarity but without loss of generality, a particular case of the multihole antenna (17) has
10 been chosen here; obviously, other structures, as for instance, those described in Fig.1 could be used instead. In this particular case, two points (21) on the perimeter of each arm can be taken as the input part of the dipole structure. In other embodiments, other point can be takes as the input terminals. The terminals (21) have been drawn as conducting or
15 superconducting wires, but as it is clear to those skilled in the art, such terminals could be shaped following any other pattern as long as they are kept small in terms of the operating wavelength. The skilled in the art will notice that, the arms of the dipoles can be rotated and folded in different ways to finely modify the input impedance or the radiation properties of the antenna, such as, for instance, polarization.

20 Another preferred embodiment of a multihole dipole antenna is also shown in Fig. 6 where the multihole arms are printed over a dielectric substrate (20); this method is particularly convenient in terms of cost and mechanical robustness when the shape of the radiating element contains a high number
25 of polygons, as happens with multilevel structures. Any of the well-known printed circuit fabrication techniques can be applied to pattern the notched-fed structure over the dielectric substrate. Said dielectric substrate can be, for instance, a glass-fibre board, a teflon based substrate (such as Cuclad[®]) or other standard radiofrequency and microwave substrates (as for instance

Rogers 4003[®] or Kapton[®]). The dielectric substrate can be, for instance, a portion of a window glass if the antenna is to be mounted in a motor vehicle such as a car, a train or an airplane, to transmit or receive radio, TV, cellular telephone (GSM900, GSM1800, UMTS) or other communication services electromagnetic waves. Of course, a balun network can be connected or integrated in the input terminals of the dipole to balance the current distribution among the two dipole arms.

Another preferred embodiment of the multihole antenna is an aperture configuration as shown in Fig.7. In this figure the multihole elliptical structure (3) forms a slot or gap impressed over a conducting or superconducting sheet (23). Such sheet can be, for instance, a sheet over a dielectric substrate in a printed circuit board configuration, a transparent conductive film such as those deposited over a glass window to protect the interior of a car from heating infrared radiation, or can even be apart of the metallic structure of a handheld telephone, a car, train, boat or airplane. The feeding scheme can be any of the well known in conventional slot antenna and it does not become an essential part of the present invention. In the illustration in Fig.7, a coaxial cable (22) has been used to feed the antenna, with one of the conductors connected to one side of the conducting sheet and the other connected at the other side of the sheet across the slot. A microstrip line could be used, for instance, instead of a coaxial cable.

Fig.8 describes another preferred embodiment. It consist of an antenna array (24) which includes at least one multihole dipole antenna (17).

CLAIMS

1.- A multihole antenna characterized in that its radiating element includes at least one hole, wherein said hole has an area of at least a 20% of the area included inside the external perimeter of the radiating element of said antenna.

2.- An antenna according to claim 1 characterized in that the radiating element is a conducting or superconducting body, said body including at least one hole which can be filled with a dielectric or partially filled by a conducting or superconducting material different from the conductor used for the radiating element.

3.- An antenna according to claim 1 or 2 characterized in that the radiating element includes one hole.

4.- An antenna according to claim 1 or 2 characterized in that the radiating element includes at least two holes.

5.- An antenna according to claim 1, 2, 3 or 4 wherein the perimeter of the radiating element, or the perimeter of at least one of the holes, or both the perimeter of the radiating element and the perimeter of at least one of the holes of said radiating element is shaped with a geometry chosen from the following set: triangular, square, rectangular, trapezoidal, pentagonal, hexagonal, heptagonal, octagonal, circular or elliptical.

6.- An antenna according to claim 1, 2, 3, 4 or 5 wherein at least a portion of said multihole structure is a multilevel or loaded structure.

7.- An antenna according to claim 1, 2, 3, 4, 5 or 6 wherein at least the perimeter of at least one hole is a curve composed by a minimum of two

segments and a maximum of nine segments which are connected in such a way that each segment forms an angle with their neighbours, i.e., no pair of adjacent segments define a larger straight segment.

5 8.- An antenna according to claim 1, 2, 3, 4, 5, 6 or 7 wherein at least part of the perimeter of at least one hole is shaped by means of a space-filling curve.

10 9.- An antenna according to claim 1, 2, 3, 4, 5, 6, 7 or 8 wherein at least one of the holes intersects the perimeter of the radiating element at a distance to its feeding point shorter than a quarter, or longer than three quarters, of the external perimeter of the radiating element.

15 10.- An antenna according to claim 1, 2, 3, 4, 5, 6, 7, 8 or 9 wherein at least one of the holes is shaped as a curve, said curve intersecting itself at least at one point.

20 11.- An antenna according to any of the preceding claims characterized in that is an aperture antenna wherein the shape of its aperture is the same as any of the shapes of the radiating elements of the antennas described in the preceding claims.

12.- An antenna according to any of the preceding claims characterized in that the antenna is a monopole antenna or a dipole antenna.

25 13.- An antenna wherein the antenna is an element of an antenna array, said array including at least a multihole antenna.

30 14.- An antenna according to any of the preceding claims, characterized in that the antenna features a multiband behaviour, a broadband behaviour or a combination of both.

15.- A multihole antenna characterized in that the radiating element is shorter than a quarter of the longest operating wavelength.

5


10

15

20

25

30

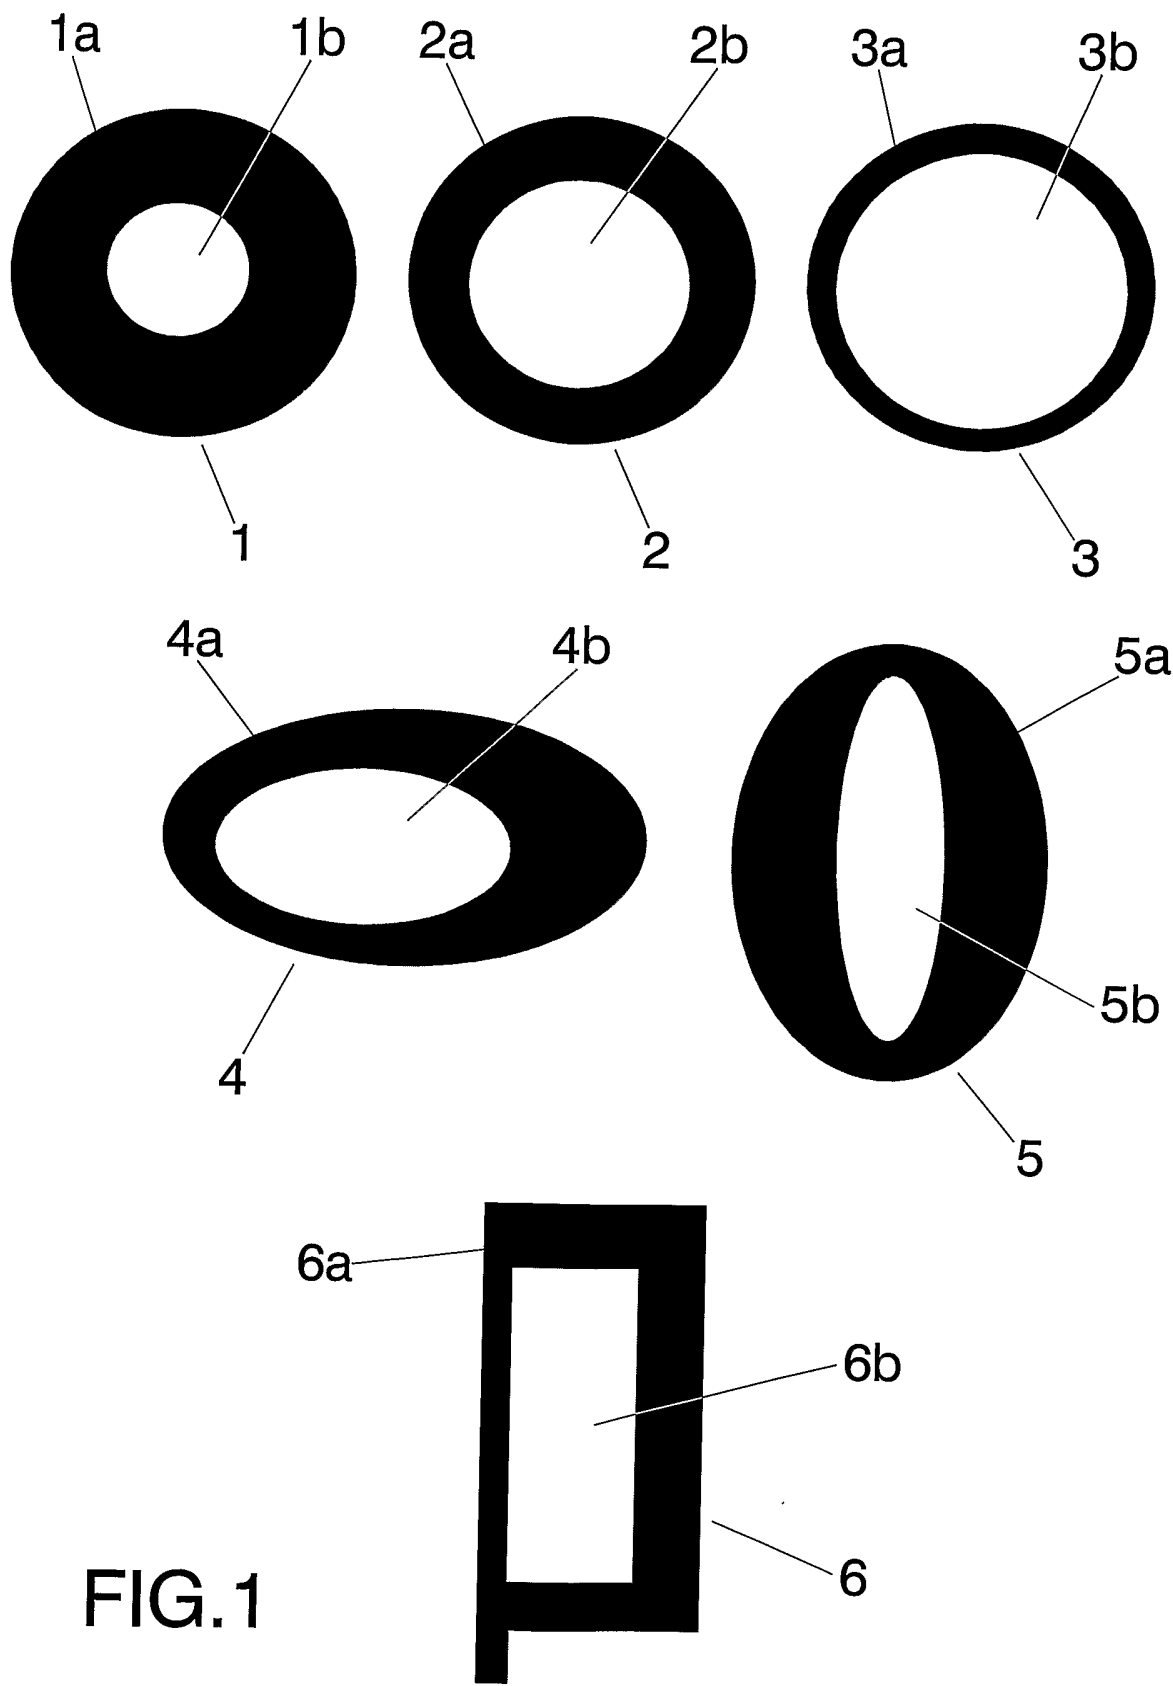

2/8

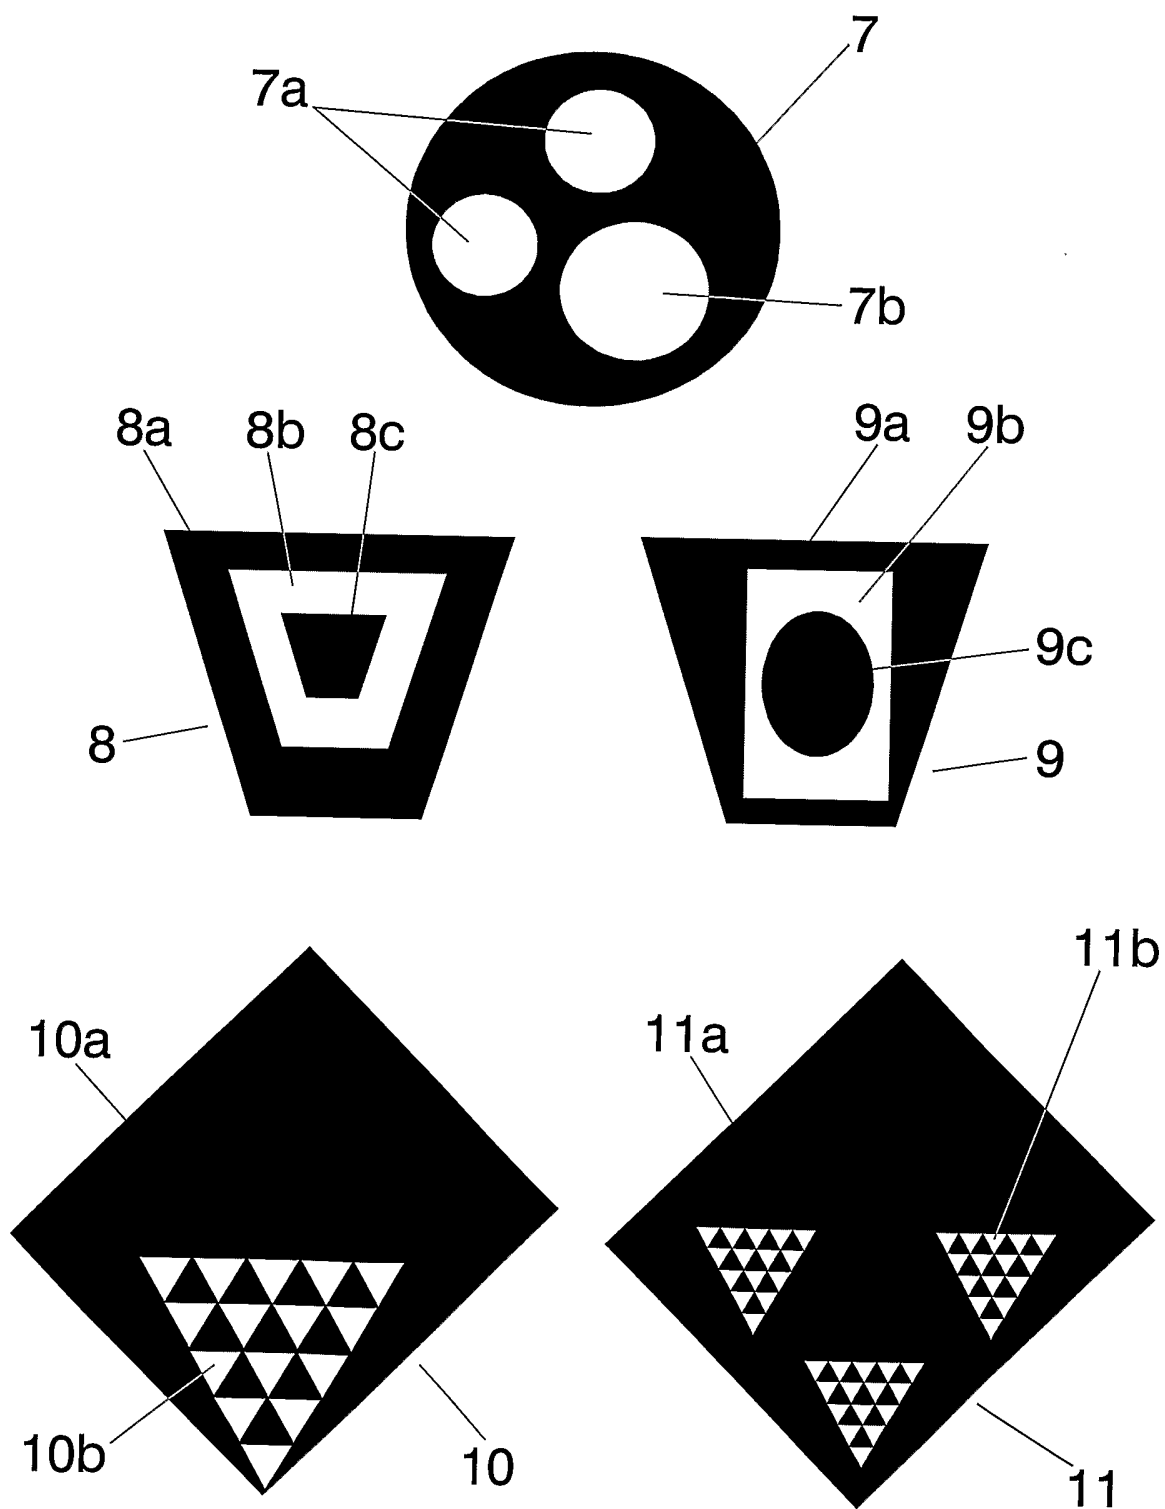


FIG.2

3/8

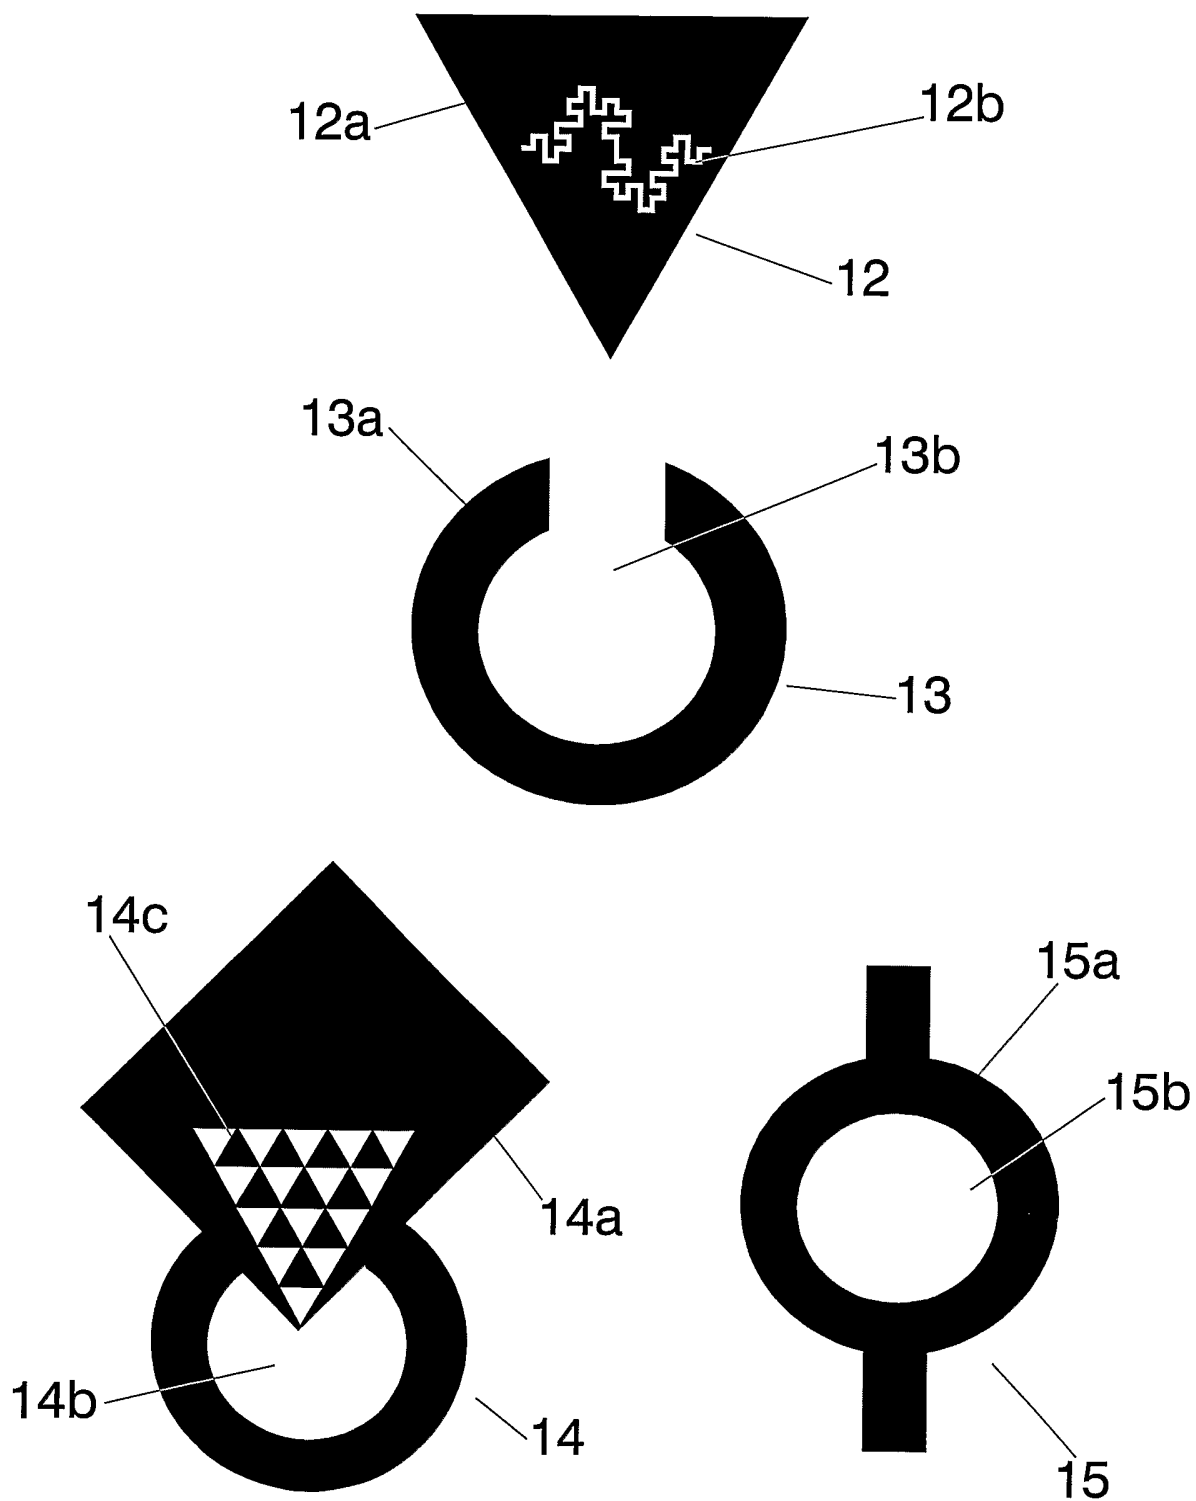


FIG.3

4/8

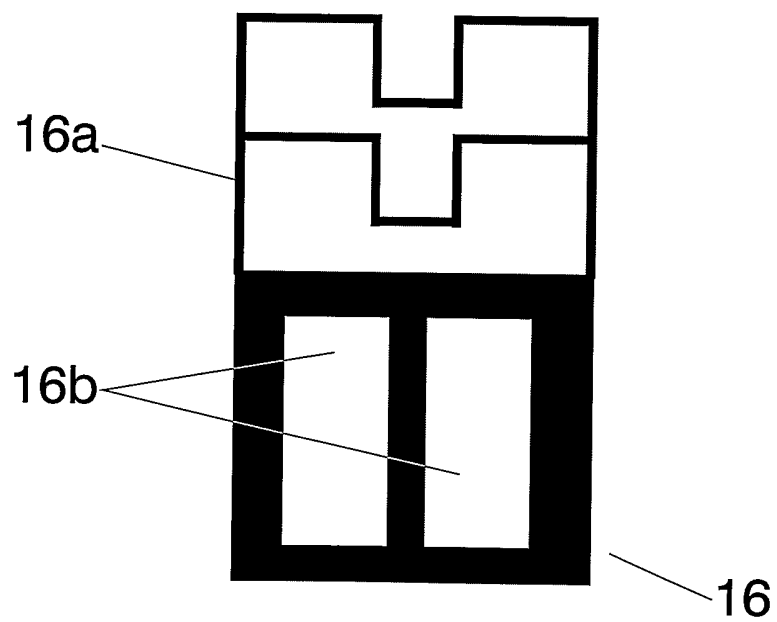


FIG. 4

5/8

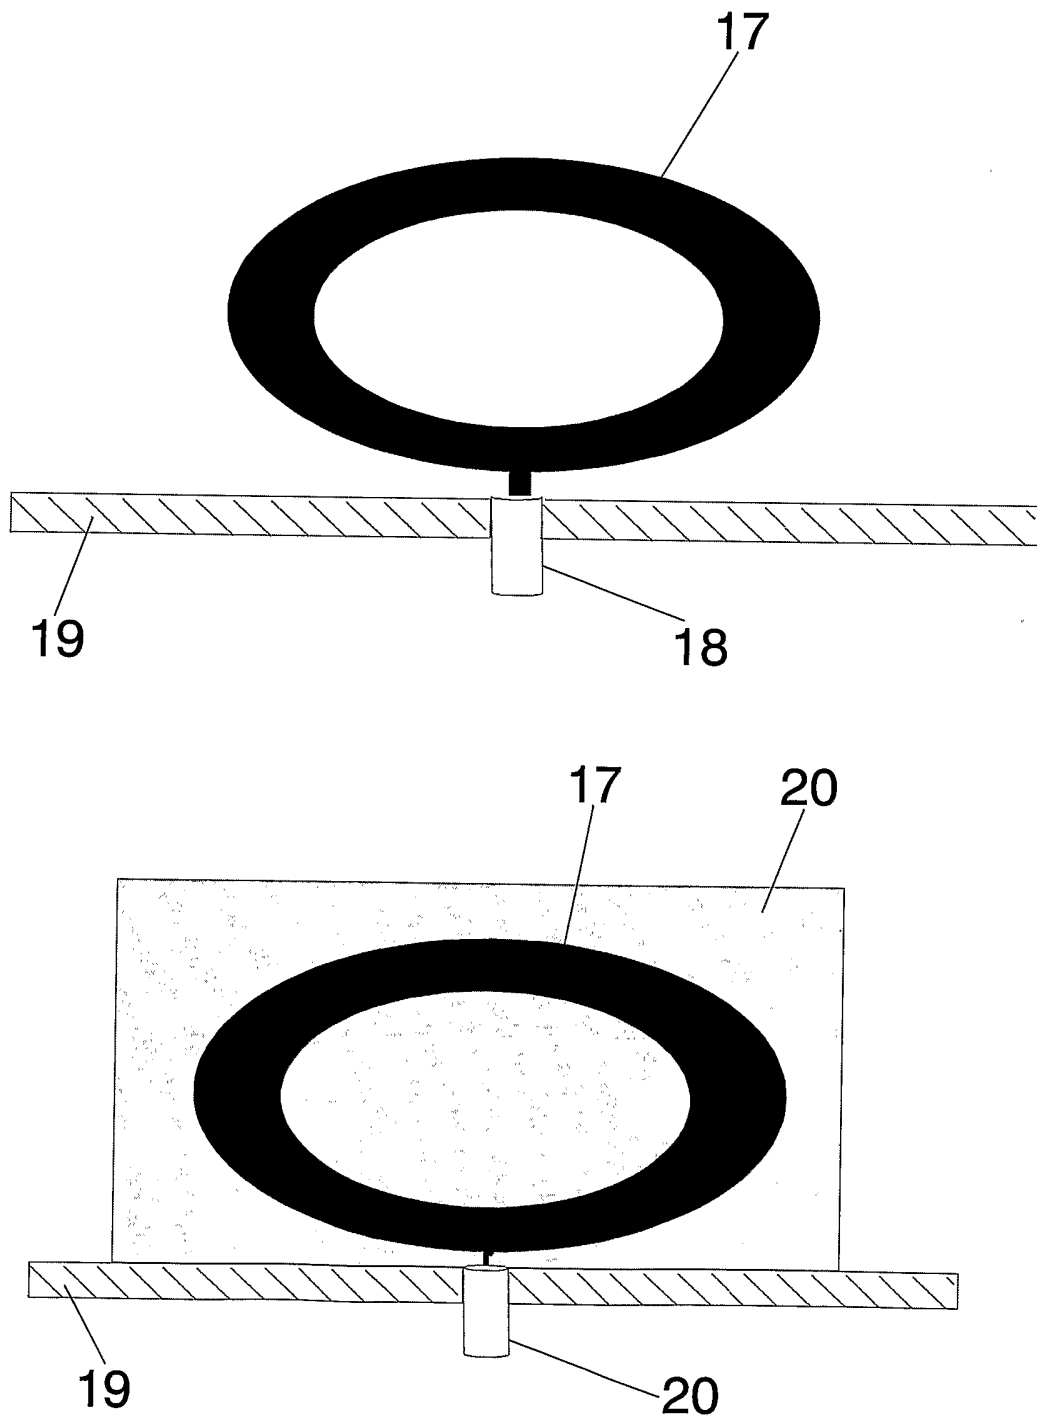


FIG.5

6/8

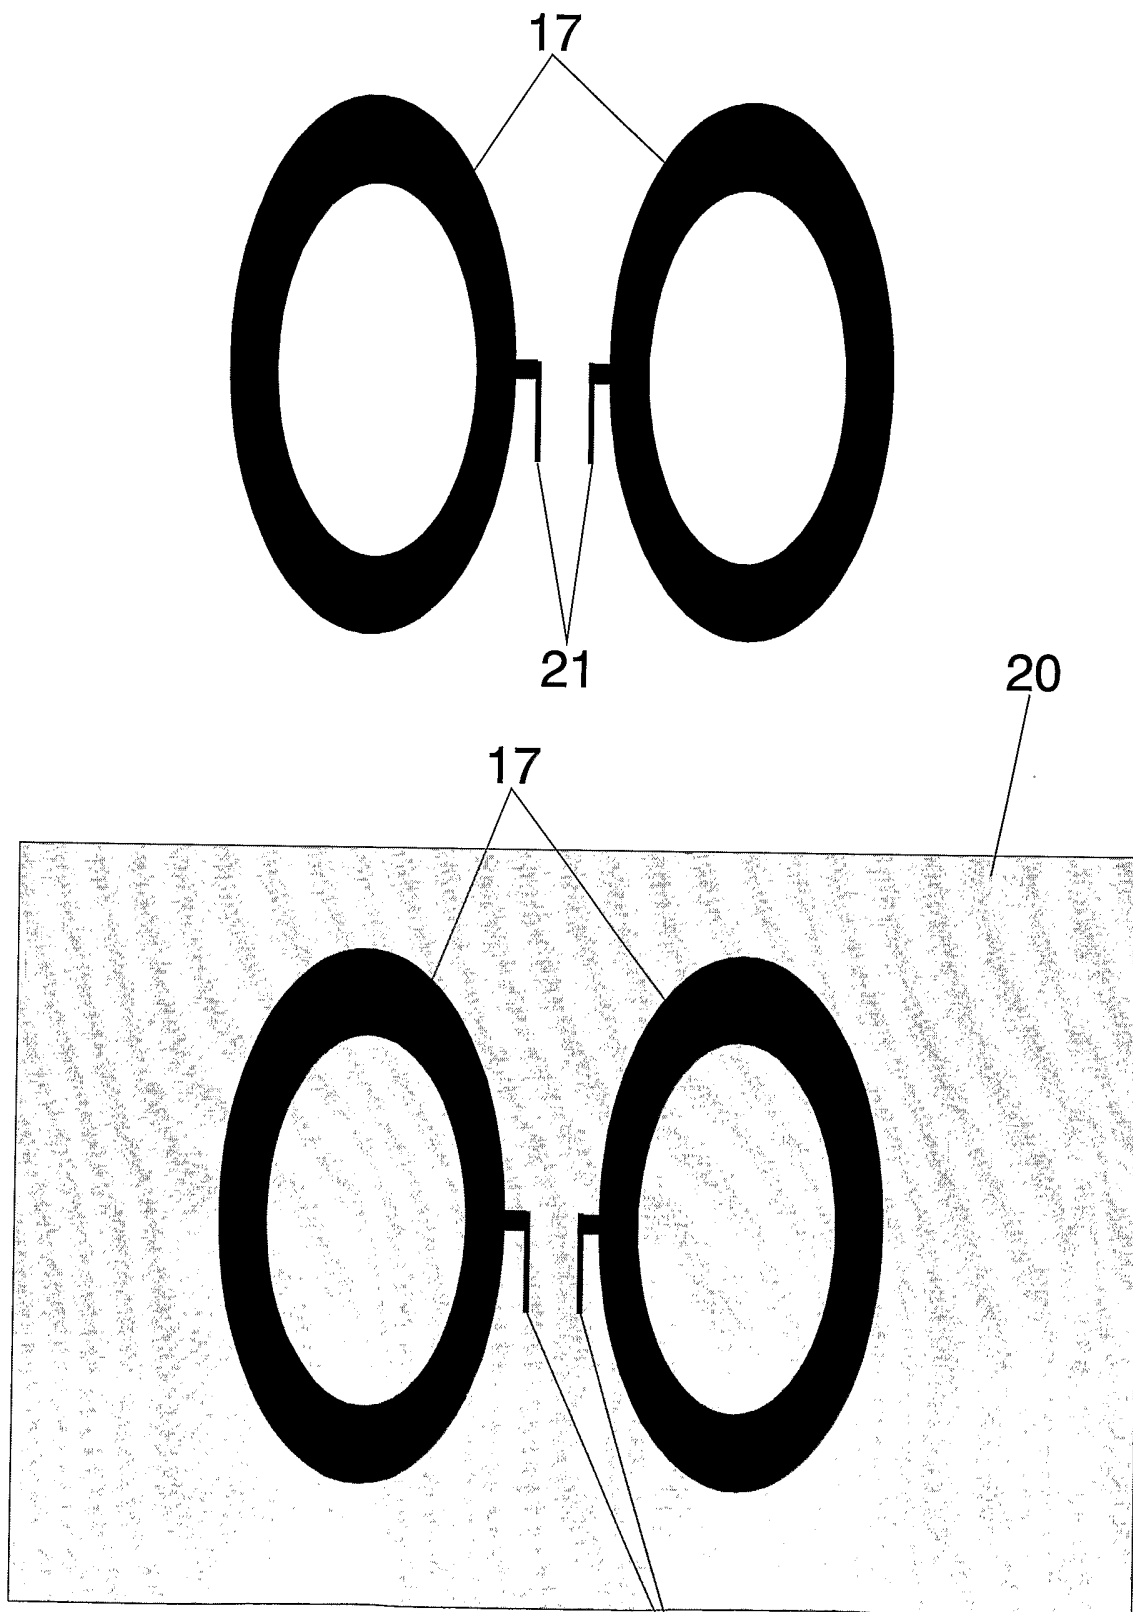


FIG. 6 21

7/8

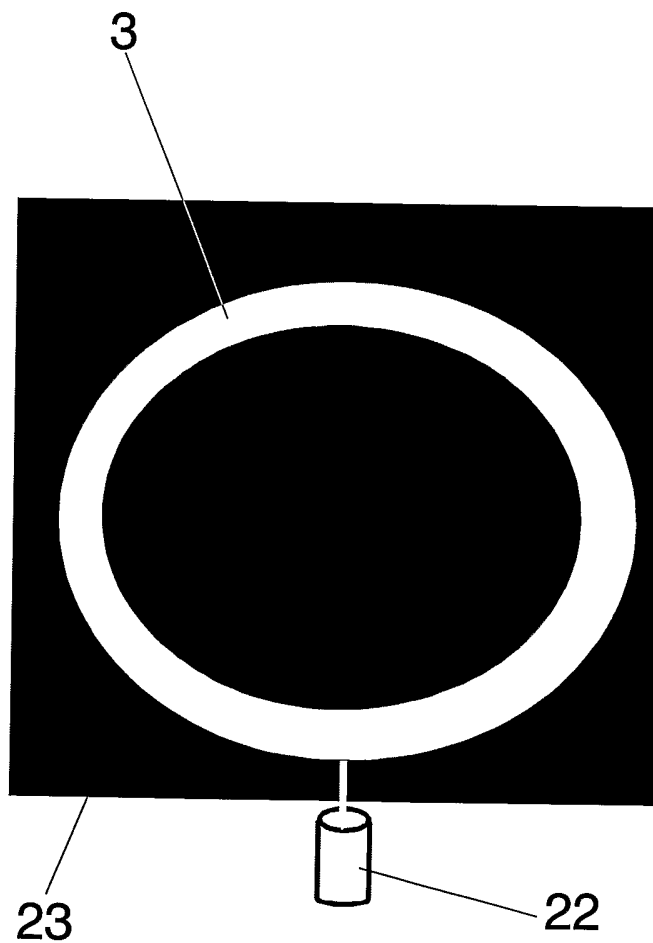


FIG. 7

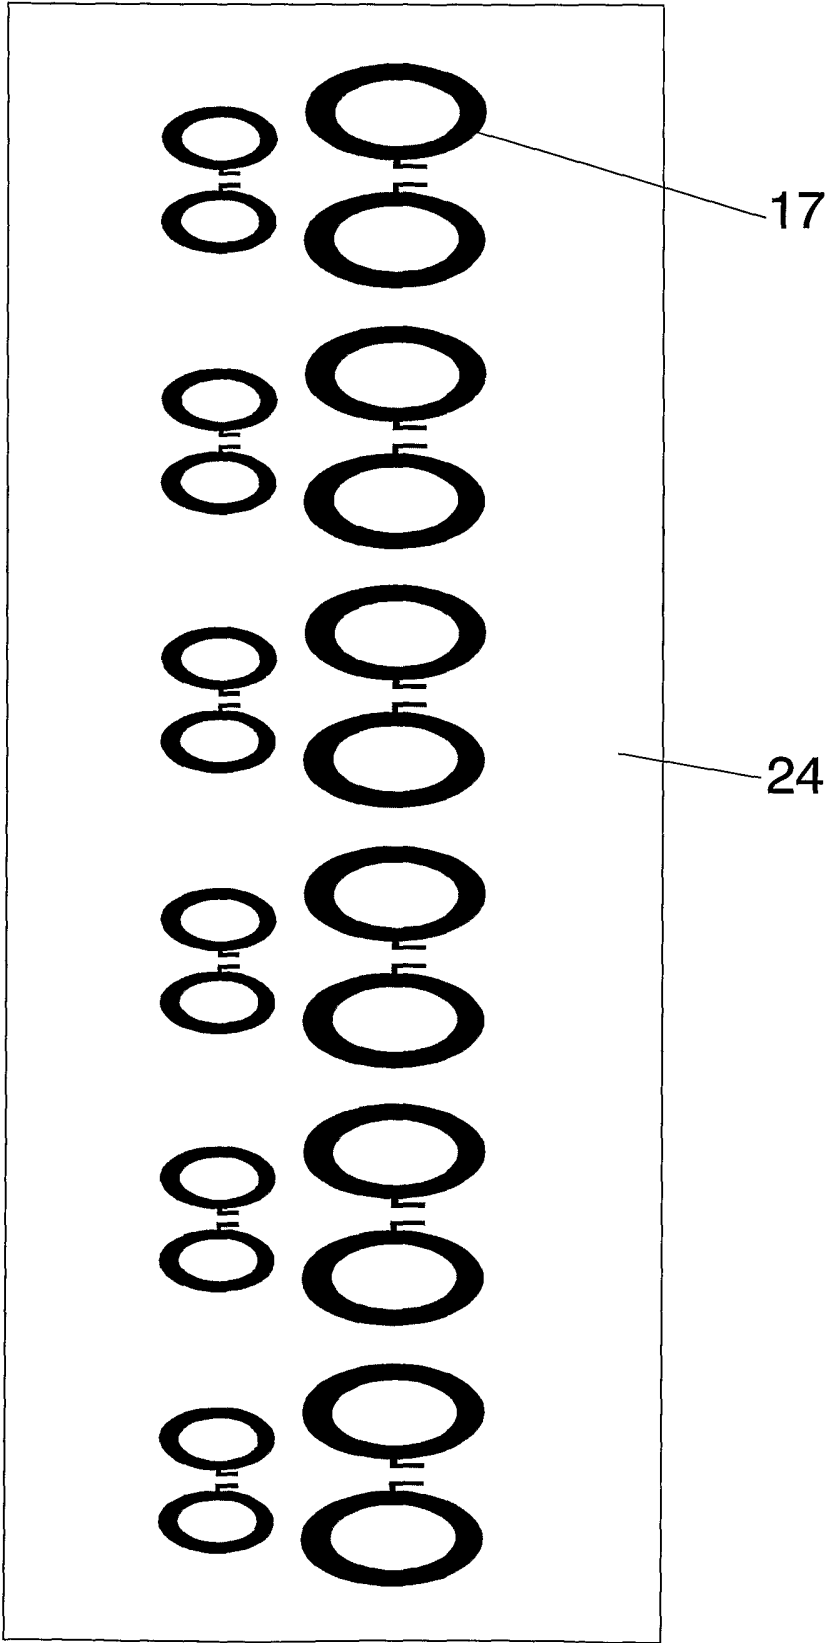


FIG.8

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 02/07836

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H01Q1/36 H01Q5/00 H01Q7/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PUENTE C ET AL: "FRACTAL MULTIBAND ANTENNA BASED ON THE SIERPINSKI GASKET" ELECTRONICS LETTERS, IEE STEVENAGE, GB, vol. 32, no. 1, 4 January 1996 (1996-01-04), pages 1-2, XP006004544 ISSN: 0013-5194 left-hand column; figure 1 ---	1-15
X	WO 01 22528 A (SOLER CASTANY JORDI ; FRACTUS S A (ES); ANGUERA PROS JAUME (ES); BO) 29 March 2001 (2001-03-29) the whole document & EP 1 223 637 A 17 July 2002 (2002-07-17) --- -/--	1-15

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *Z* document member of the same patent family

Date of the actual completion of the international search

15 April 2003

Date of mailing of the international search report

29/04/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel: (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Dollinger, F

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 02/07836

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 195 048 B1 (AMANO TAKASHI ET AL) 27 February 2001 (2001-02-27) abstract; figures -----	1-3, 5-7, 9-11, 13-15
A	SONG C T P ET AL: "Multi-circular loop monopole antenna" ELECTRONICS LETTERS, IEE STEVENAGE, GB, vol. 36, no. 5, 2 March 2000 (2000-03-02), pages 391-393, XP006014920 ISSN: 0013-5194 "Introduction", "Antenna design", Fig. 1 -----	1-15
A	WO 01 54225 A (FRACTUS S A ; ANGUERA PROS JAIME (ES); PUENTE BALIARDA CARLES (ES);) 26 July 2001 (2001-07-26) the whole document -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 02/07836

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0122528	A	29-03-2001	WO 0122528 A1	29-03-2001
			AU 5984099 A	24-04-2001
			BR 9917493 A	16-07-2002
			EP 1223637 A1	17-07-2002
			US 2002140615 A1	03-10-2002
US 6195048	B1	27-02-2001	WO 9928990 A1	10-06-1999
WO 0154225	A	26-07-2001	WO 0154225 A1	26-07-2001
			AU 3150000 A	31-07-2001
			EP 1258054 A1	20-11-2002