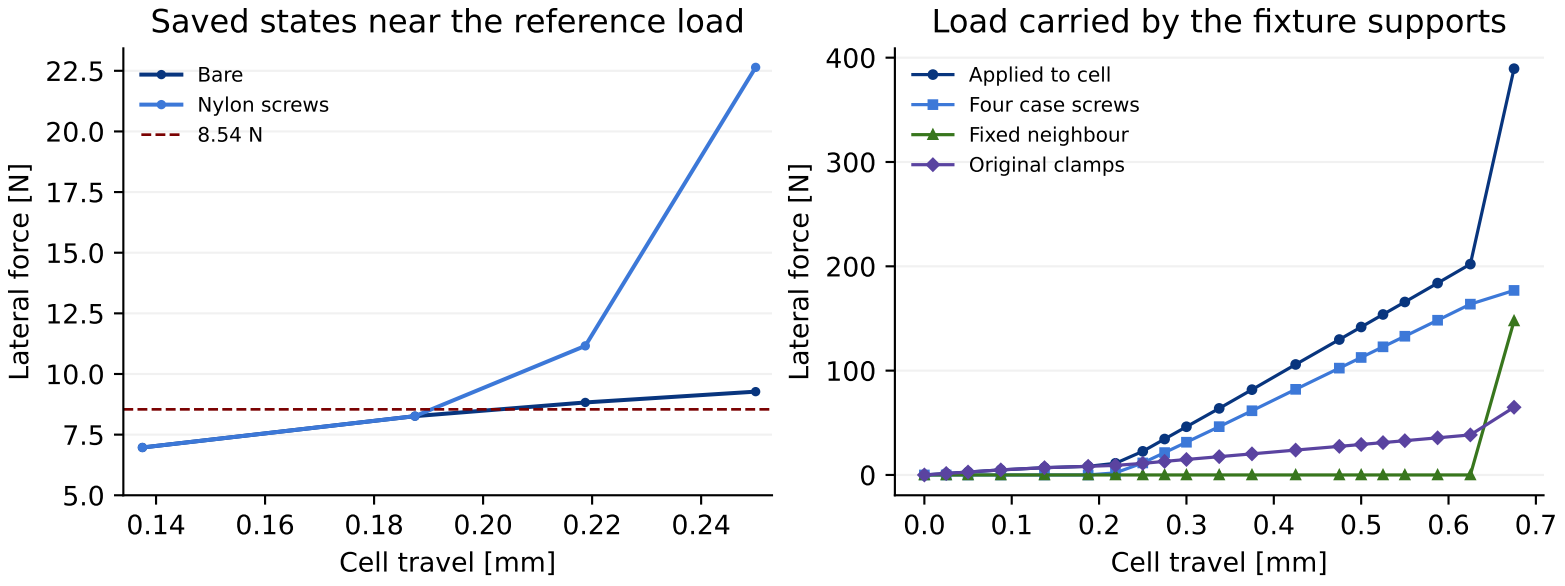
Saved states near the reference load
Bare
Nylon screws
8.54 N
Lateral force [N]
Cell travel [mm]
22.5
20.0
17.5
15.0
12.5
10.0
7.5
5.0
0.14
0.16
0.18
0.20
0.22
0.24
Load carried by the fixture supports
Applied to cell
Four case screws
Fixed neighbour
Original clamps
Lateral force [N]
Cell travel [mm]
400
300
200
100
0
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0.7