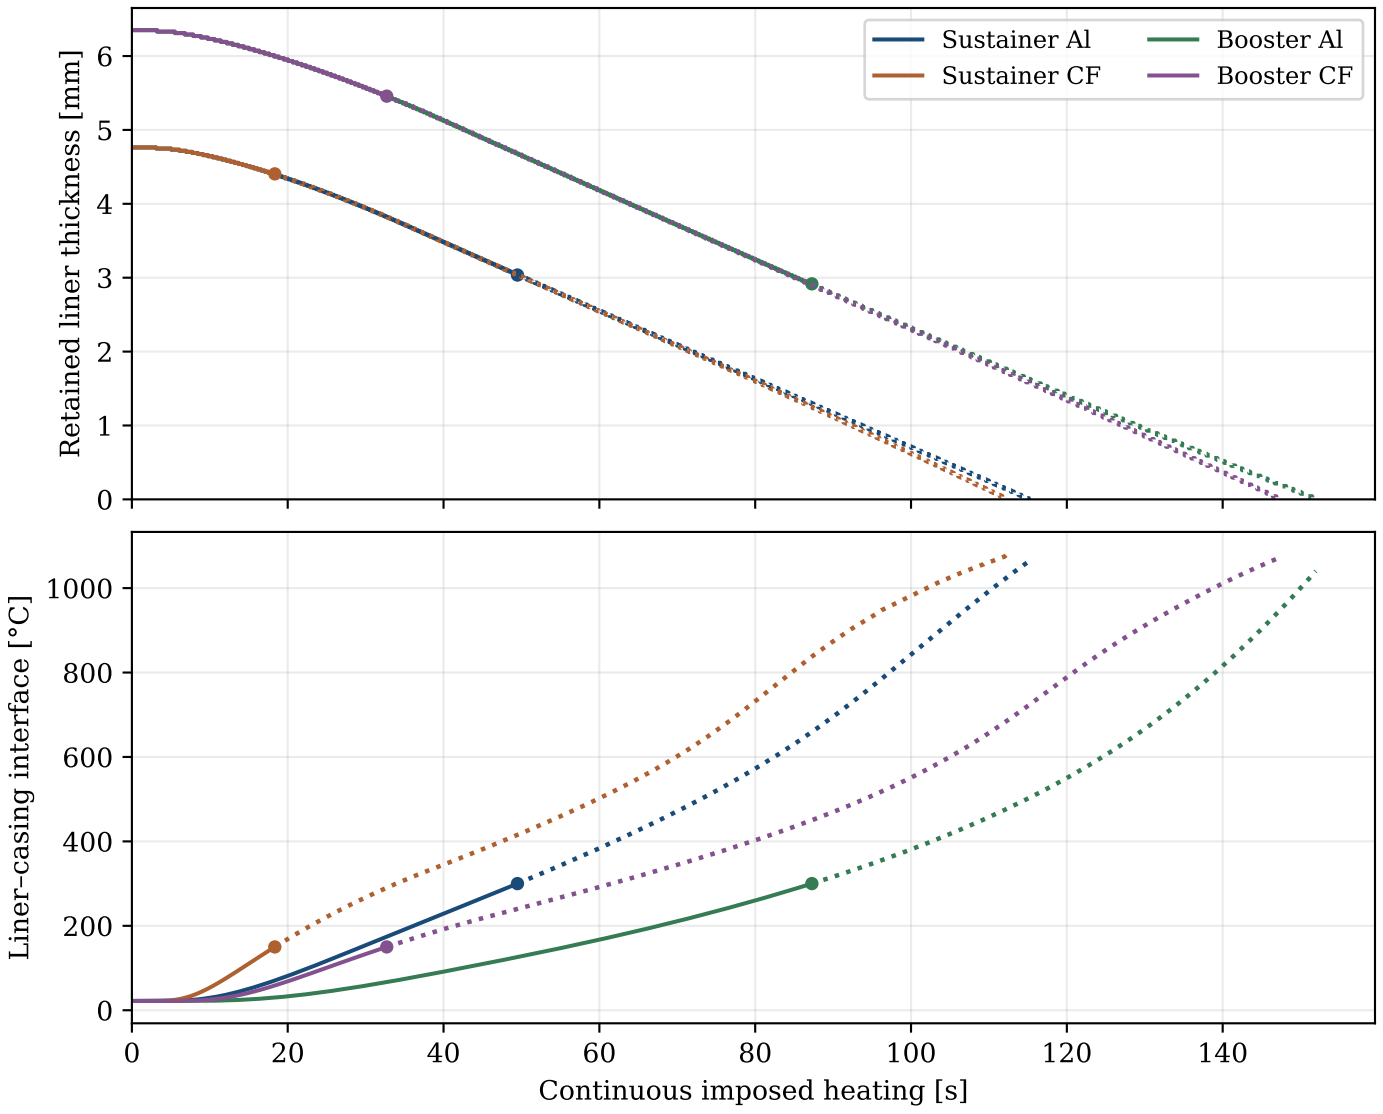
Sustainer Al
Sustainer CF
Booster Al
Booster CF
Retained liner thickness [mm]
0
1
2
3
4
5
6
Liner–casing interface [°C]
0
200
400
600
800
1000
0
20
40
60
80
100
120
140
Continuous imposed heating [s]