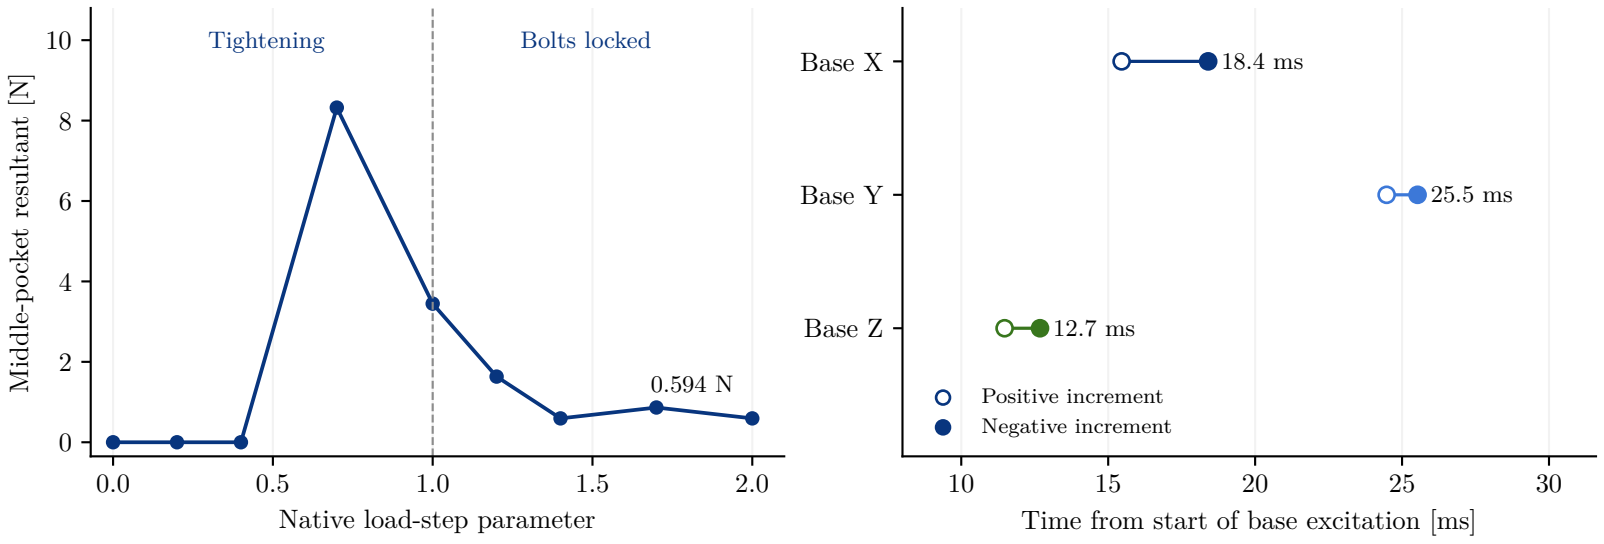

Tightening
Bolts locked
Middle-pocket resultant [N]
0.594 N
Native load-step parameter
Base X
Base Y
Base Z
18.4 ms
25.5 ms
12.7 ms
Positive increment
Negative increment
Time from start of base excitation [ms]