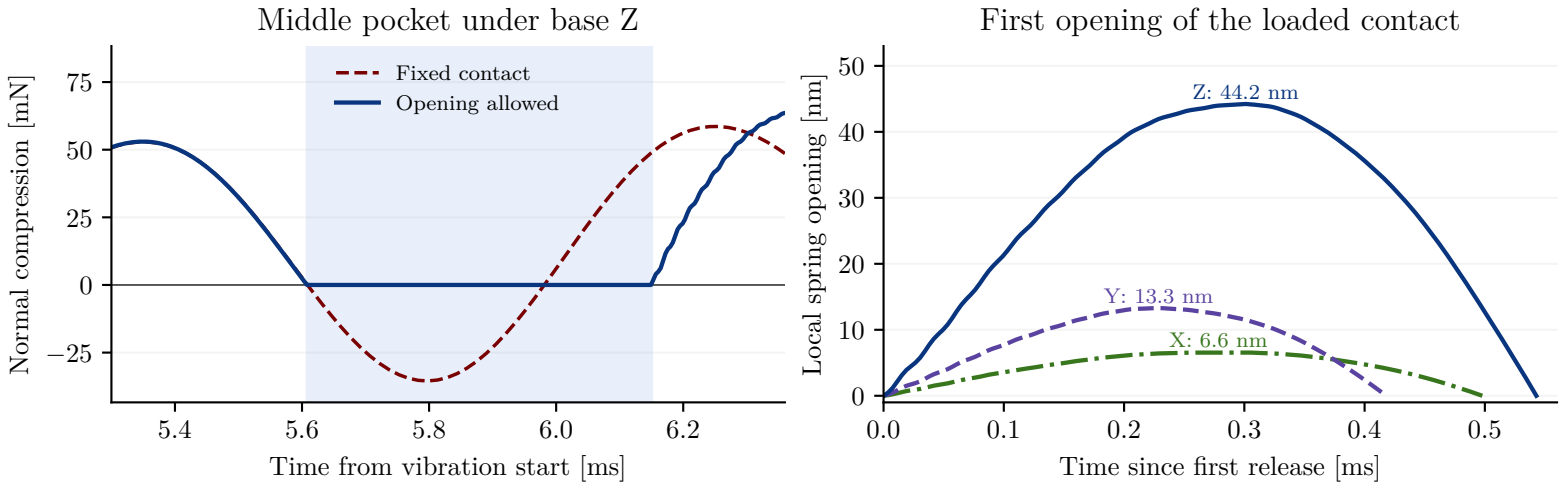

Middle pocket under base Z
Fixed contact
Opening allowed
Normal compression [mN]
75
50
25
0
−25
5.4
5.6
5.8
6.0
6.2
Time from vibration start [ms]
First opening of the loaded contact
Z: 44.2 nm
Y: 13.3 nm
X: 6.6 nm
Local spring opening [nm]
50
40
30
20
10
0
0.0
0.1
0.2
0.3
0.4
0.5
Time since first release [ms]