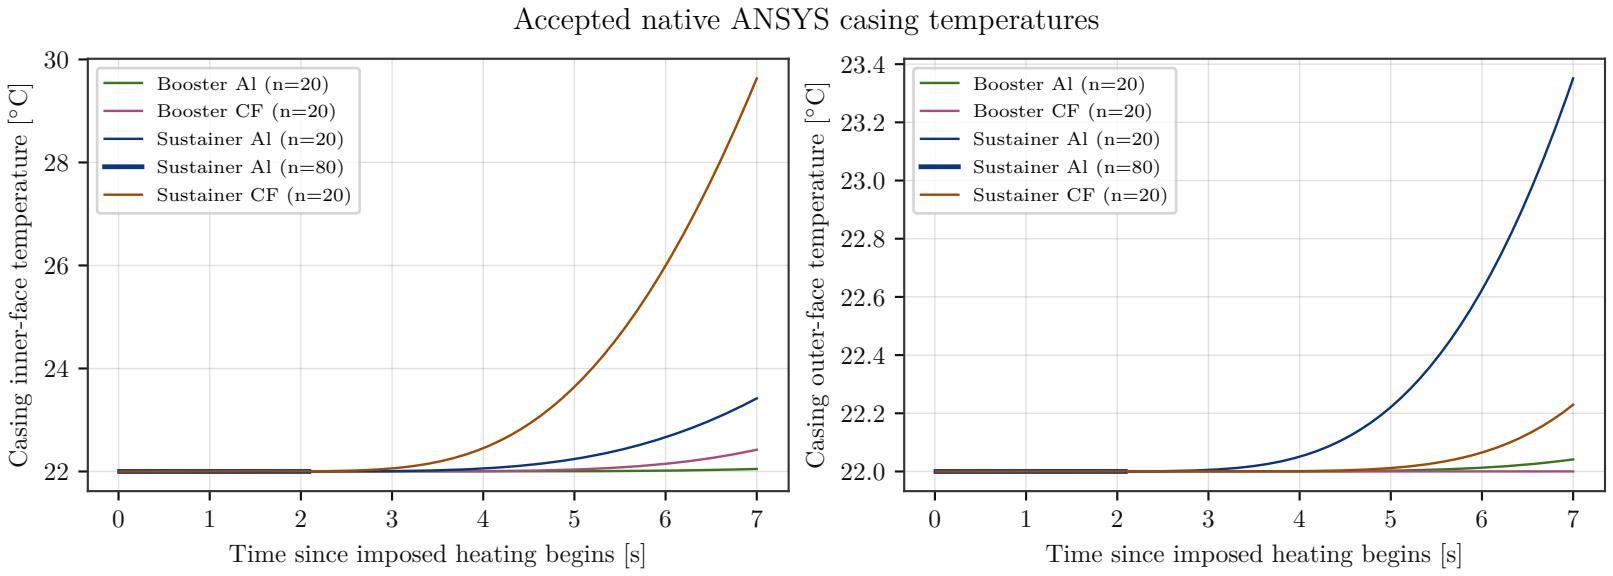

Accepted native ANSYS casing temperatures
Booster Al (n=20)
Booster CF (n=20)
Sustainer Al (n=20)
Sustainer Al (n=80)
Sustainer CF (n=20)
Casing inner-face temperature [°C]
Time since imposed heating begins [s]
Casing outer-face temperature [°C]
Time since imposed heating begins [s]