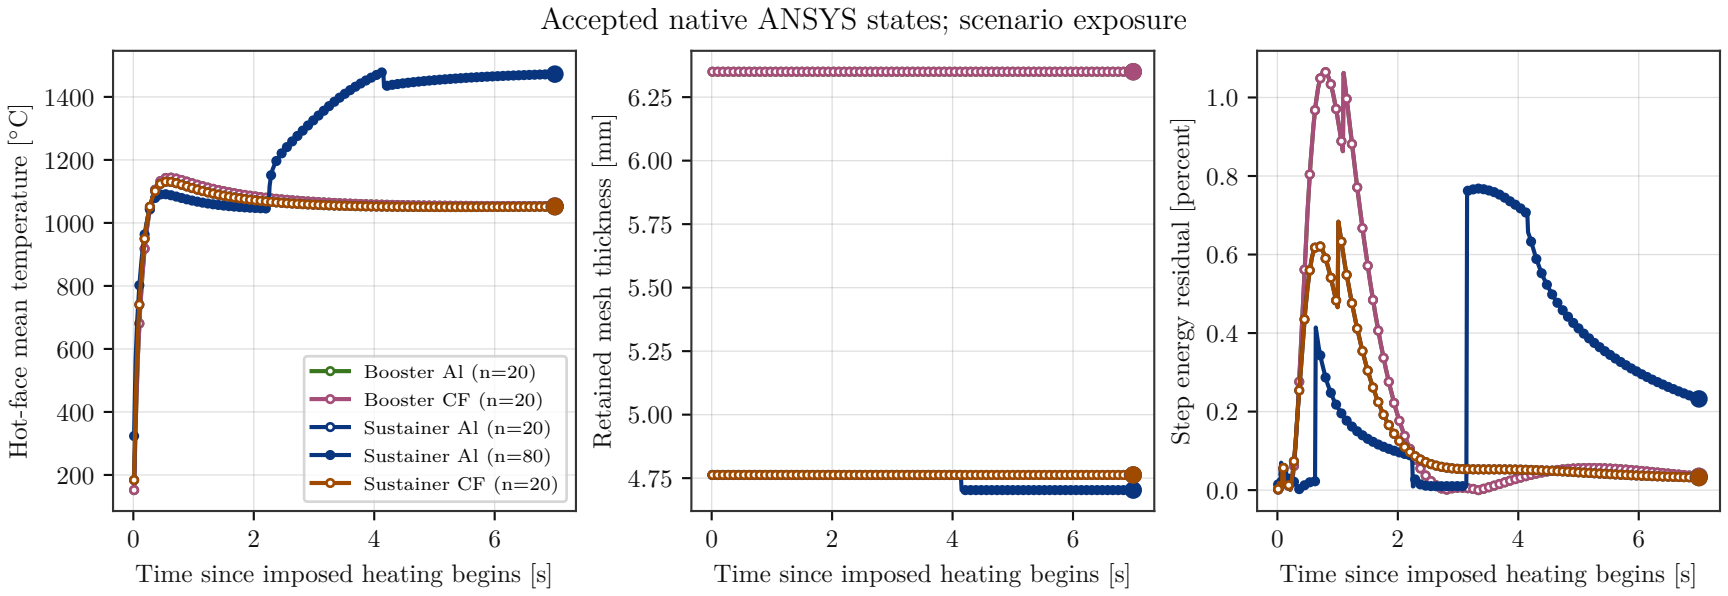

Accepted native ANSYS states; scenario exposure
Hot-face mean temperature [°C]
Time since imposed heating begins [s]
Booster Al (n=20)
Booster CF (n=20)
Sustainer Al (n=20)
Sustainer Al (n=80)
Sustainer CF (n=20)
Retained mesh thickness [mm]
Time since imposed heating begins [s]
Step energy residual [percent]
Time since imposed heating begins [s]