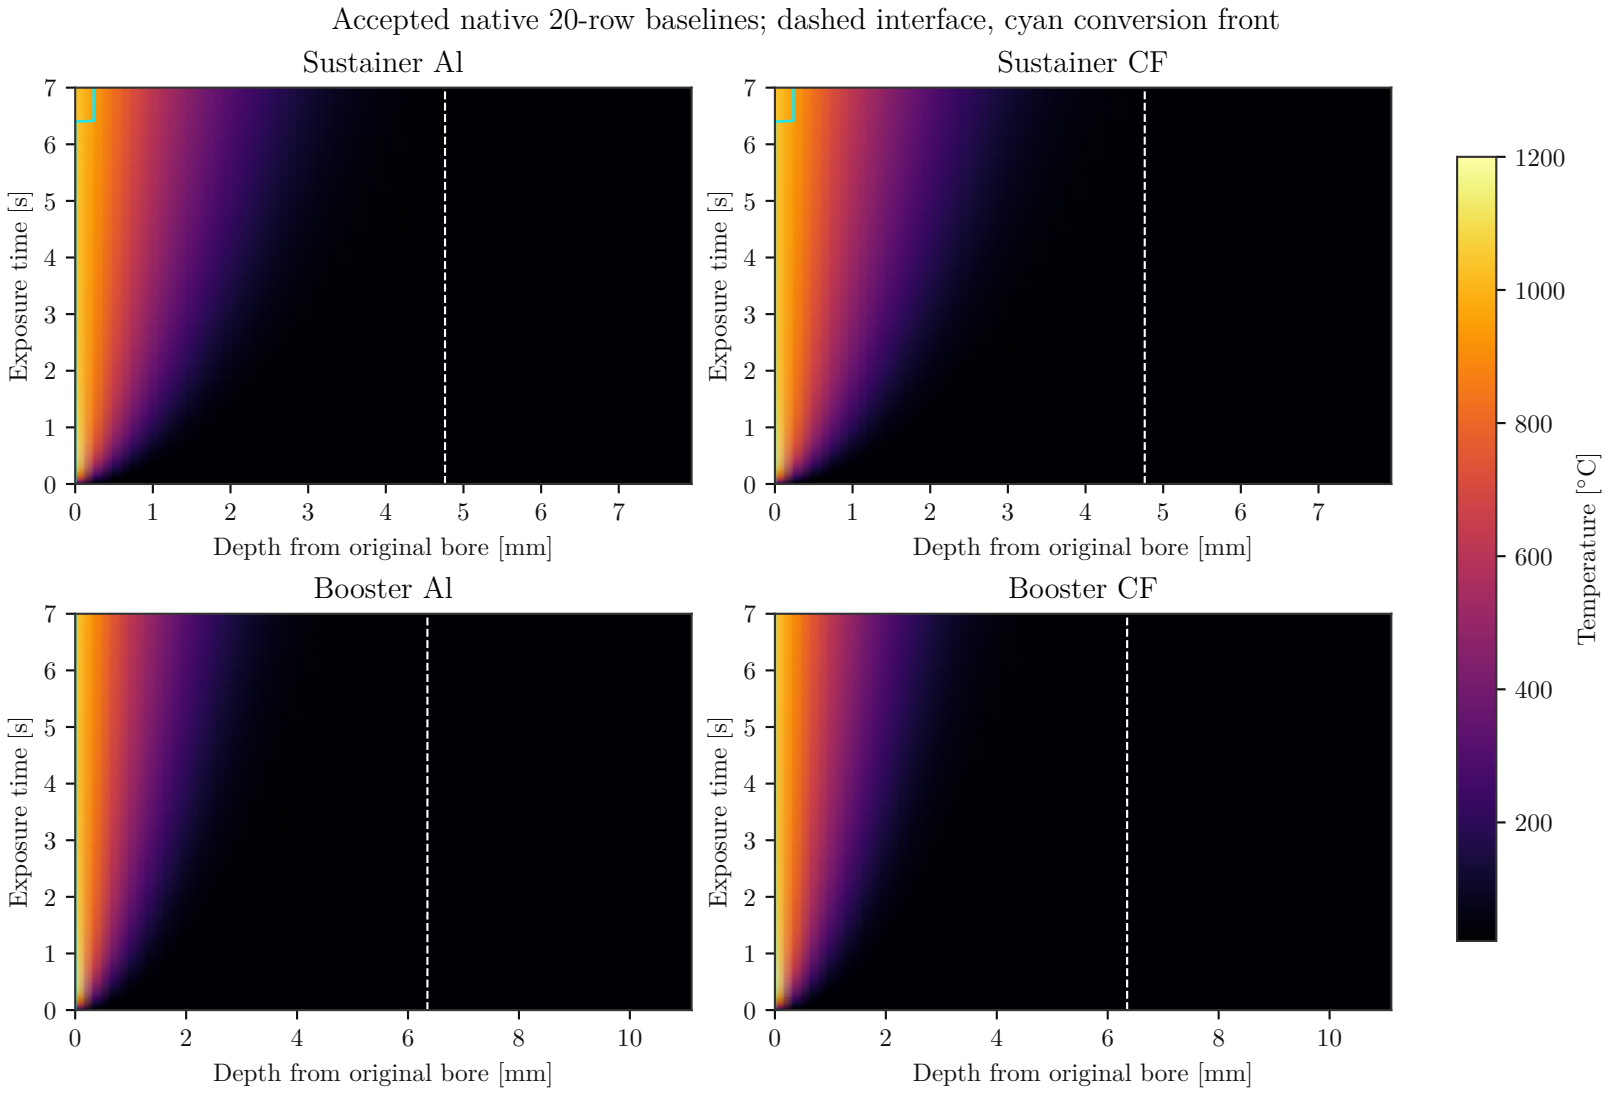

Accepted native 20-row baselines; dashed interface, cyan conversion front
Sustainer Al
Sustainer CF
Booster Al
Booster CF
Exposure time [s]
Depth from original bore [mm]
Temperature [°C]
0
1
2
3
4
5
6
7
8
10
200
400
600
800
1000
1200