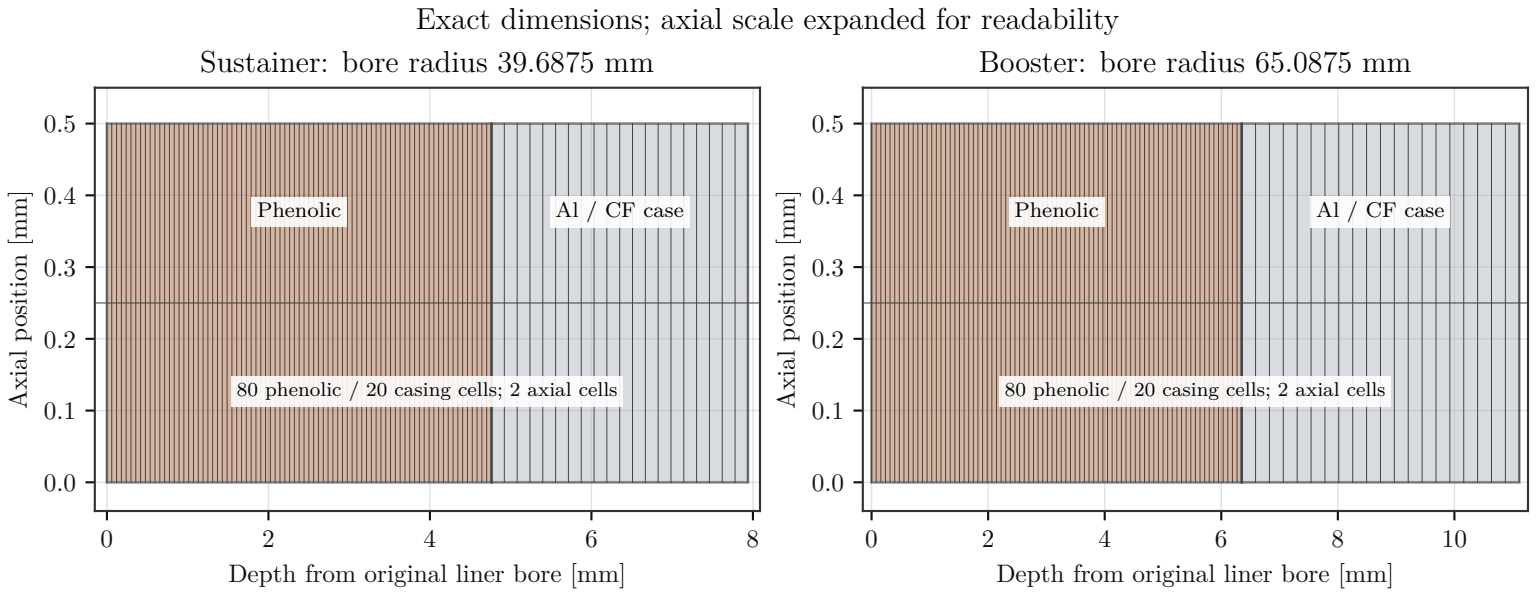

Exact dimensions; axial scale expanded for readability
Sustainer: bore radius 39.6875 mm
Booster: bore radius 65.0875 mm
Phenolic
Al / CF case
80 phenolic / 20 casing cells; 2 axial cells
Axial position [mm]
Depth from original liner bore [mm]
0.0
0.1
0.2
0.3
0.4
0.5
0
2
4
6
8
10