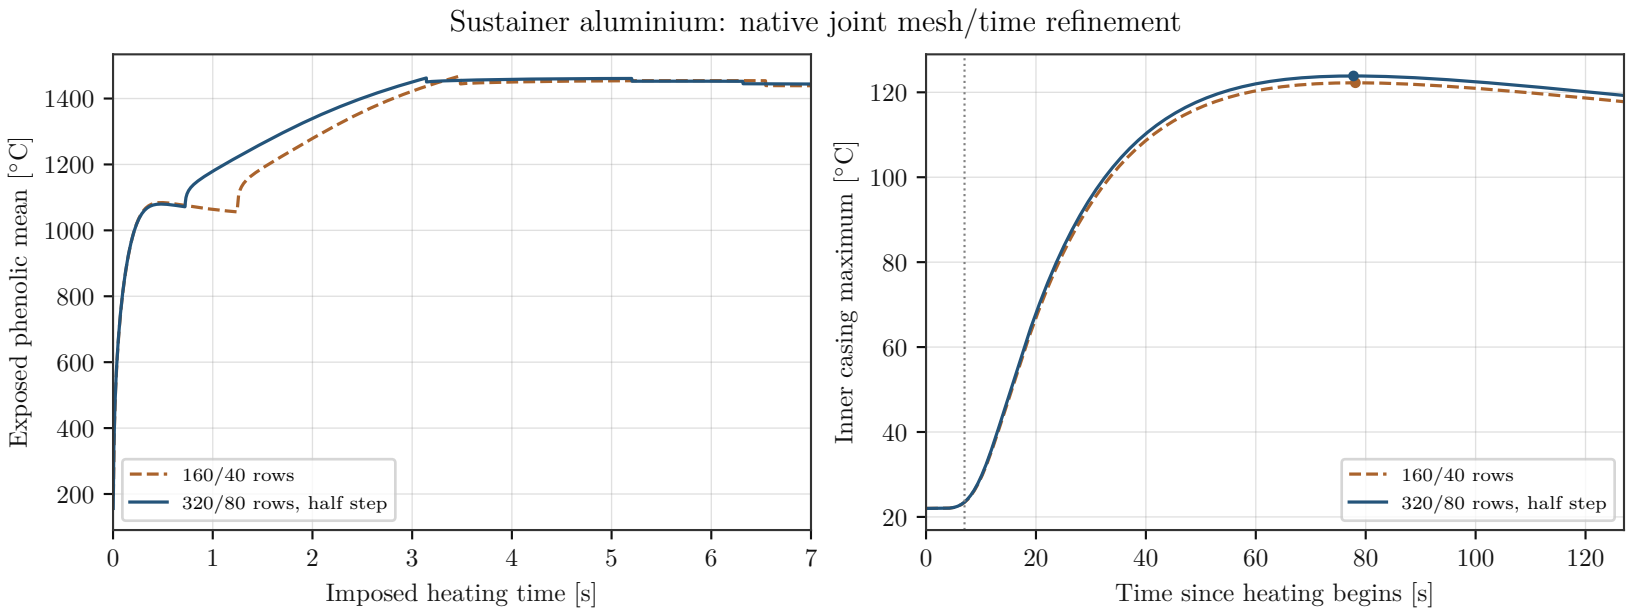

Sustainer aluminium: native joint mesh/time refinement
Exposed phenolic mean [°C]
Imposed heating time [s]
160/40 rows
320/80 rows, half step
Inner casing maximum [°C]
Time since heating begins [s]
160/40 rows
320/80 rows, half step